
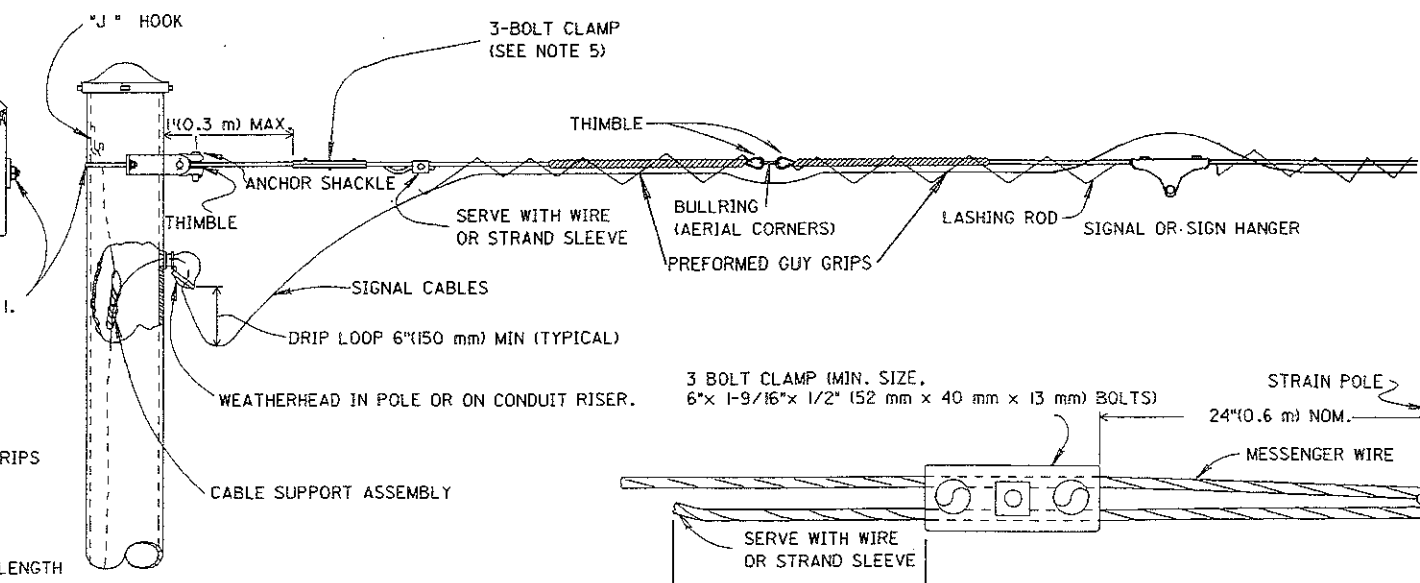


### INTERCONNECT AND LOOP DETECTOR LEAD-IN ATTACHMENT DETAIL


### NOTES

- Messenger wire pole attachment shall be by a pole clamp on steel poles and be a 5/8" (16 mm) thru-bolt (or thimble-eye bolt) with washers on wood poles.
- The pole mounted type splice enclosure may be used as an alternative splice method unless otherwise specified in the plans. Pole attachment shall be by means of passivated stainless steel banding or tapped screws on steel poles and lag screws on wood poles. The box shall be gasketed and weathertight, and hot dipped galvanized if constructed of steel. Minimum box requirements shall be 8" x 8" x 4" (200 mm x 200 mm x 100 mm) with 12 terminal connections (20 amp).
- The interconnect or loop detector lead-in cable shall have a sag between 3% and 5% or match existing utility lines.
- The interconnect or loop detector lead-in messenger wire shall be grounded at the first and last poles in a cable run and at intervals not to exceed 1200 feet (366 m). When attached to wood poles, the messenger wire shall be grounded by bonding to an existing ground rod. The messenger wire shall be bonded to grounded steel poles by use of a 1/2" bolt, drilled and tapped into the pole.
- The minimum 3-bolt size clamp shall be 6" (152 mm) long with 1/2" (13 mm) diameter bolts. Preformed guy grips shall not be used to attach the messenger wire to the signal poles. Their use is limited to bullring attachments.
- The alternate messenger wire attachment shall only be allowed on round, tapered steel strain poles.

### DOWN GUY ASSEMBLY

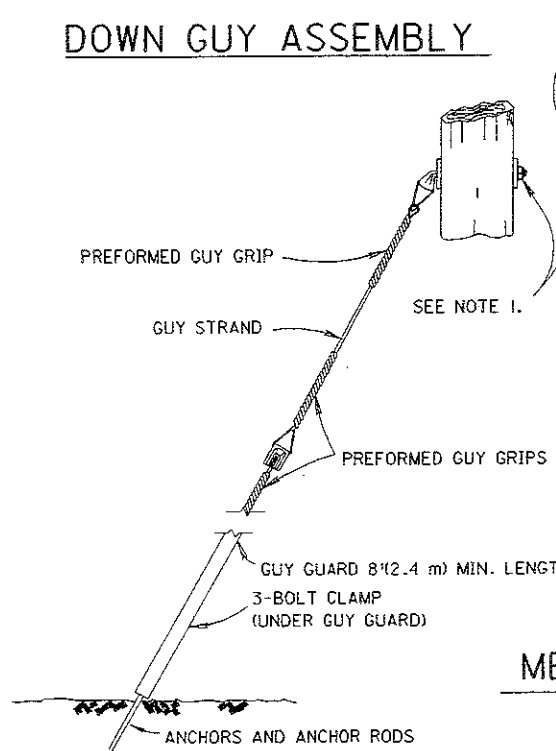

### MESSENGER WIRE WITH ACCESSORIES

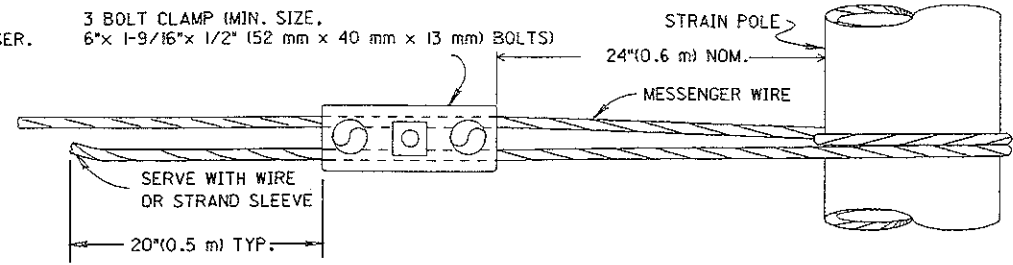

### ALTERNATE MESSENGER WIRE ASSEMBLY