


☉ CURVE DATA

- ① Δ = 50°00'00"  
R = 238.00'  
T = 110.98'  
L = 207.69'  
Ch = 201.11'
- ② Δ = 81°16'09"  
R = 133.00'  
T = 114.13'  
L = 188.65'  
Ch = 173.23'
- ③ Δ = 90°00'00"  
R = 58.00'  
T = 58.00'  
L = 91.11'  
Ch = 82.02'

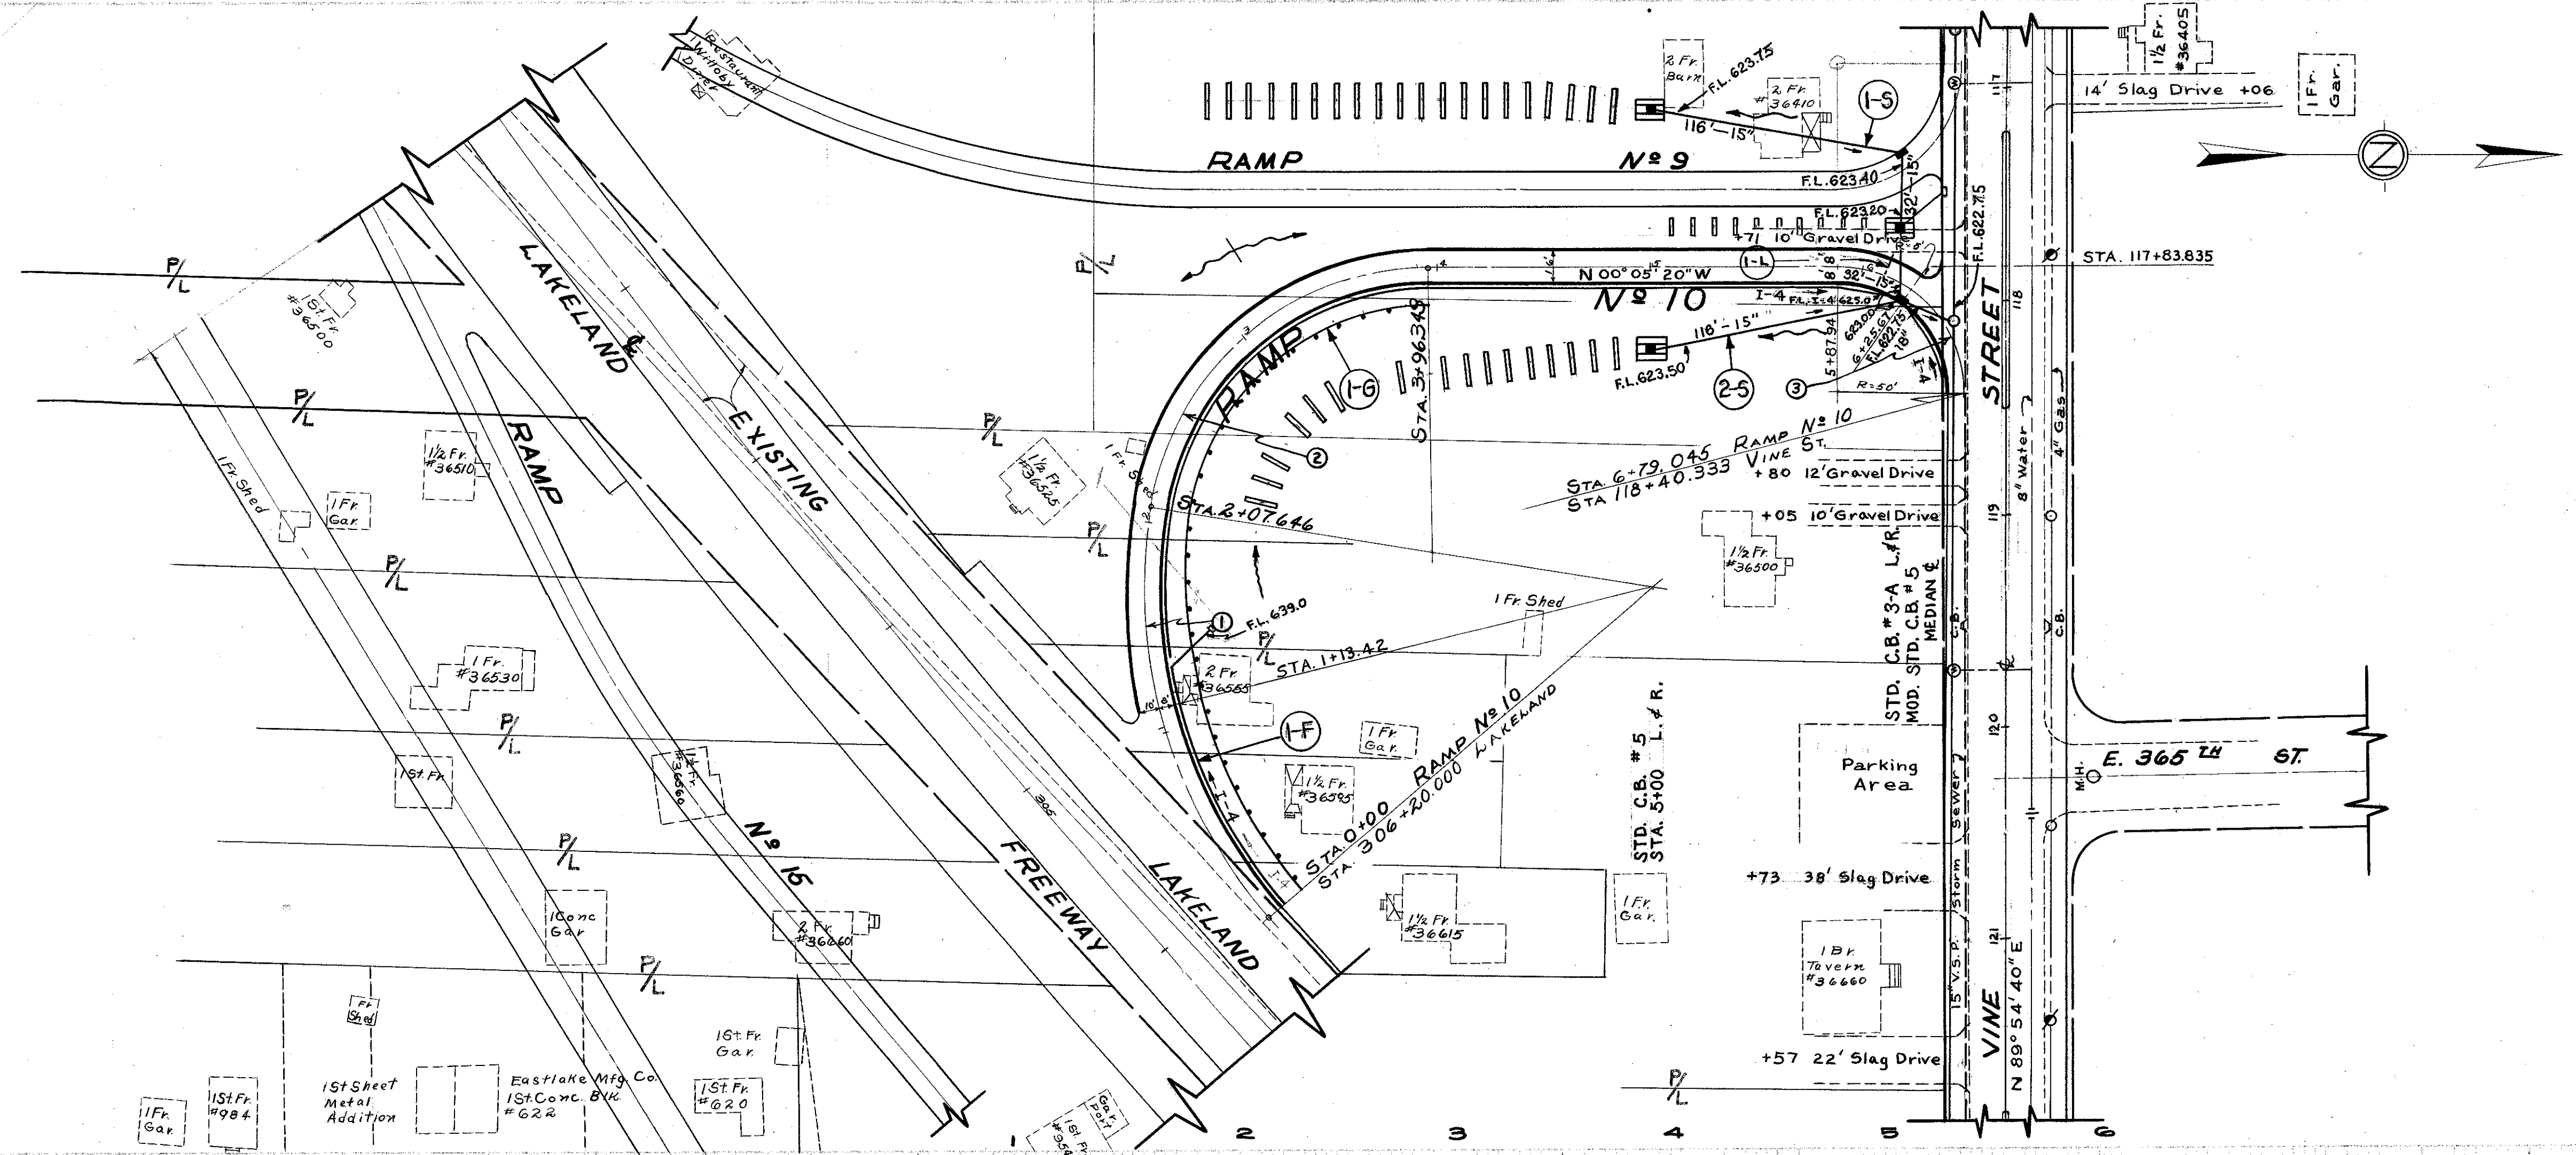


I-15 GUARD RAIL			
REF. No	STATIONS	SIDE	STANDARD
	FROM TO		LIN. FT.
I-G	0+00 3+90	R	344.0

STORM SEWERS								
REF. No	STATION	SIDE R. OR L.	I-2 LIN. FT.		I-8 EACH		L-10	
			CLASS. "A"	M.S. (UNDER PAVT.)	STD. C.B. #3-A	STD. C.B. #5	SOODING	
I-S	5+00 6+20±	L	15"	32	1	1		
2-S	5+00 6+20±	R	116	32	1	1		
	2+00 6+20±	BOTH					122	
TOTALS			232	64	2	2	1	122

6" UNDERDRAINS					
REF. No	STATION	SIDE R. OR L.	I-4 LIN. FT.		I-5 EACH
			SHALLOW PIPE	8" OUTLET BEND	60°
I-F	0+00 6+79	R	658	10	1

5-25 ELECTRICAL DUCT			
REF. No	LOCATION	SIZE	LENGTH
	STA		LIN. FT.
I-L	6+10	2-2"	21

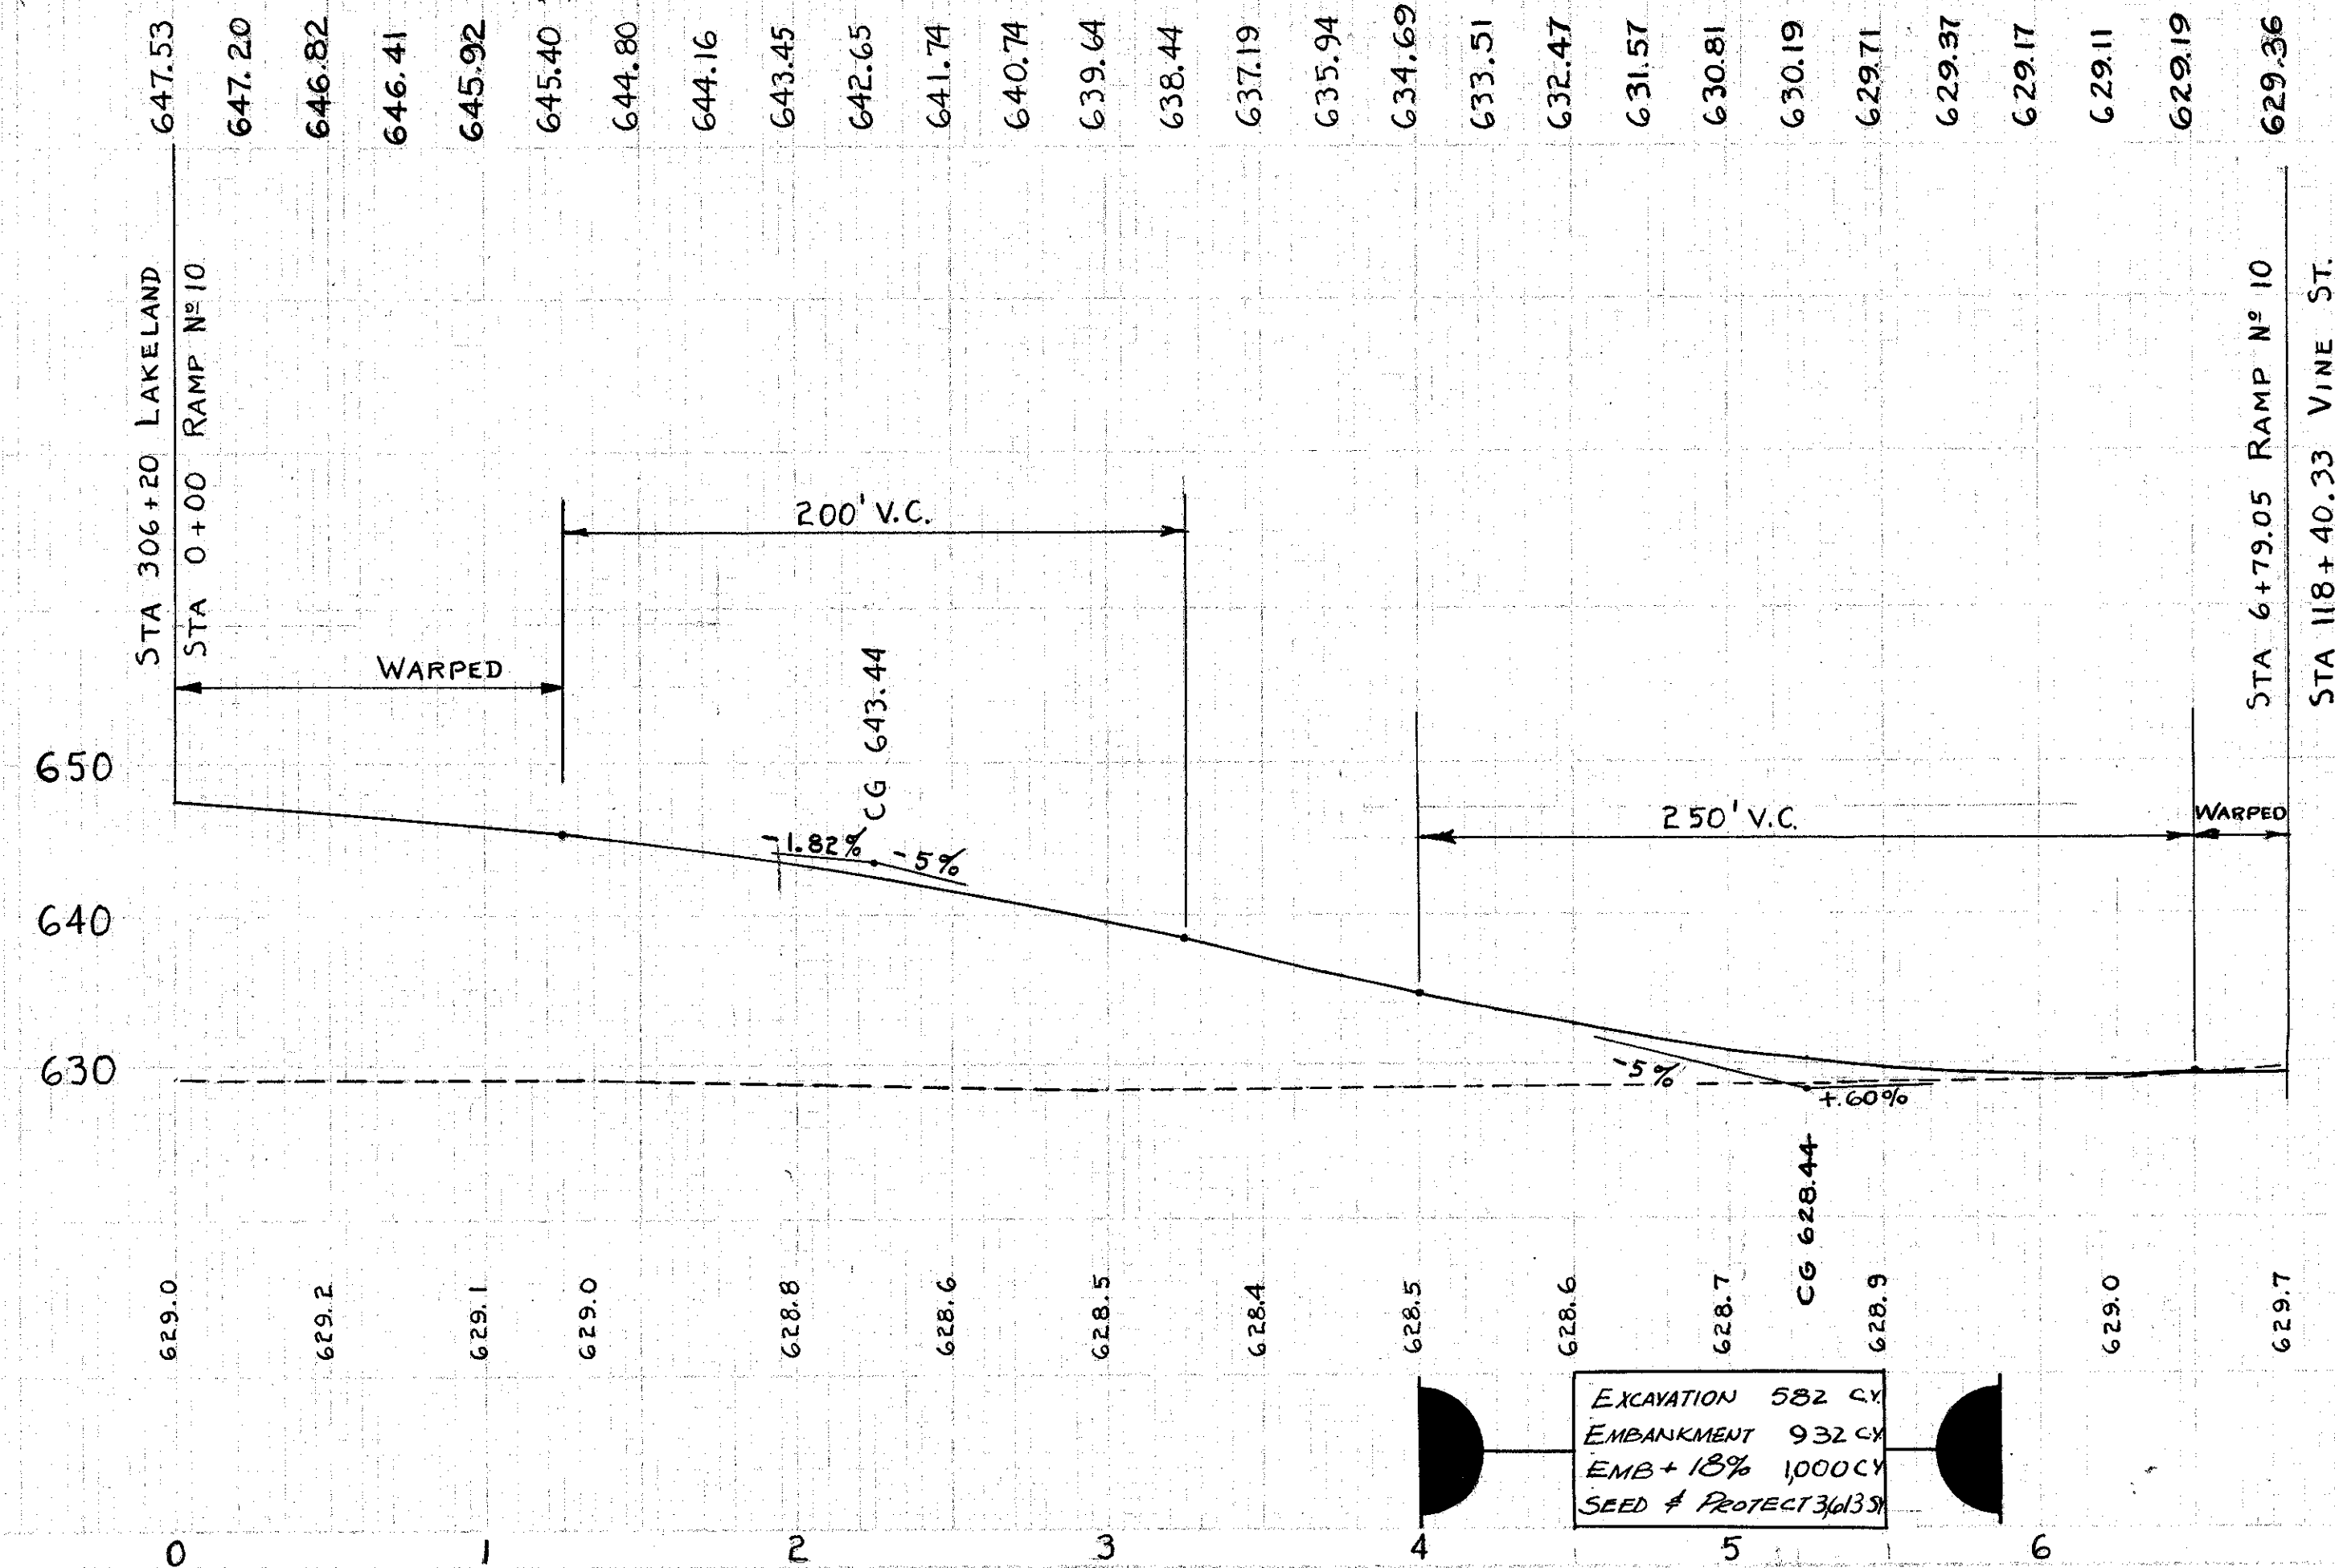

PLAN & PROFILE RAMP No 10 STA. 0+00 to STA. 6+79.045