



FORWARD ABUTMENT BACKWALL SECTION

LAK-615-0402 FORWARD APPROACH SLAB										
MARK	NO. REQUIRED		LENGTH	TYPE	A	B	C	D	H	WEIGHT (LBS)
		TOTAL								
PHASE I										
ED802		8	4'-3"	48	12	1'-5"	1'-5"	1'-5"		91
ED803		9	4'-1"	48	12	1'-5"	1'-3"	1'-5"		98
PHASE II										
ED802		8	4'-3"	48	12	1'-5"	1'-5"	1'-5"		91
ED803		9	4'-1"	48	12	1'-5"	1'-3"	1'-5"		98
EPOXY COATED TOTAL = 378 LBS.										

NOTE: BARS WITH PREFIX OF "ED" ARE EPOXY COATED.

NOTES:

- FOR ALL OTHER INFORMATION, SEE DRAWING AS-1-81 SHEETS 1 & 2 OF 3.
- SPACING OF "C-BARS" AND "A-BARS" (SEE DRAWING AS-1-81) TO BE ADJUSTED AT LONGITUDINAL JOINT AS REQUIRED.
- "B501 BARS" (SEE DRAWING AS-1-81) SHALL NOT BE CONTINUOUS THROUGH THE LONGITUDINAL JOINT.
- SEE DRAWING BP-3 FOR HOOK BOLT AND HOOK BOLT SPACING DETAILS TO BE USED ALONG LENGTH OF LONGITUDINAL JOINT.

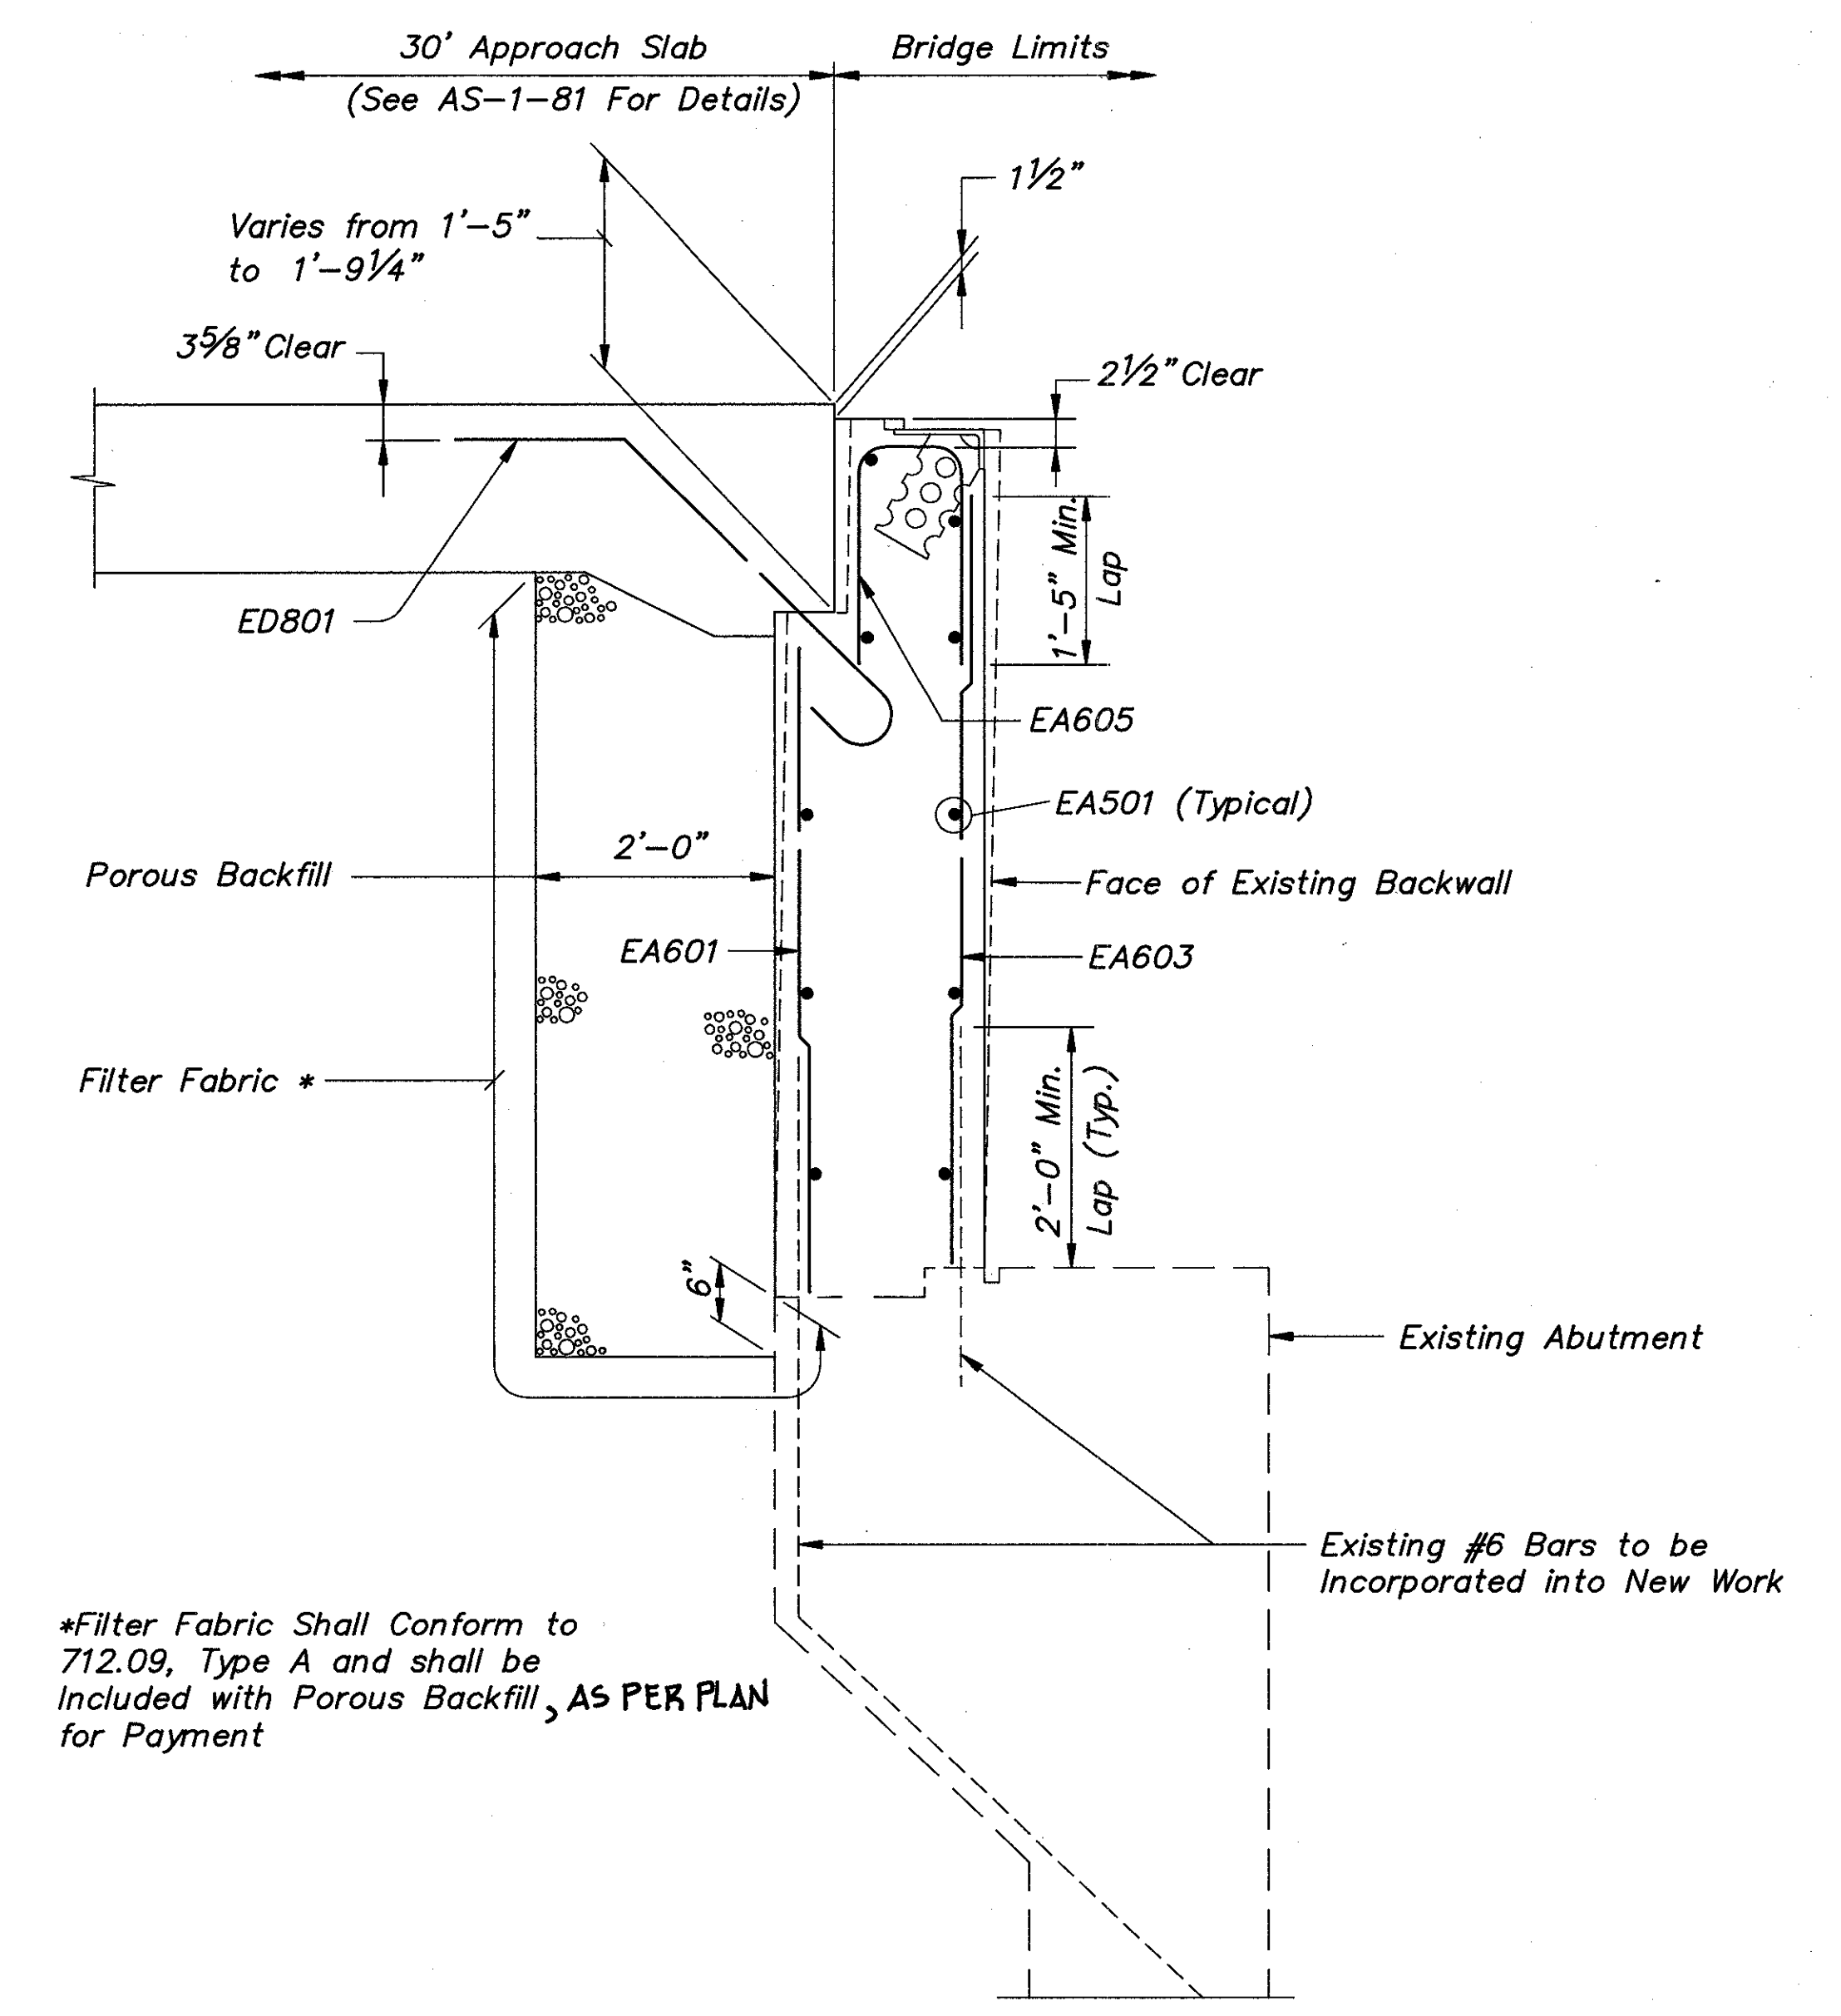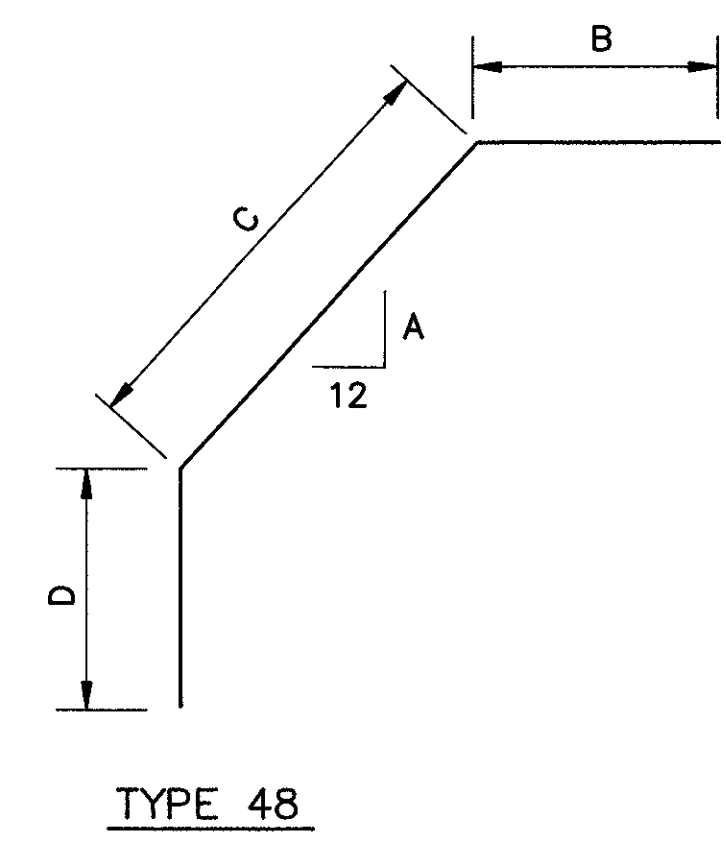

*Filter Fabric Shall Conform to 712.09, Type A and shall be included with Porous Backfill, AS PER PLAN for Payment

SECTION A-A (REAR ABUTMENT)

Notation: E.F.—Each Face, N.F.—Near Face
F.F.—Far Face, L.M.C.—Latex Modified Concrete

COLPETZER-THOMAS, INC. AN ENGINEERING GROUP <small>WILLOUGHBY • MENTOR • NORTH CANTON • STEUBENVILLE • LORAIN</small>		13 / 21				
ABUTMENT DETAILS LAK-615-0402 LAKE COUNTY						
DESIGNED	DRAWN	TRACED	CHECKED	REVIEWED	DATE	REVISED
JPR	R.L.B.	R.L.B.	RJC	JEA	9-22-88	