

D DRAINAGE


REF. NO.	STATION	SIDE	CLASS "A" STORM SEWER UNDER PAVT. SEC. M-6.5 (b) OR M-6.8 (b) 15"	8" I-4 PIPE UNDER DRAIN SHALLOW	6" I-5 60° BEND	I-8 STD. #4 CATCH BASIN	S-1 CONC. FOR STRUCT. CL."C"	S-4 REINF. STEEL LBS.	E-2 EXC. FOR STRUCT. C.Y.	L-10 SODDING S.Y.
I-D	495+00	505+00	LT.	10	1010					
2-D	495+00	505+00	LT.	10	1014					
3-D	495+00	505+00	RT.	10	1014					
4-D	495+00	505+00	RT.	10	1024					
5-D	498+75		CL.	88			3.1	146	6	57

S STRUCTURES

REF. NO.	STATION	SIDE	E-2 EXC. FOR STRUCT.	S-1 CONC. FOR STRUCT. CL."C"	S-4 REINF. STEEL LBS.	S-27 76" x 48" PIPE FOR RDWY. CULVERTS SEC. M-206.6 (b)	L-10 SODDING S.Y.	E-3 CHANNEL EXC. C.Y.
I-S	498+94		125	396	1564	192	10	1188

R ROADWAY

REF. NO.	STATION	SIDE	I-15 GUARD RAIL STEEL BEAM BARRIER TYPE (DEEP)	I-15 GUARD RAIL STEEL BEAM STD. TYPE (DEEP)
1-R	498+00	500+62.5	LT.	262.5
2-R	499+00	500+12.5	CL.	87.5
3-R	499+70	500+80	CL.	87.5
4-R	498+25	500+62.5	RT.	237.5
TOTALS			50	675.0

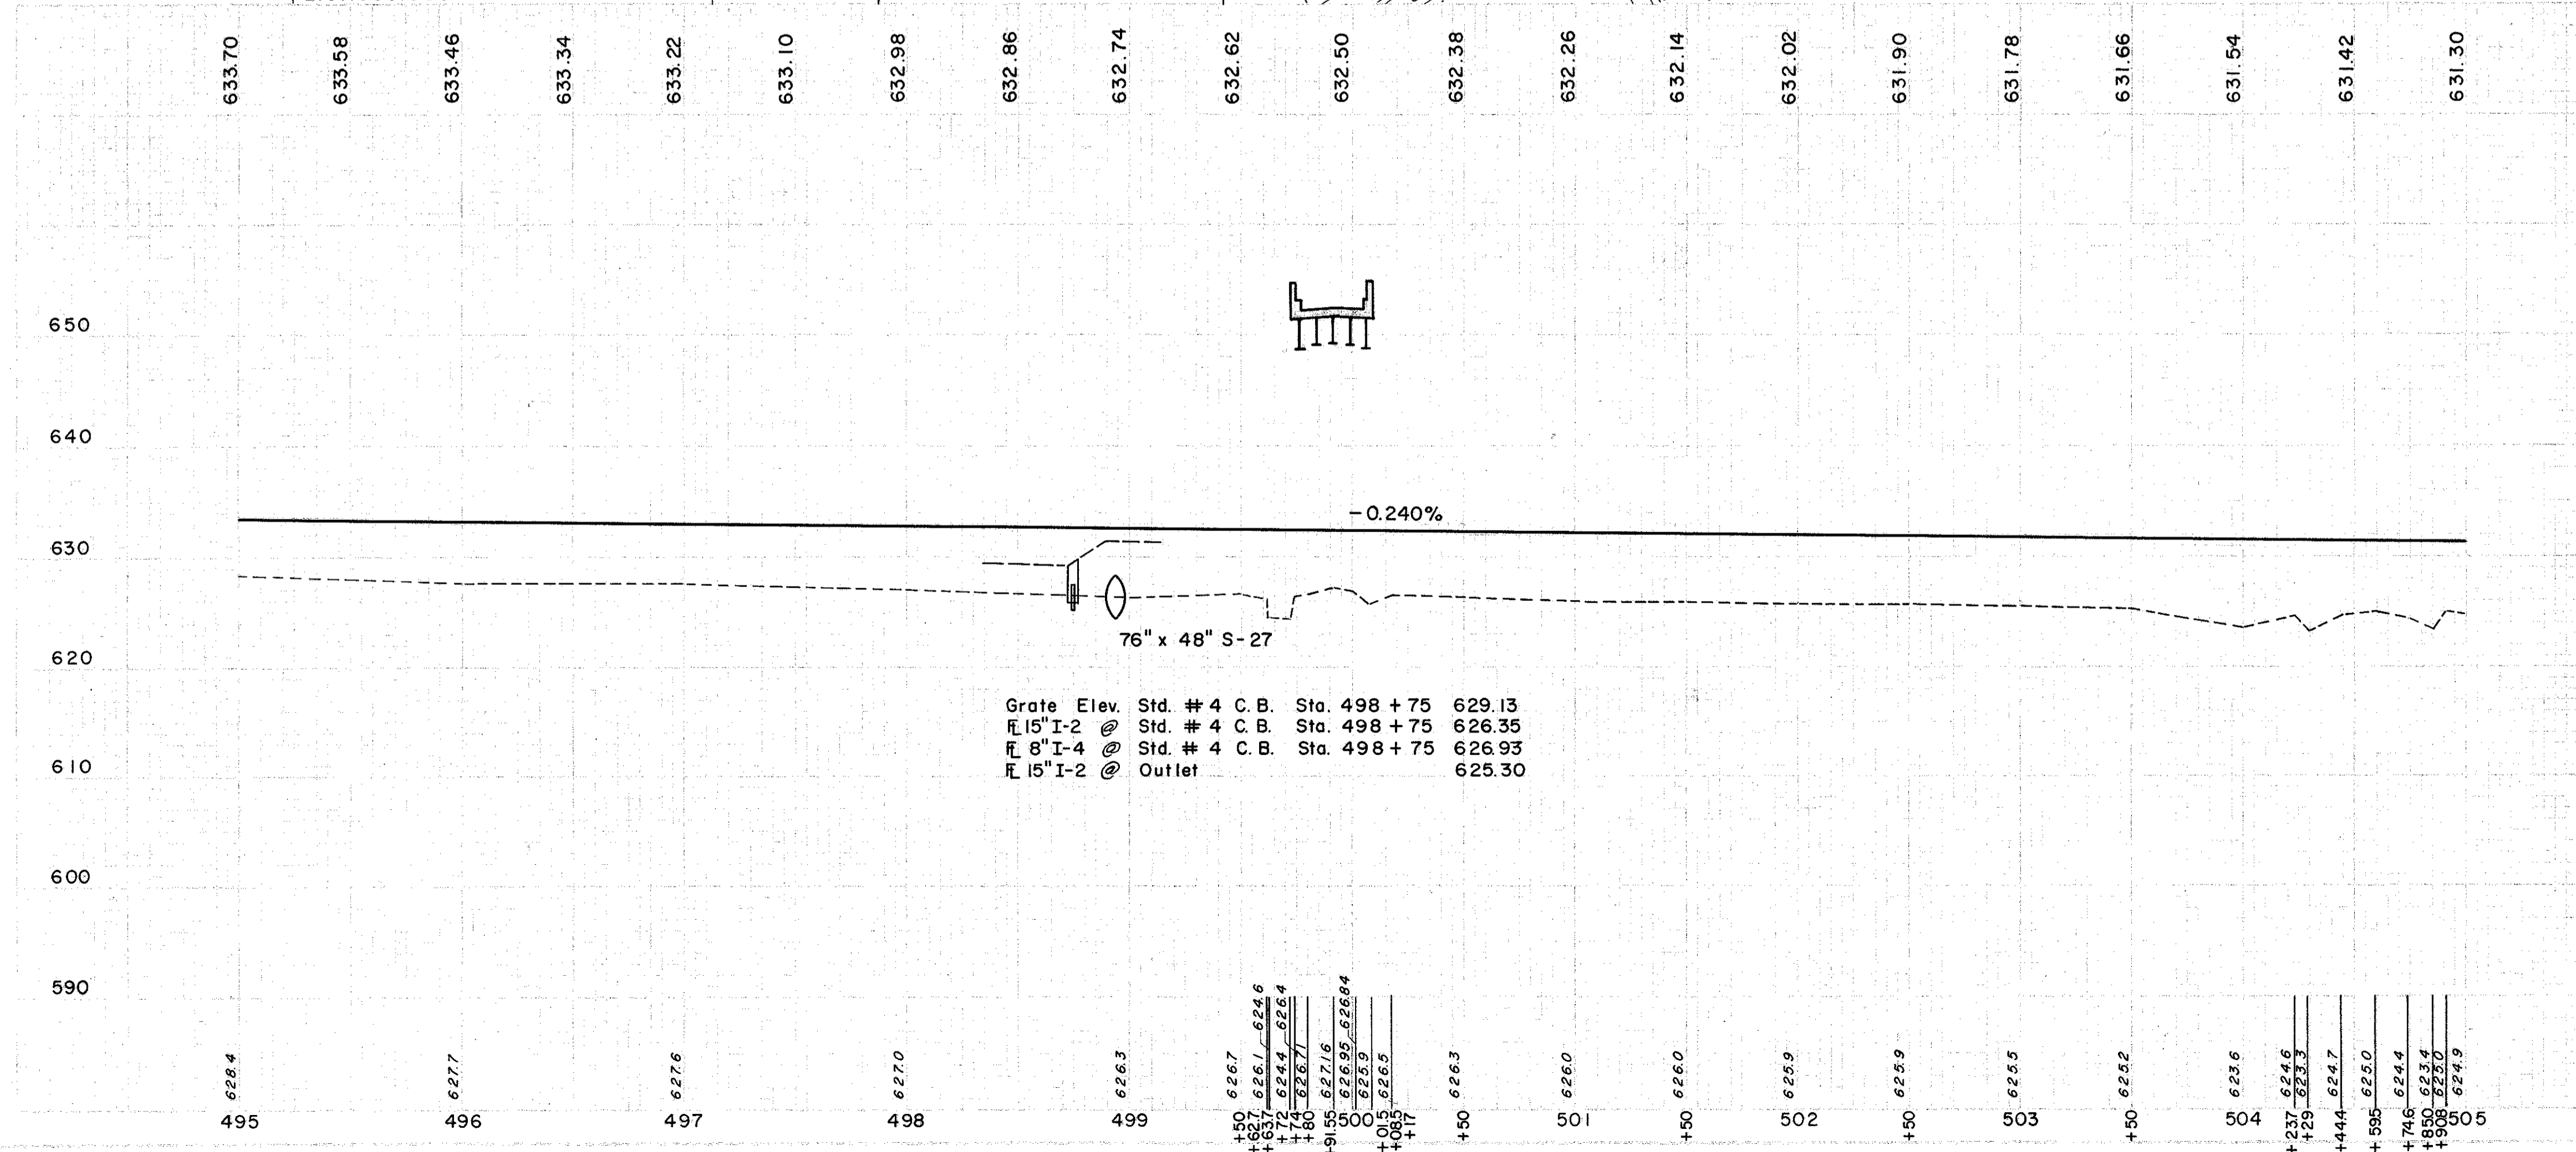

MICROFILMED
JUL 1 1985

Excavation	1,019 C.Y.
Structure	29,718 C.Y.
Barriers	20
Sodding	35,662 C.Y.