

MICROFILMED
1022

GEOLOGY OF THE SITE

The structure site is located on a flat portion of the glaciated Mississippi Valley Plain, just south of the Lake Plain, where moderately deep to deep drift, found to be at least 61 feet in depth, overlies bedrock of Upper Devonian or Lower Mississippian ages.

EXPLORATION

The exploration consisted of six drive sample borings and thirteen drive rod penetration tests, made between December 21, 1965, and January 14, 1966.

INVESTIGATIONAL FINDINGS

















Borings disclosed moist, stiff to very stiff silt clays with some sand and gravel to 5 to 20-foot depths, elevations 786 to 769 feet; below this, moist, generally dense to extremely dense sandy and gravelly silts. Borings were terminated at 41- to 61-foot depths, elevations 745 to 733 feet, after penetrating more than 30 feet of materials requiring in excess of 30 blows per foot in the standard penetration test.

Rod soundings met increasing penetration resistance with increasing depth and were terminated upon encounter with very high resistance, near refusal, or refusal to penetration at 20 to 27-foot depths, between elevations 774 and 763 feet, considered to be in extremely dense sandy gravelly silts, as revealed by the borings.












No test penetrated to bedrock.

No free water was observed in any of the rod sounding holes.

LEGEND

-  Auger Boring Location - Plan View.
-  Press and / or Drive Sample and / or Core Boring Location - Plan View.
-  Drive Rod Penetration Resistance Sounding Location - Plan View.
-  Capped Pile
-  Footing
-  Footing on Pile
-  TR Top of Rock
-  Horizontal Bar on Boring Log Indicates the Depth the Sample Was Taken.
-  Figures Beside the Boring Log in Profile Indicate the Number of Blows for Standard Penetration Test.
X = Number of Blows for First 6 inches.
Y = Number of Blows for Second 6 inches.
-  Drive Rod Penetration Resistance Sounding Log - Profile
-  Casing
-  Resistance "R" < 10,000 lbs.
-  Resistance "R" > 10,000 lbs.
-  Z Indicates Final Measurement of Penetration, in Inches.
-  W Indicates Free Water Elevation.
-  Indicates Static Water Elevation.

SYMBOLS OF ROCK TYPES

-  Coal
-  Weathered Indurated Clay
-  Indurated Clay
-  Weathered Shale
-  Shale
-  Weathered Sandstone
-  Sandstone
-  Leached Dolomite
-  Dolomite
-  Leached Limestone
-  Limestone

GENERAL INFORMATION

Drive Rod Penetration Sounding Tests

Drive rod penetration resistance tests constitute driving a 1.315-inch diameter steel rod, with a 45° cone point, into the ground, using a 122-pound drop-hammer with a free fall of five feet. At one or two-foot depth intervals, a measurement is taken to determine the amount of penetration achieved in three hammer drops. This reading is converted to an empirical value for capacity "R", in thousands of pounds (which is a measure of both the point resistance and frictional resistance on the rod), by using charts prepared by the Ohio Department of Highways, Bureau of Bridges, on the basis of correlation study of rod penetration with past performance of pile driving. For interpretation, a graph is prepared by plotting the value "R" against the depth at which the reading was taken, and connecting the plotted points. The curve so obtained reflects the density of subsurface materials in a manner that can be readily compared with data from similar tests at other locations on the structure site. From this comparison, the overall uniformity of subsurface condition may be evaluated.


Drive Sample Borings - Drive-Press Sample Borings

Drive sample borings are made by means of a rotary-type drill rig, employing a 2" O.D., 1-3/8" I.D. sampler, at 2-1/2 and / or 5-foot depth intervals, driven by means of a 140 - pound drop-hammer with a free fall of 30 inches. The number of blows required to drive the sampler 12 inches is considered the standard penetration test.

Drive-press sample borings are made by means of a rotary-type drill rig, employing a 2" O.D., 1-3/8" I.D. drive sampler, and 3" O.D. thin-wall press sampler. The press sampler is advanced by continuous uniform pressure, applied by the drill rig.

The boring log sheets show a graphic plot of the information obtained, including depth and elevation of the sample, number of blows for the standard penetration tests in two 6-inch increments, depth of press samples, field sample number, sample description - based on laboratory tests and the Casagrande AC classification system - and gradation, plasticity, and moisture content determinations. Results of strength and consolidation testing, if performed, appear on separate enclosures.

At depths where materials are bouldery or gravelly to the extent that the sampler can not be driven, a wash sample is procured for visual classification, in order to determine the general character of the material. These samples are not considered sufficiently representative to warrant laboratory testing.

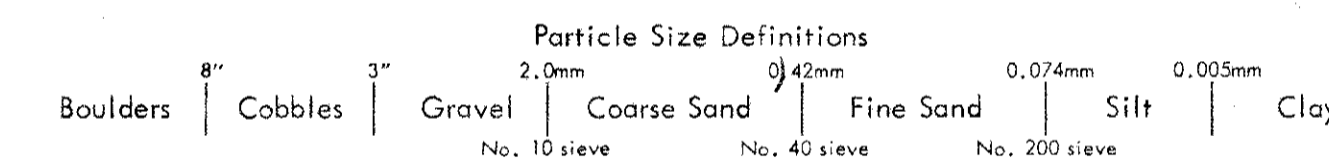

NOTE: Information shown by this subsurface investigation was obtained solely for the use in establishing design controls for the project. The State of Ohio does not guarantee the accuracy of this data and it is not to be construed as a part of the plans governing construction of the project.

OHIO DEPARTMENT OF HIGHWAYS
TESTING LABORATORY
1620 WEST BROAD STREET, COLUMBUS 23, OHIO

STRUCTURE FOUNDATION INVESTIGATION
BRIDGE NO. CUY-1R80-0806 & 0807
OVER SR 237 & RAMPS B-1 & B-5
SR 237 OVER RAMPS B-1 & B-5
SEC. CUY-1R80-

CHECKED BY L.N.L.	REVIEWED BY R.D.R.	DATE 1/25/66
----------------------	-----------------------	-----------------