


# TYPICAL SECTIONS


FED. RD. DIVISION	STATE	PROJECT	7
2	OHIO		313

LAKE COUNTY  
LAK -2- 16.49


TYPE T-71

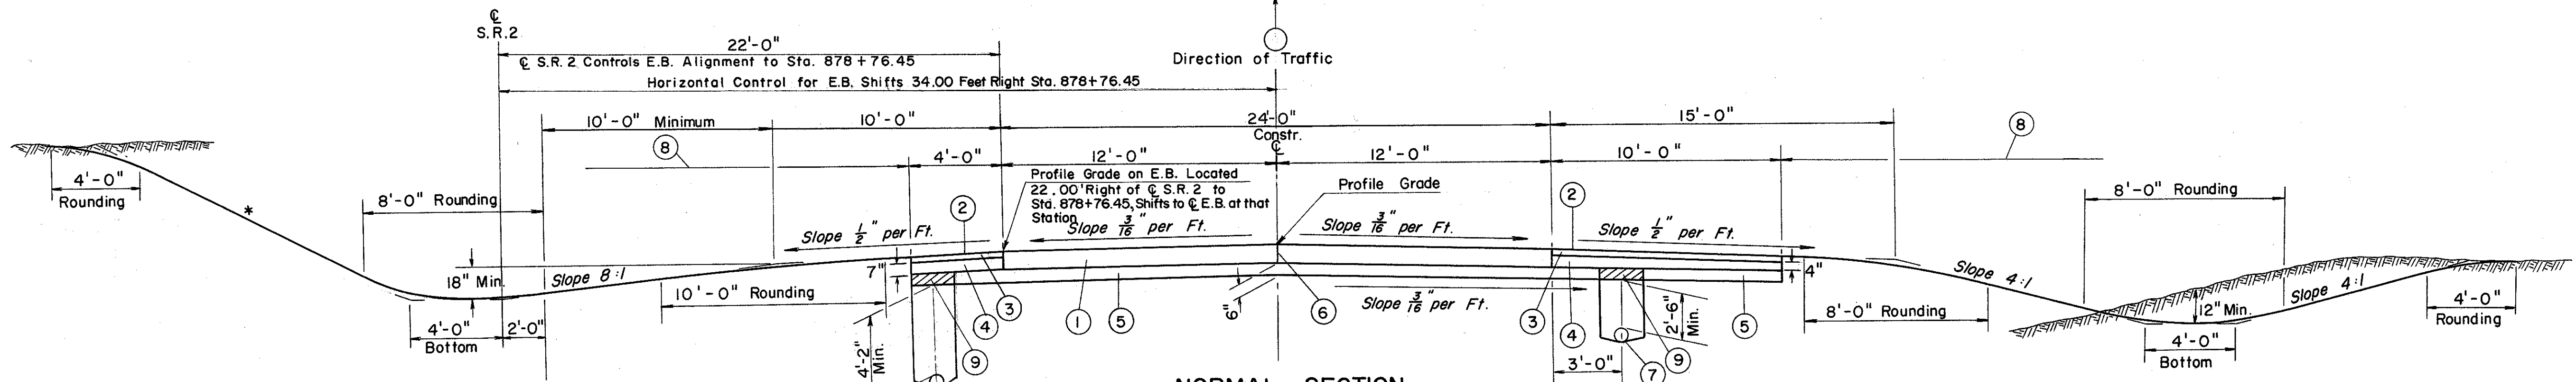

**NORMAL SECTION**  
LIMITING STATIONS  
DIRECTIONAL ROADWAY  
(TRANSITION) STA. 872+00.00 TO S.T. STA. 874+75.00 W.B. LANES  
S.T. STA. 874+75.00 TO T.S. STA. 880+26.37 W.B. LANES  
(TRANSITION) STA. 880+26.37 TO S.C. STA. 883+01.37 W.B. LANES \*\*  
(TRANSITION) STA. 874+01.45 TO STA. 878+76.45 E.B. LANES  
STA. 878+76.45 TO STA. 881+57.43 E.B. LANES \*\*  
(TRANSITION) STA. 881+57.43 TO STA. 884+33.43 E.B. LANES \*\*  
(TRANSITION) STA. 889+36.30 TO STA. 891+00.00 E.B. LANES  
(VARIABLE WIDTH & TRANSITION) STA. 891+00.00 TO STA. 893+66.24 E.B. LANES

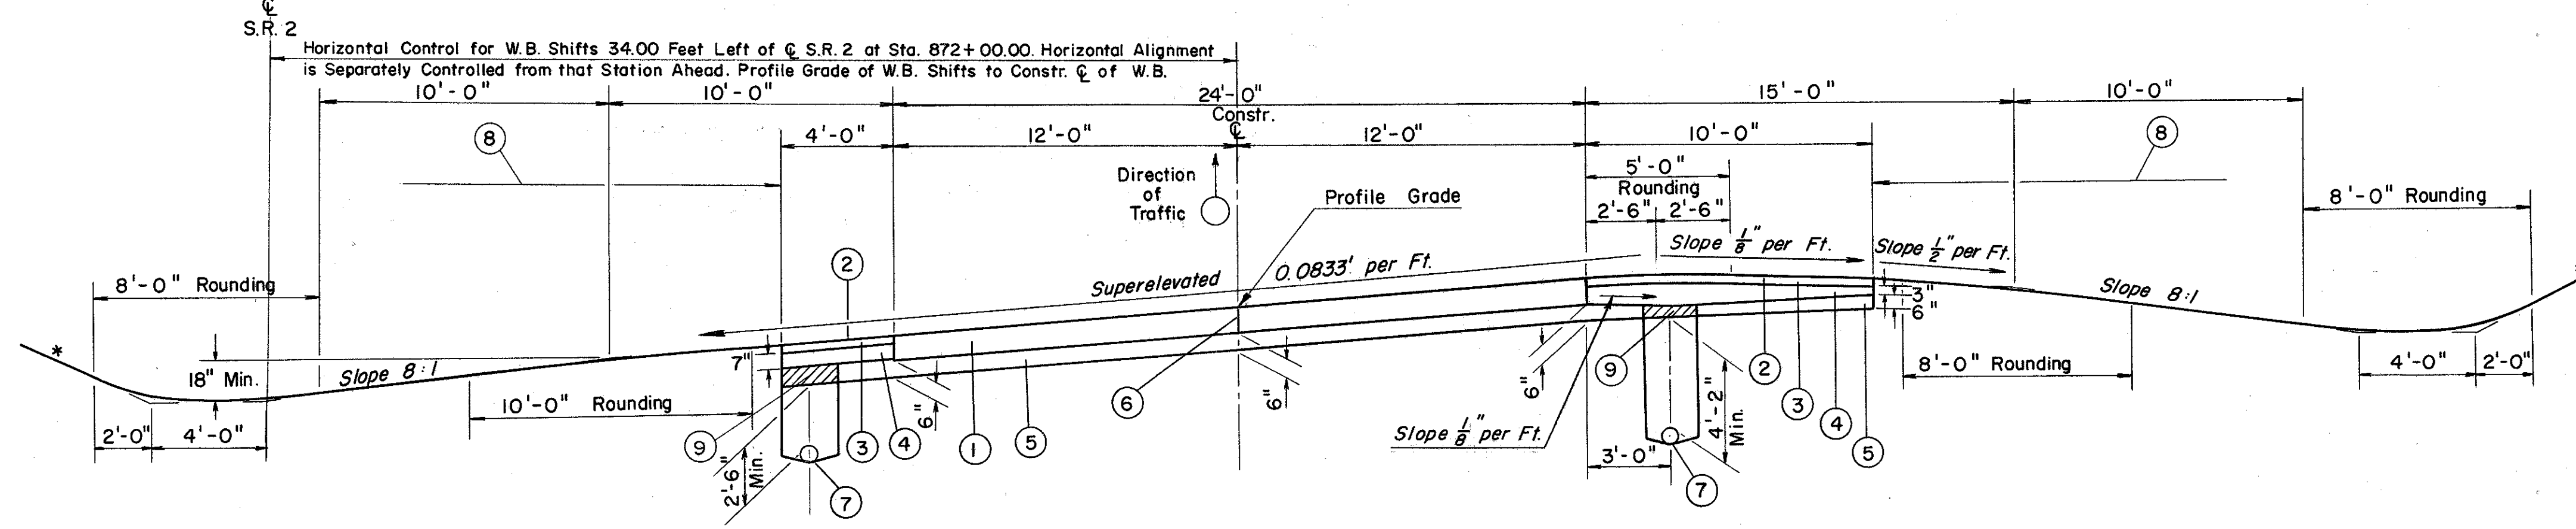

**SUPERELEVATED SECTION**  
LIMITING STATIONS  
DIRECTIONAL ROADWAY  
STA. 884 + 33.43 TO C.S. STA. 889 + 36.30 E.B. LANES \*\*

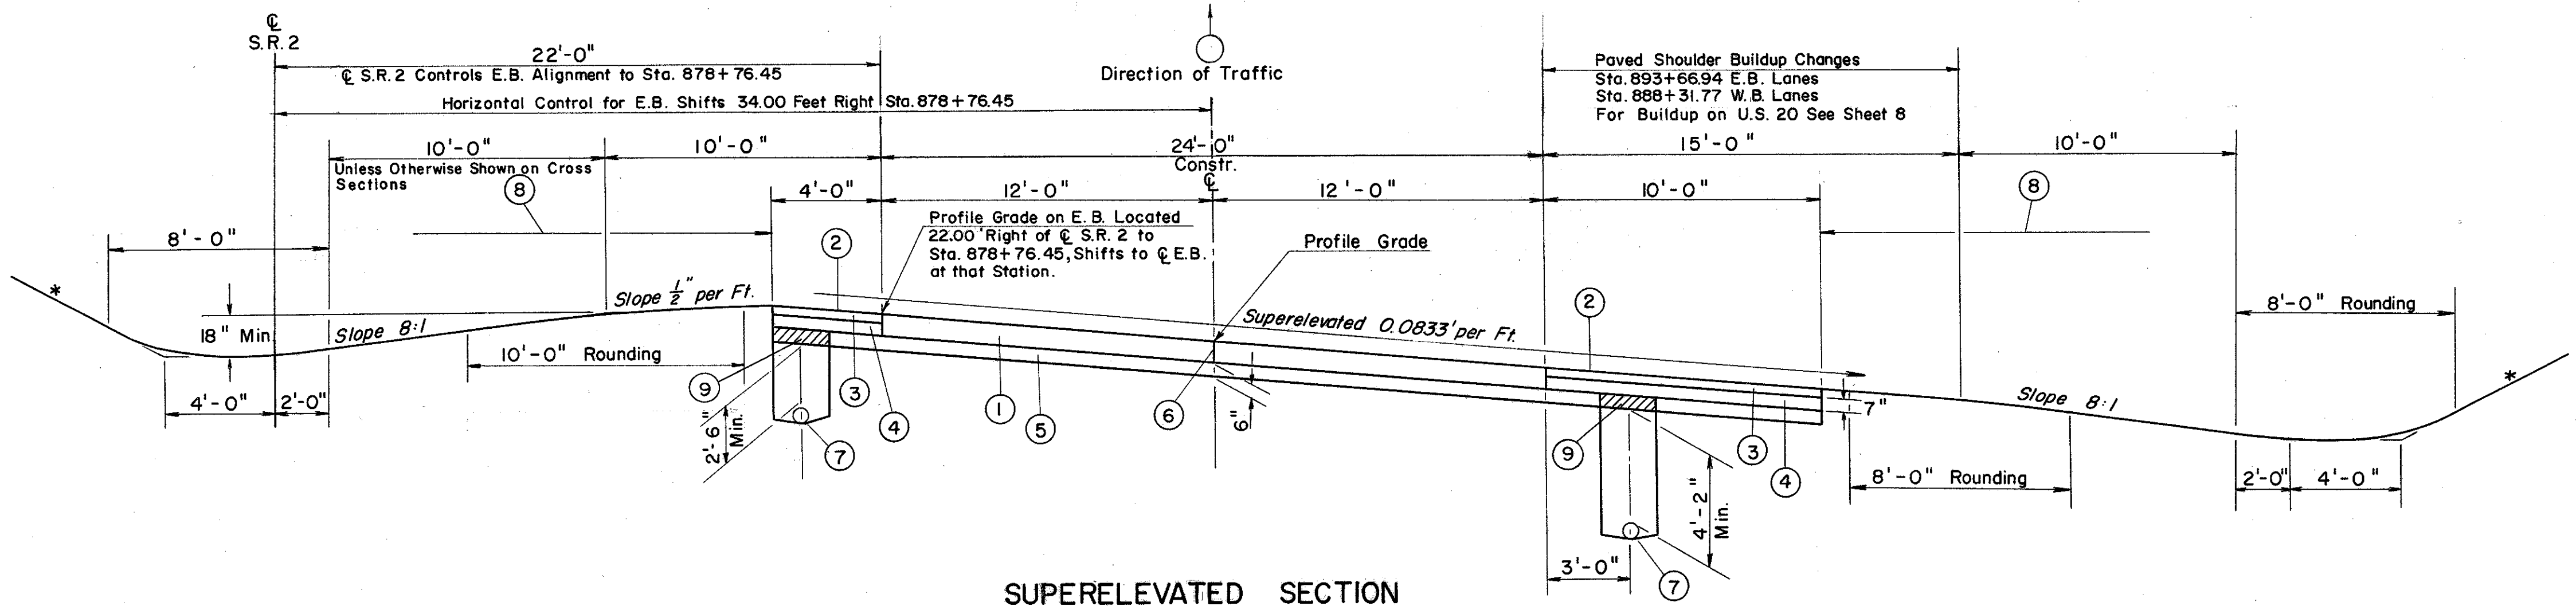

**SUPERELEVATED SECTION**  
LIMITING STATIONS  
DIRECTIONAL ROADWAY  
S.C. STA. 883+01.37 TO STA. 887+34 ± W.B. LANES \*\*  
(VARIABLE WIDTH) STA. 887+34 ± TO STA. 888+31.77 W.B. LANES \*\*  
STA. 872 + 00.00 TO STA. 874+01.45 E.B. LANES

**LEGEND**

- ① T-71 10" Reinforced Portland Cement Concrete Pavement
- ② T-31 Bituminous Surface Treatment using 0.008 C.Y. No. 6 Aggregate and 0.25 Gal. Bit. Mat'l. per S.Y. (See note in proposal)
- ③ B-21 3" Waterproofed Aggregate Base Course, Type "A" T-35 Material may be used in construction of this Course. - See note in proposal
- ④ B-112 Porous Base Course
- \*\* ⑤ I-22 Variable Depth Subbase, Grading A or B Modified as per General Notes
- ⑥ Standard Longitudinal Joint
- ⑦ I-1 6" Pipe Class I-3
- ⑧ L-9 Seeding and Protecting
- ⑨ Remove Subbase for width of Item I-1 and replace with Type 3 Backfill immediately prior to placing the Item B-112 Porous Base Course. Cost shall be included in price bid per Lin. Ft. for item I-1.
- \* Note: See Grading Plan and Cross Sections.
- \*\* Note: See Non-Performance note in General Notes per I-22.
- ∅ Note: Thickness shown is designed thickness as described in Section B-21.01

**NOTE ON DEPTH OF UNDERDRAIN:**  
All Underdrains in Earth Cut Areas will have a minimum depth of 4'-2" from the bottom of the Subbase to the top of the Pipe.

SCALE: 1/4" = 1'-0"