


SLAB PLAN (LEFT STRUCTURE)

NOTES

- FOR SECTION A-A, SEE SHEET 57/67.
- PLACE THE CONCRETE IN THE ABUTMENT DIAPHRAGM ENCASING THE STRUCTURAL STEEL MEMBERS OF AN INDIVIDUAL PHASE SEPARATELY OR WITH THE DECK CONCRETE OF THAT PHASE. IF THE DIAPHRAGM CONCRETE IS PLACED SEPARATELY, ALLOW AT LEAST 48 HOURS OF SET TIME BEFORE PLACING DECK CONCRETE. LOCATE THE HORIZONTAL CONSTRUCTION JOINT BETWEEN THE DIAPHRAGM AND DECK CONCRETE AT THE APPROACH SLAB SEAT. DUE TO UPLIFT CONCERNS PLACEMENT OF THE CONCRETE IN THE ABUTMENT DIAPHRAGM SHALL BE PLACED PRIOR TO PLACEMENT OF THE CENTER SPAN DECK CONCRETE, BUT MAY BE PLACED WITH THE END SPAN DECK CONCRETE.
- FOR HAUNCH REINFORCEMENT DETAILS, SEE SHEET 58/67.
- FOR ADDITIONAL PANEL DETAILS, SEE SHEET 57/67.
- MINIMUM BAR LAPS: #4 = 30", #5 = 36", #6 = 44"
- FOR LIST OF ABBREVIATIONS, SEE SHEET 4/67.
- ALL PHASES REFERENCED ARE TO BE COMPLETED UNDER STAGE 3 SEQUENCE OF CONSTRUCTION, SEE MOT DRAWINGS.
- ALL PARAPET AND PANEL LENGTHS MEASURED ALONG CURBLINE.
- FOR ABUTMENT DIAPHRAGM REINFORCING, SEE SHEETS 46/67 THRU 53/67.

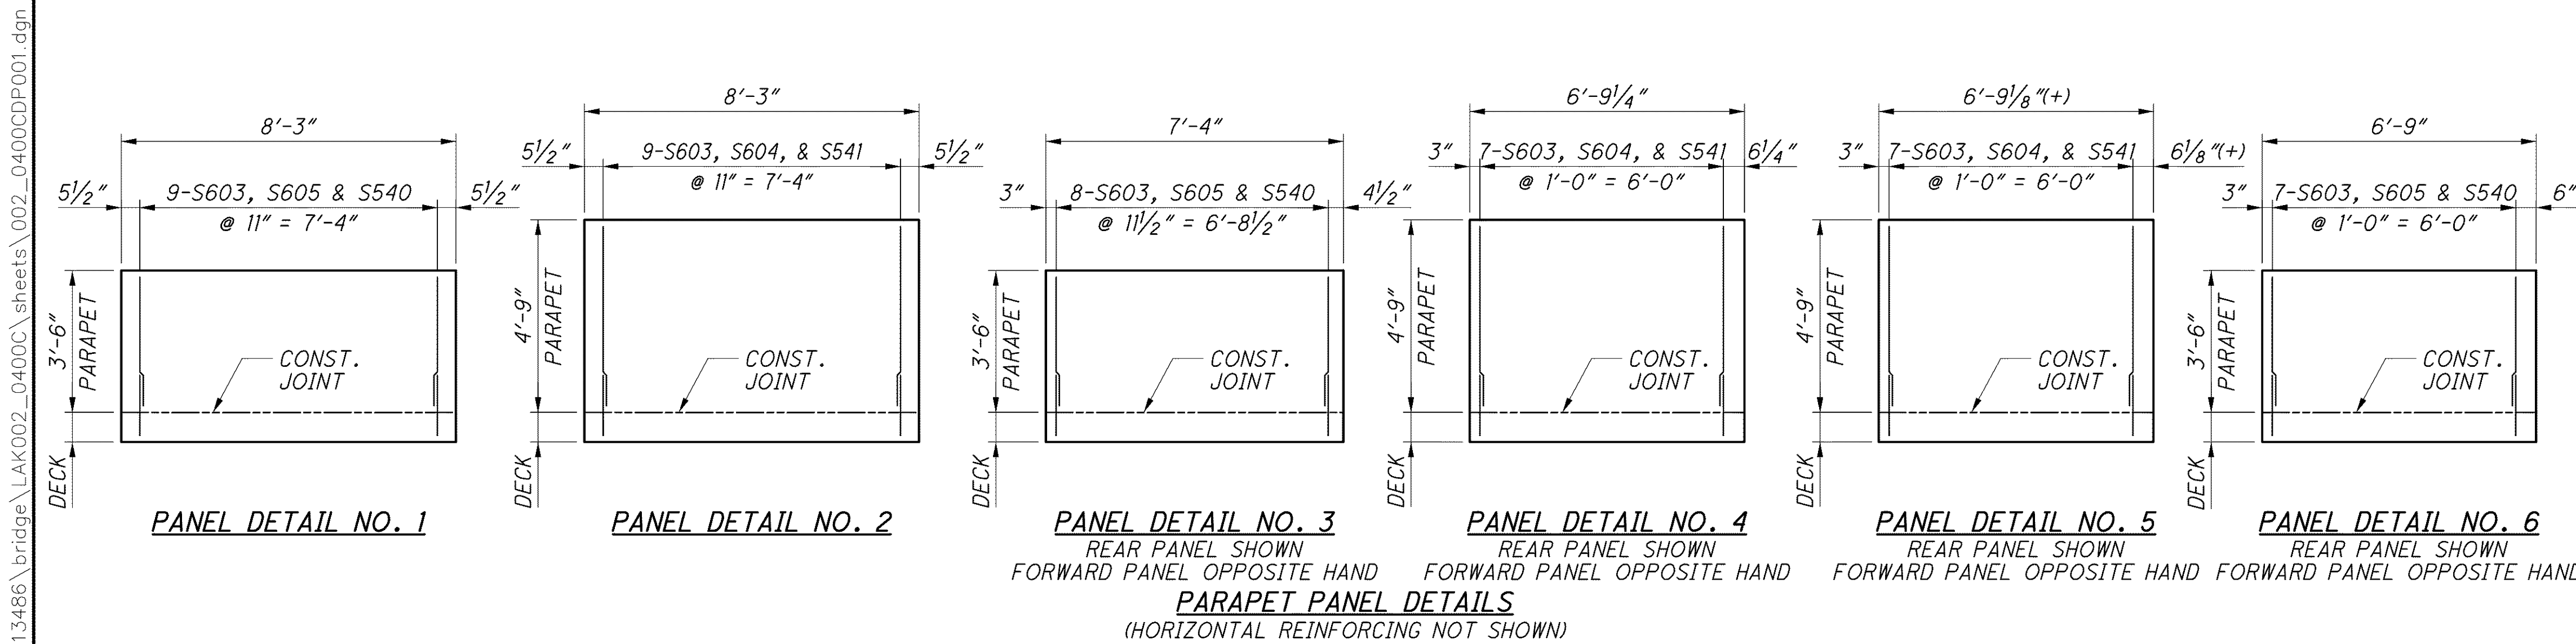

DESIGN AGENCY
PARSONS BRINCKERHOFF
 QUADE & DOUGLAS, INC.
 614 W. SUPERIOR AVE., SUITE 400
 CLEVELAND, OHIO 44113

DATE: 6-19-08
 DRAWN: NAL
 CHECKED: PWP
 DESIGNED: BMG
 REVIEWED: RJO
 REVISION: 4300572(L) 4300602(R)

BRIDGE NO. LAK-2-0400 L&R
 STATE ROUTE 2 OVER VINE STREET

LAK-2-3.32
 PID No. 13486

55/67
 1380
 1679