


LEGEND:

- * - 3-A601, S529 & PAIR S531 @ 8" = 1'-4"
- ** - BARS TO BE PLACED PARALLEL TO \bar{C} CONSTRUCTION
- *** - 4-A601, S529 & PAIR S531 @ 9" = 2'-3"
- **** - 3-A601, S529 & PAIR S531 @ 1'-0" = 2'-0"


PLAN

NOTES:

1. ABUTMENT DIAPHRAGM CONCRETE, STEEL SUPERSTRUCTURE, PHASED CONSTRUCTION: PLACE THE CONCRETE IN THE ABUTMENT DIAPHRAGM ENCASING STRUCTURAL STEEL MEMBERS OF AN INDIVIDUAL PHASE SEPARATELY OR WITH THE DECK CONCRETE OF THAT PHASE. IF THE DIAPHRAGM CONCRETE IS PLACED SEPARATELY, ALLOW AT LEAST 48 HOURS OF SET TIME BEFORE PLACING DECK CONCRETE. LOCATE THE HORIZONTAL CONSTRUCTION JOINT BETWEEN THE DIAPHRAGM AND DECK CONCRETE AT THE APPROACH SLAB SEAT.
2. FOR SECTION A-A AND ADDITIONAL NOTES SEE SHEET 41/70.
3. FOR LIST OF ABBREVIATIONS SEE SHEET 4/70.
4. MINIMUM BAR LAPS: # 5 BAR = 2'-5" FOR S801 MINIMUM BAR LAPS SEE SHEET 40/70.

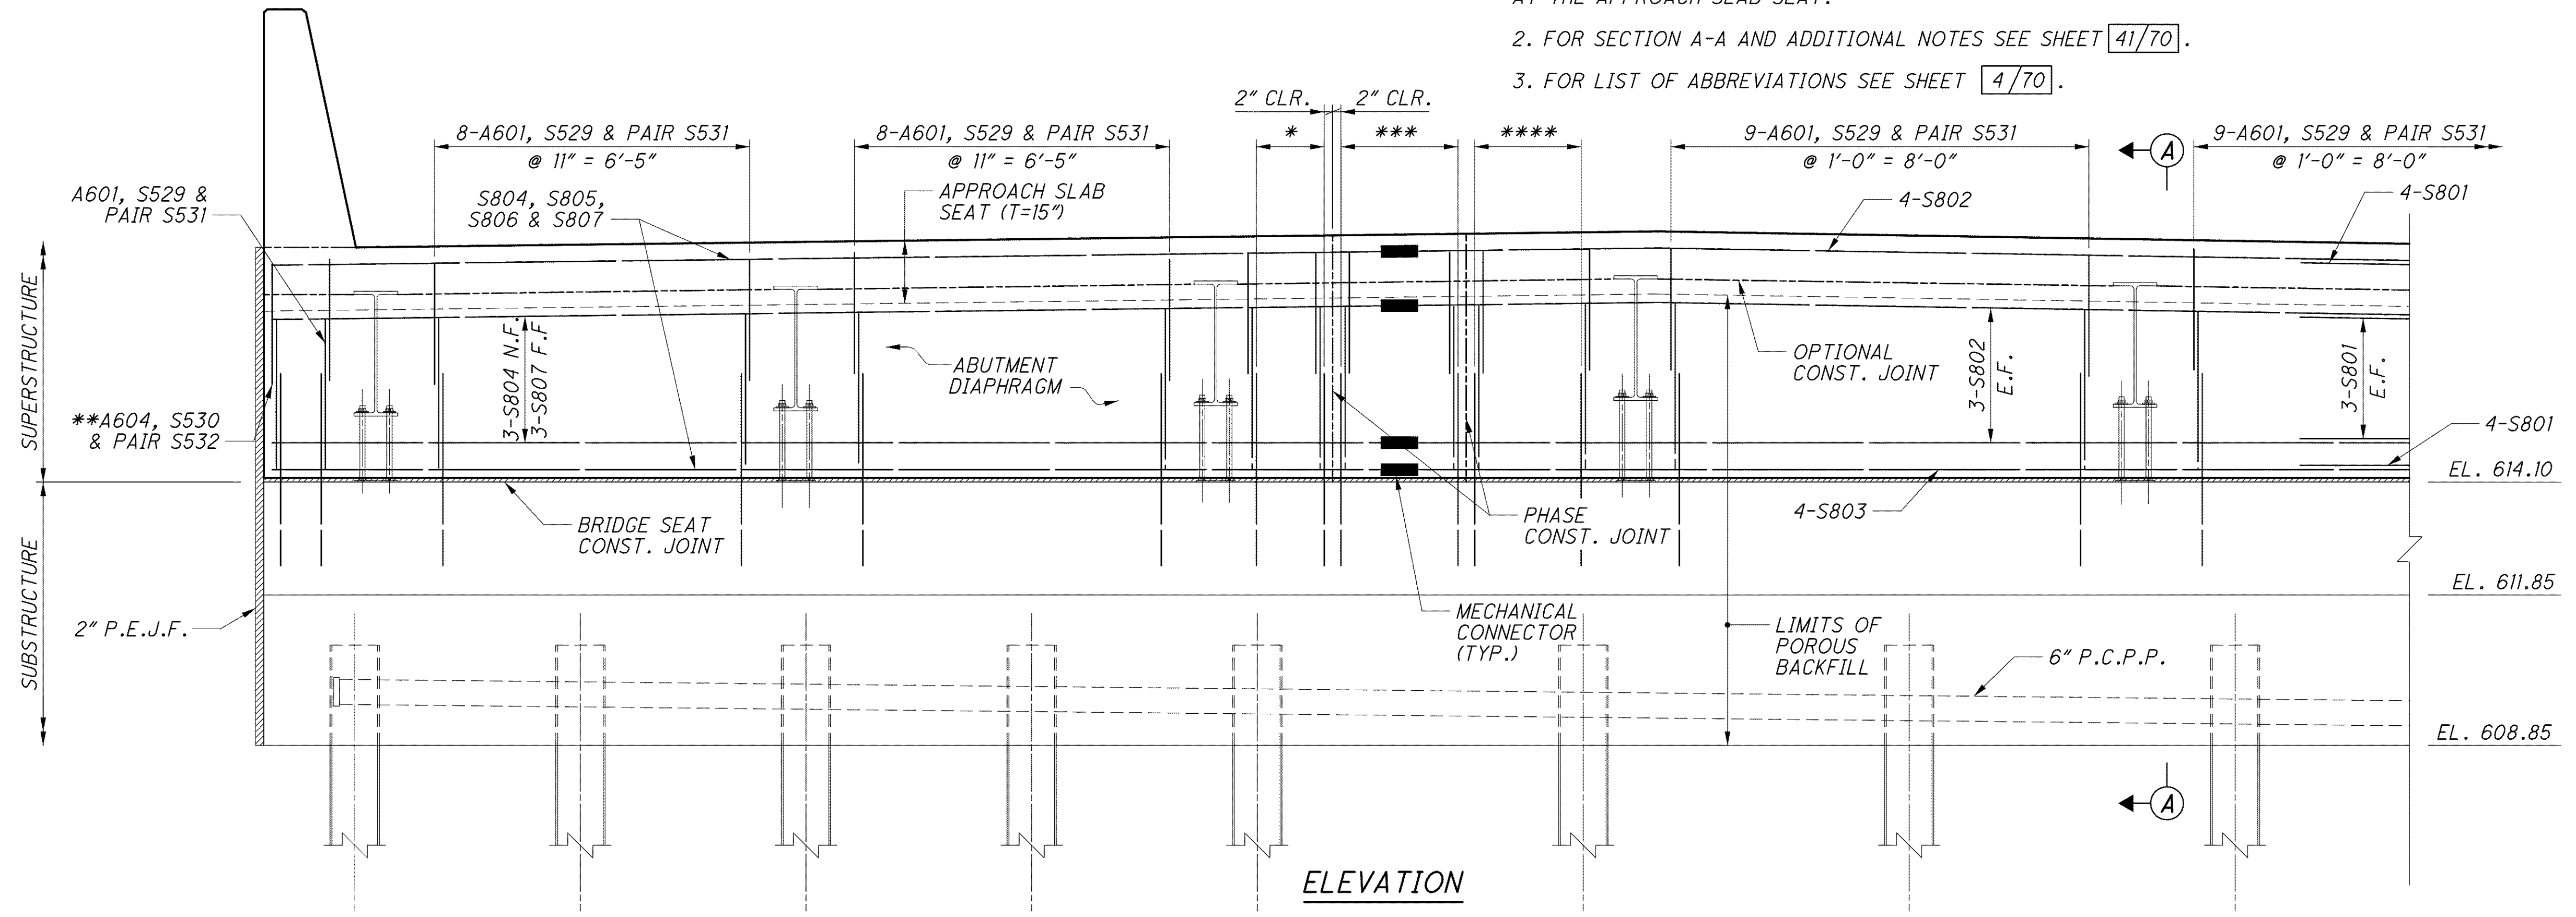

ELEVATION

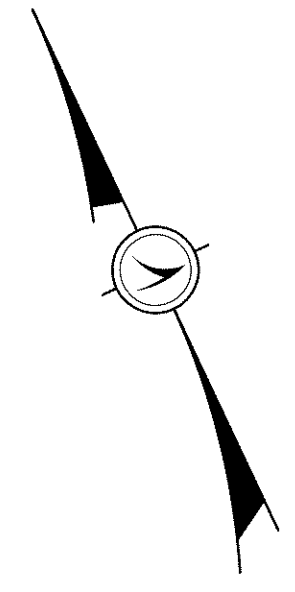

j:\LAK\13486\bridge\LAK002_0486c\sheets\002_0486CSD005.dgn 03-JUL-2008 1:44PM linfn

| | | | |
|----------|---------|-----------------------|-------------------------|
| DESIGNED | P.J.L. | CHECKED | EBS |
| DRAWN | L.E.L. | REVISED | |
| REVIEWED | R.J.O. | STRUCTURE FILE NUMBER | 4300686 (L) 4300726 (R) |
| DATE | 6-19-08 | | |