

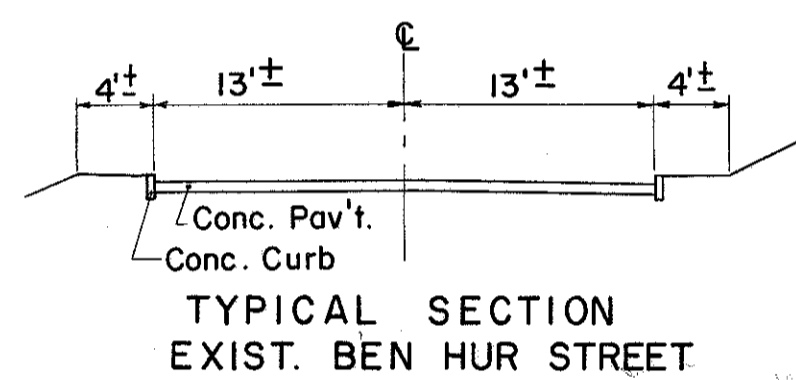


CONSTR.  $\odot$   
RELOC. S. R. 2  
CURVE DATA  
P.I. Sta. 134 + 29.14  
 $\Delta = 8^{\circ}07'10''$  Rt.  
 $D = 0^{\circ}28'00''$   
 $R = 12,277.66'$   
 $L = 1,739.88'$   
 $T = 871.39'$

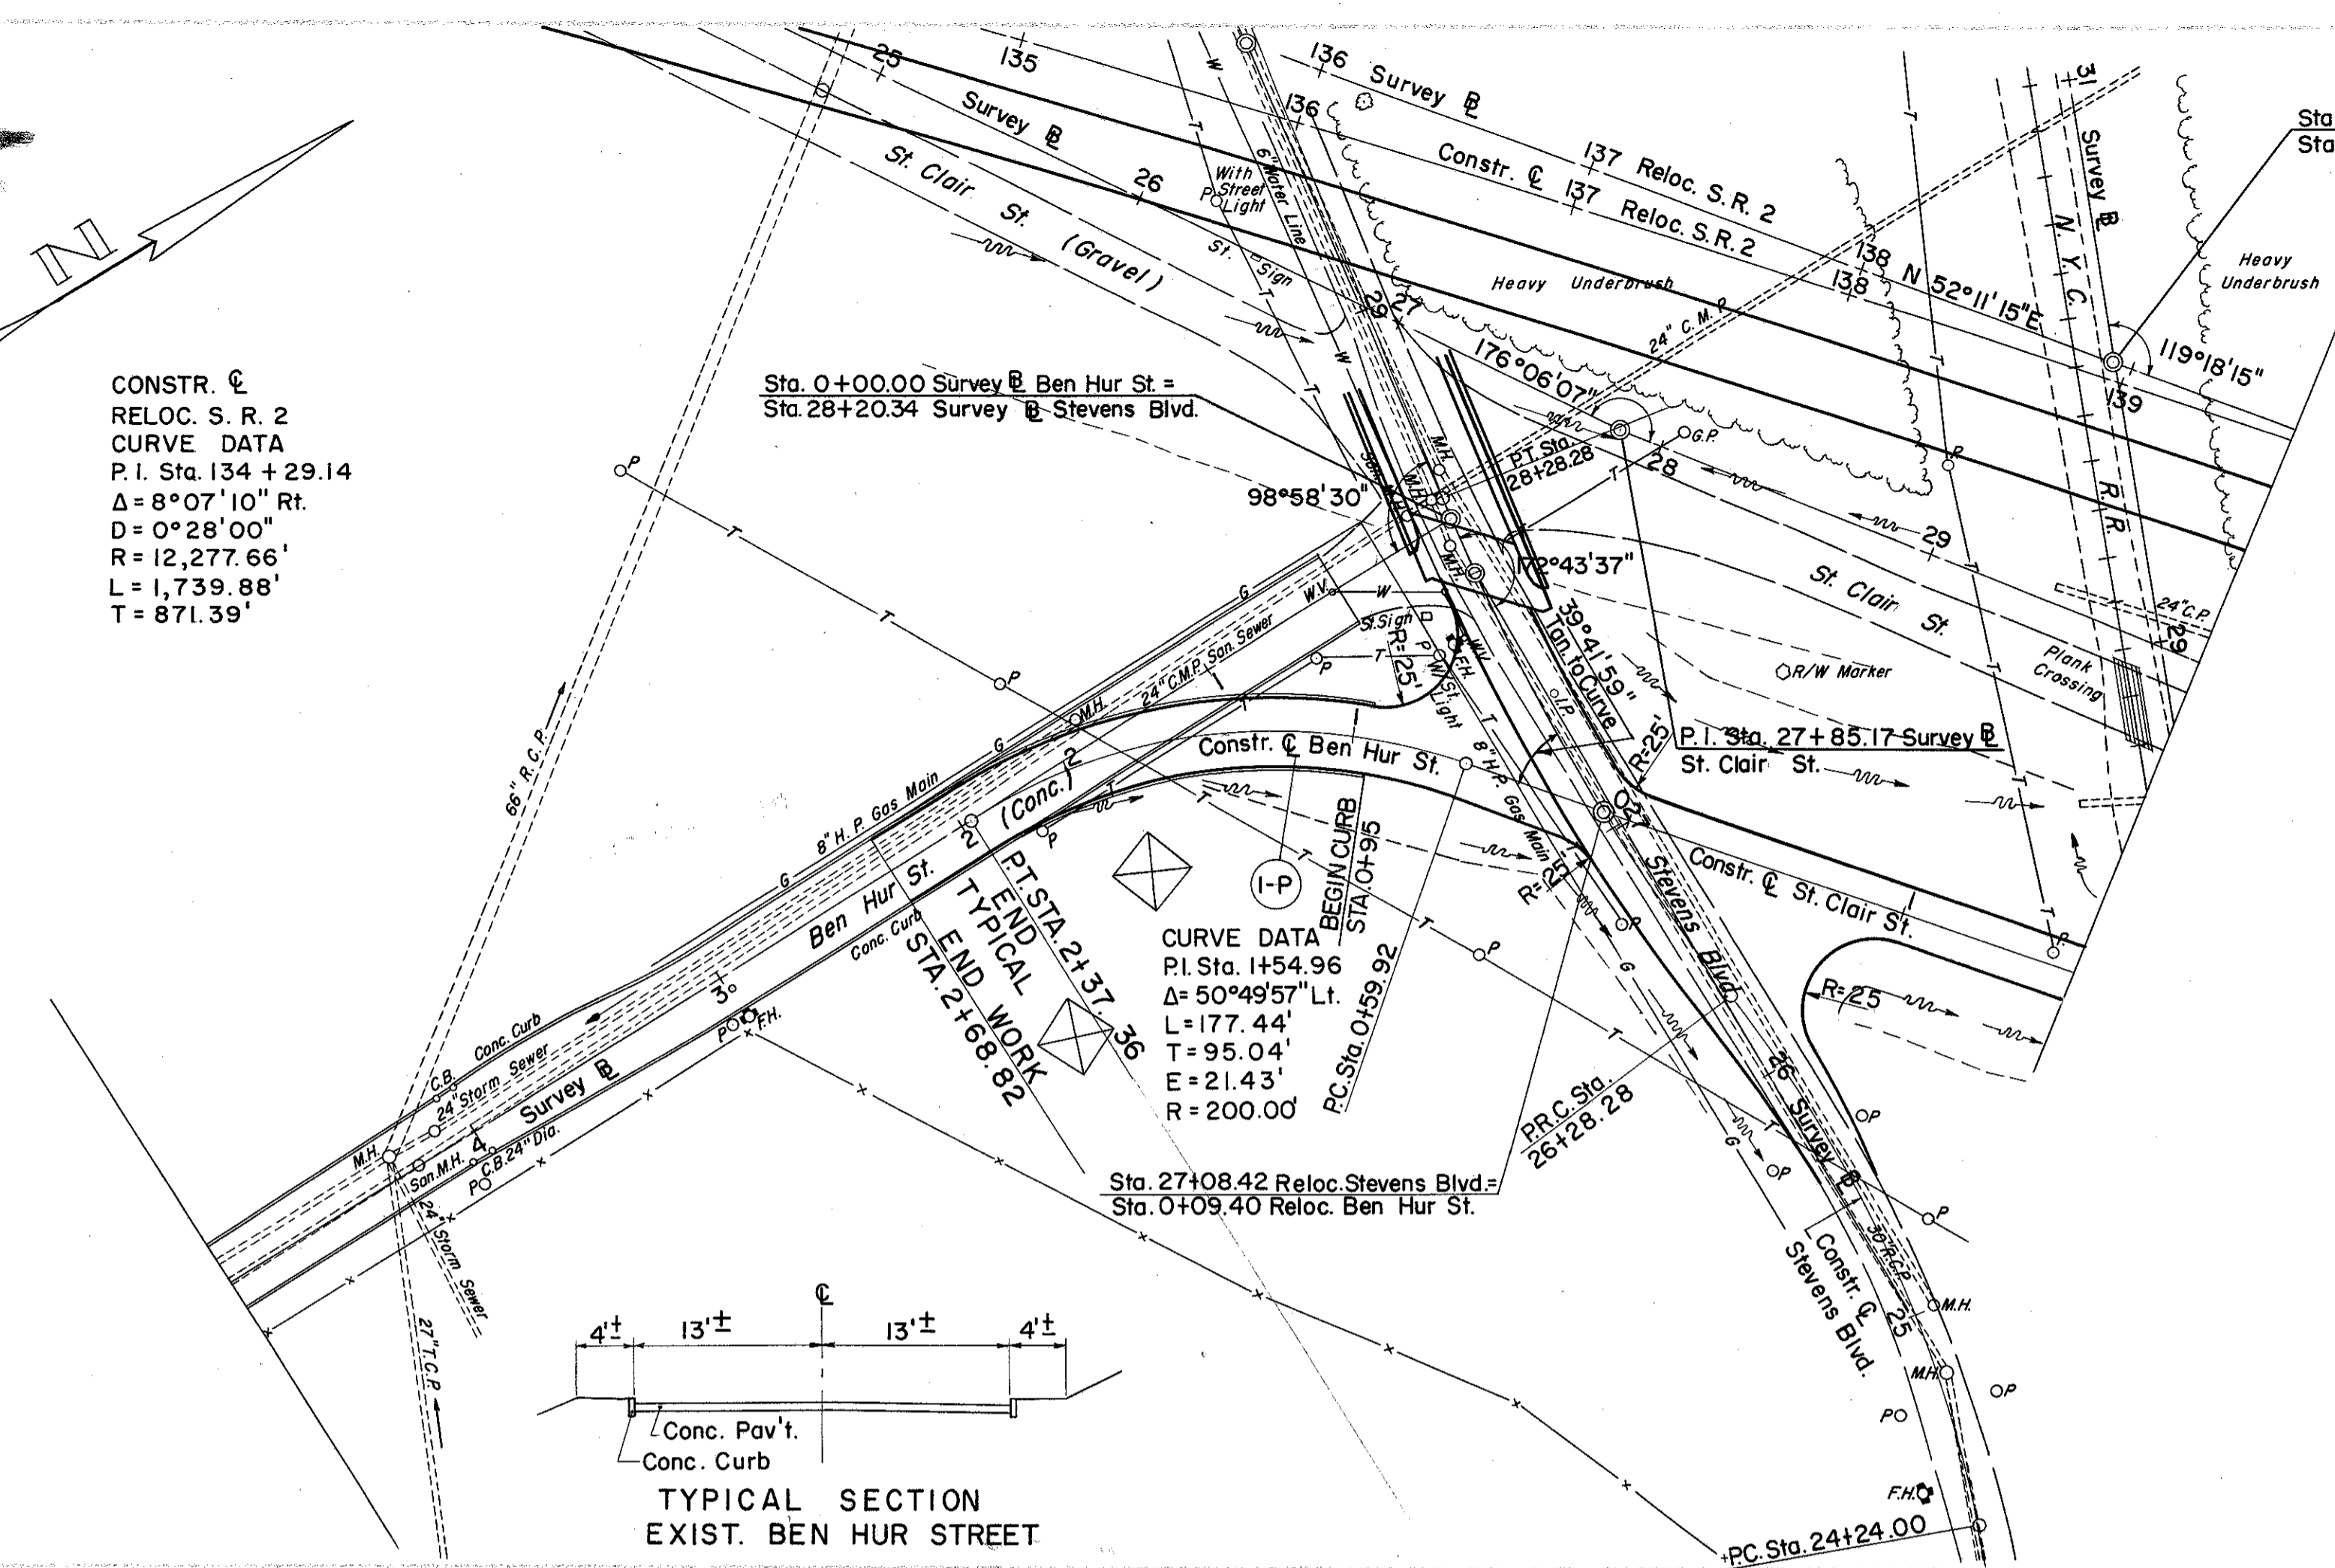

CURVE DATA  
P.I. Sta. 1154.96  
 $\Delta = 50^{\circ}49'57''$  Lt.  
 $L = 177.44'$   
 $T = 95.04'$   
 $E = 21.43'$   
 $R = 200.00'$

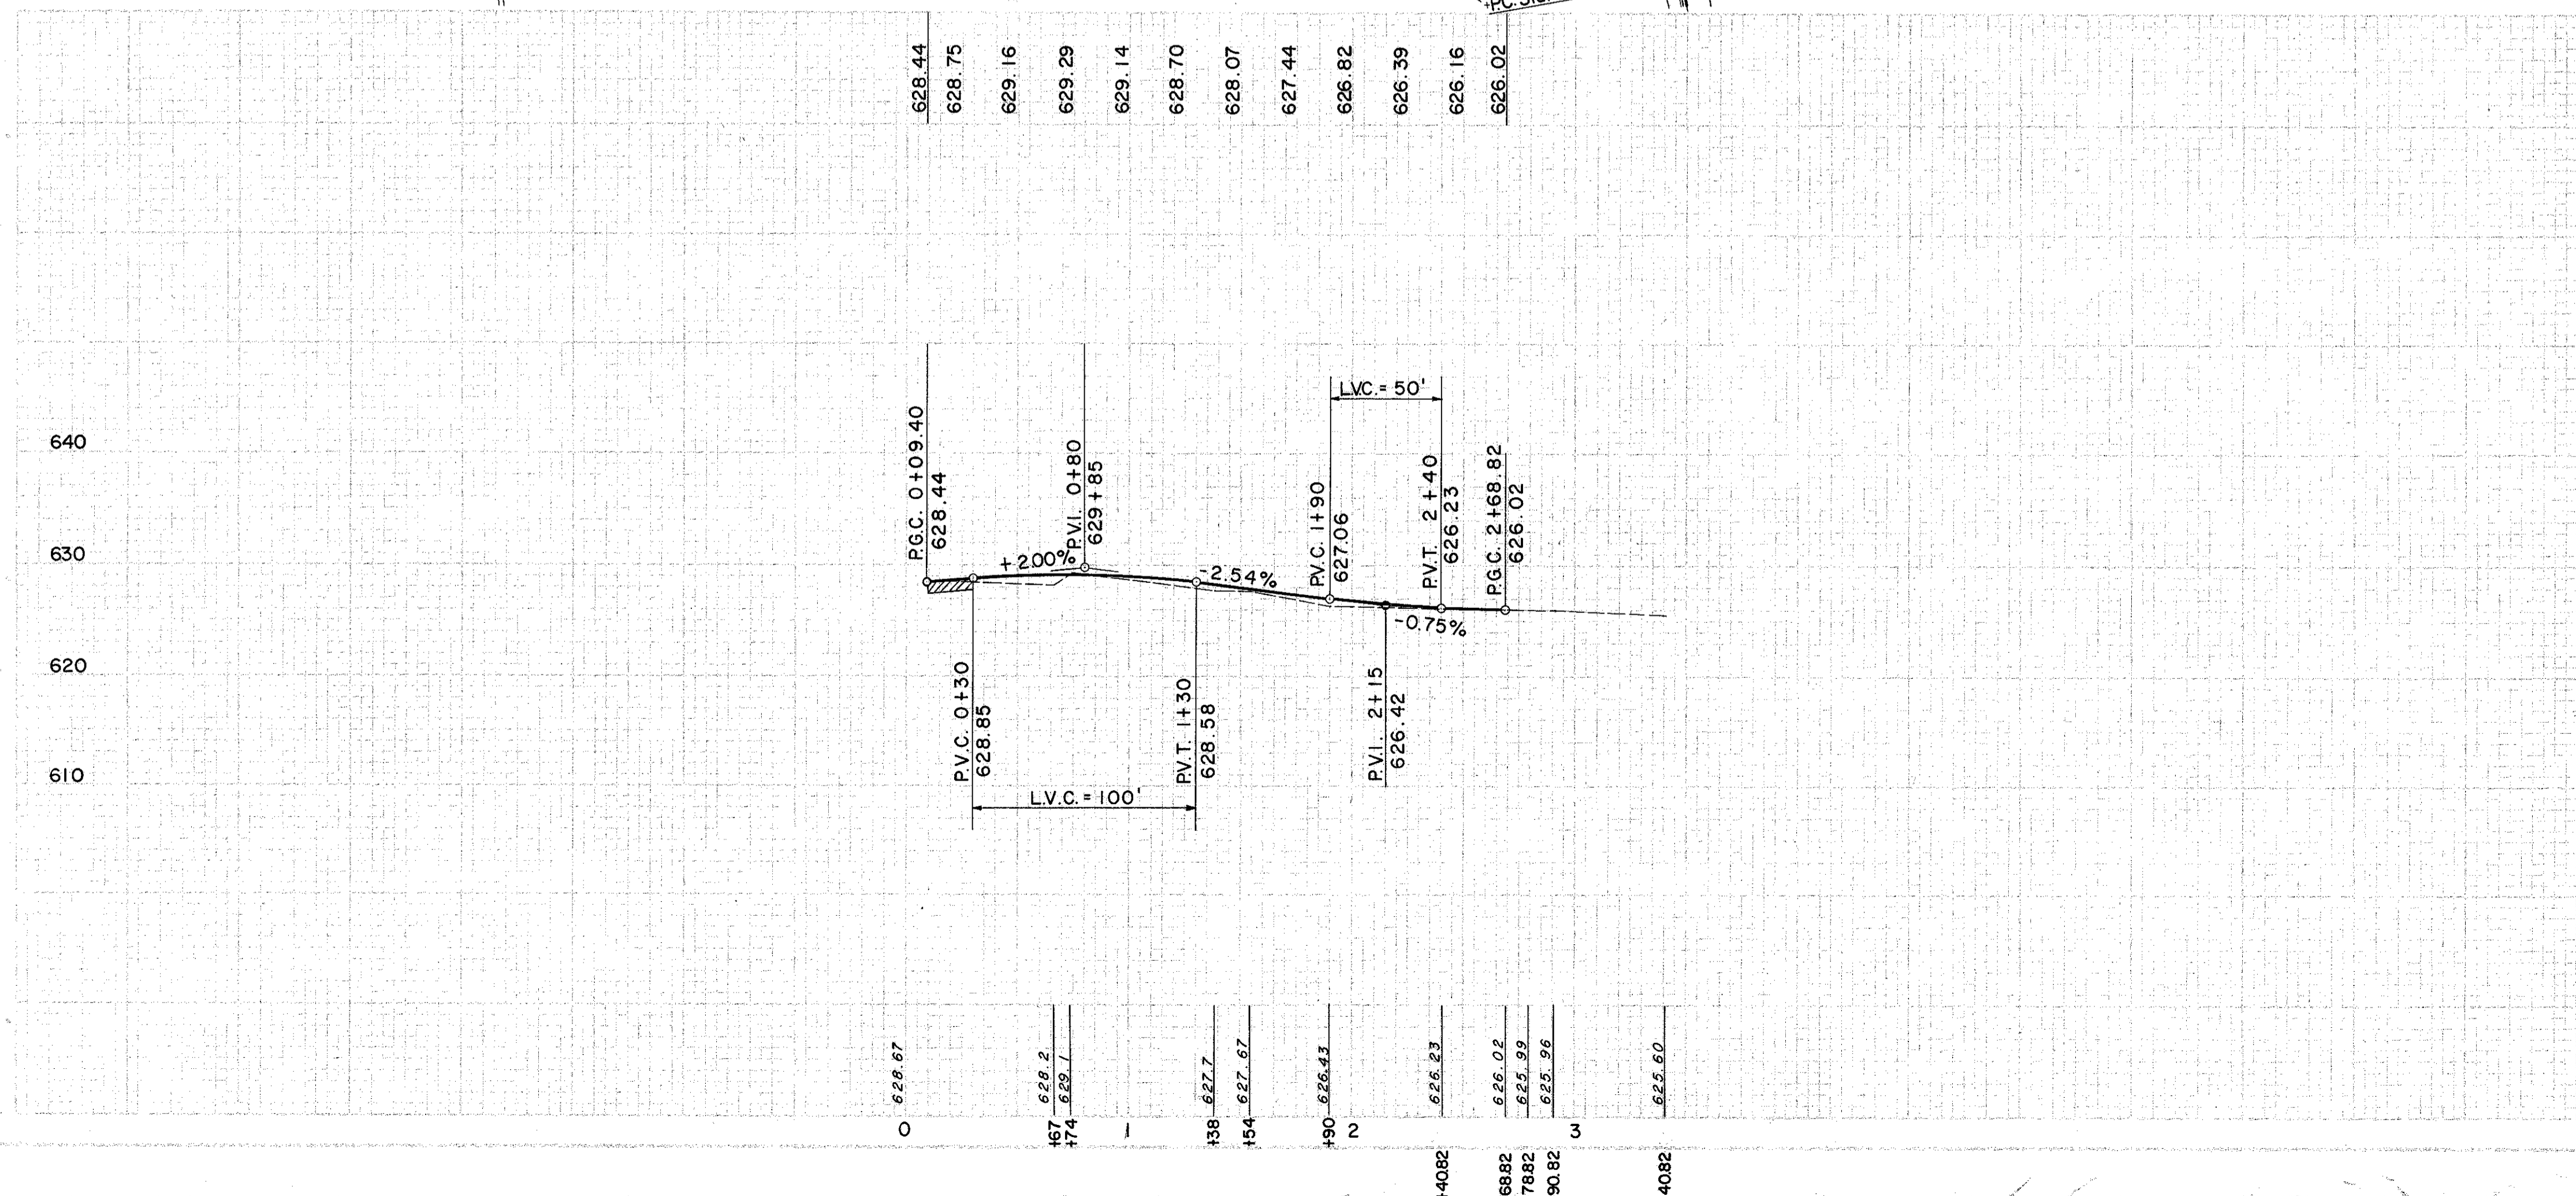

(P) PAVEMENT

REF. STATION NO.	FROM	TO	#46 AGGR. FOR RD. MIX. C.Y.	BIT. MATL. FOR RD. SEAL. GAL.	#6 AGGR. FOR SEAL. C.Y.	BIT. MATL. FOR SEAL. GAL.	T-30 PRIME COAT GAL.	B-19 CRUSHED AGGR. BASE COURSE C.Y.	I-22 SUB-BASE C.Y.	E-1 COMPACT SUB-GRADE C.Y.	I-9 STONE UNDERDRAIN L.F.	I-12 CONC. CURB TYPE 6 L.F.	E-8 REMOVAL CONC. PAVT. S.Y.
I-P	0+271	2+68.82	39	631	2.80	175	245	99	80	7.40	16	348	3.81

EXCAVATION	= 124 C.Y.
EMBANKMENT	= 41 C.Y.
EMBANKMENT 20"	= 49 C.Y.