

TYPICAL SECTIONS


TYPE T-71

SCALE: 1" = 8'-0"

RECONSTRUCTION OF S.R. 615


FED. RD. DIVISION	STATE	PROJECT	
2	OHIO	F-329 (16)	

LAKE COUNTY
LAK-2-739

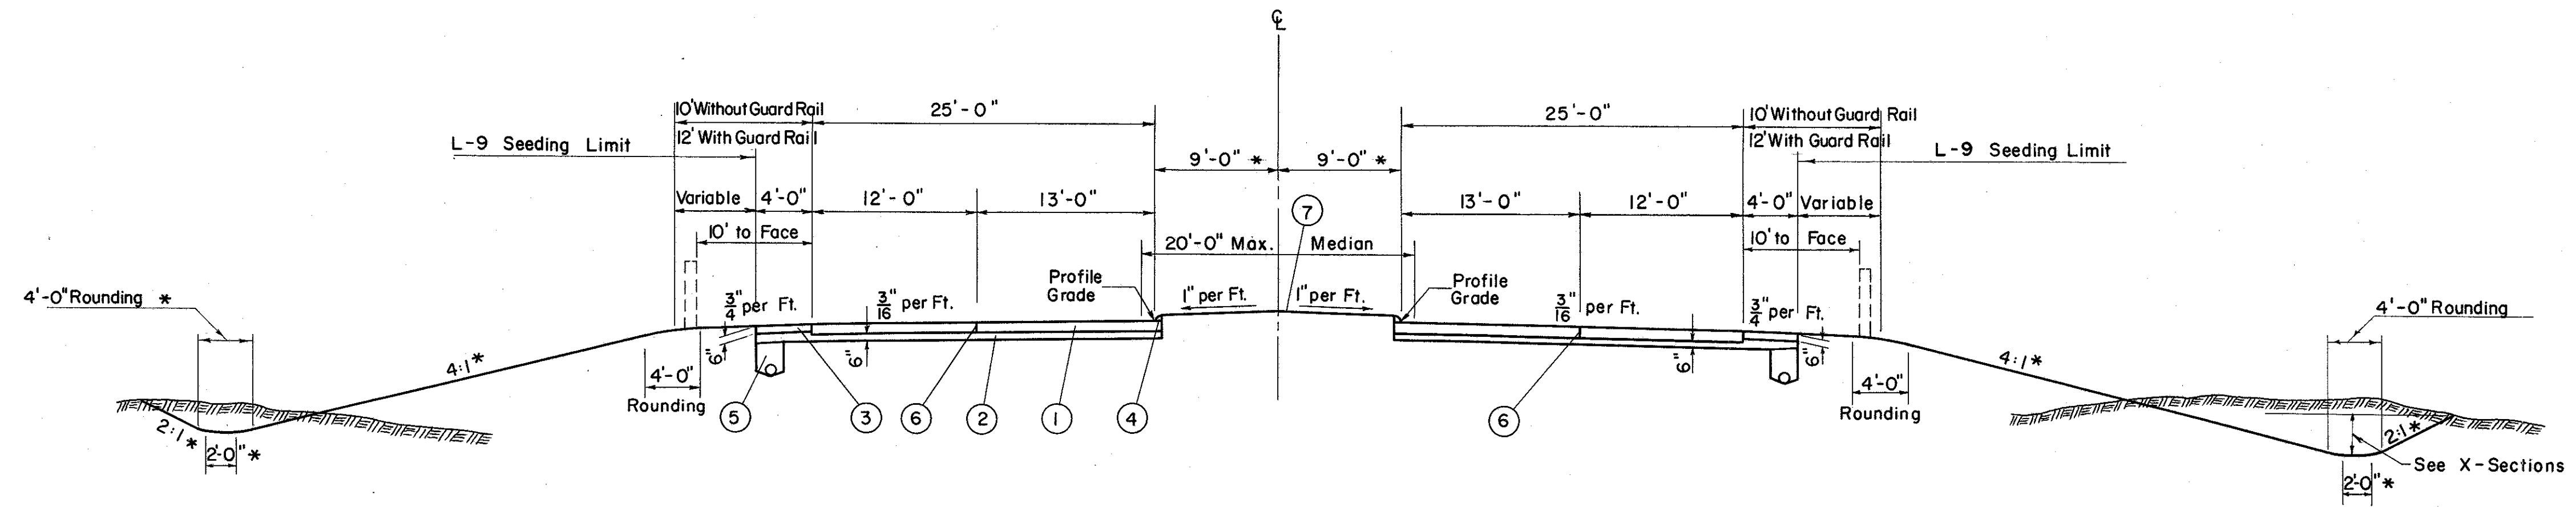

NORMAL SECTION - A

LIMITING STATIONS
STA. 27 + 00 TO STA. 36 + 75

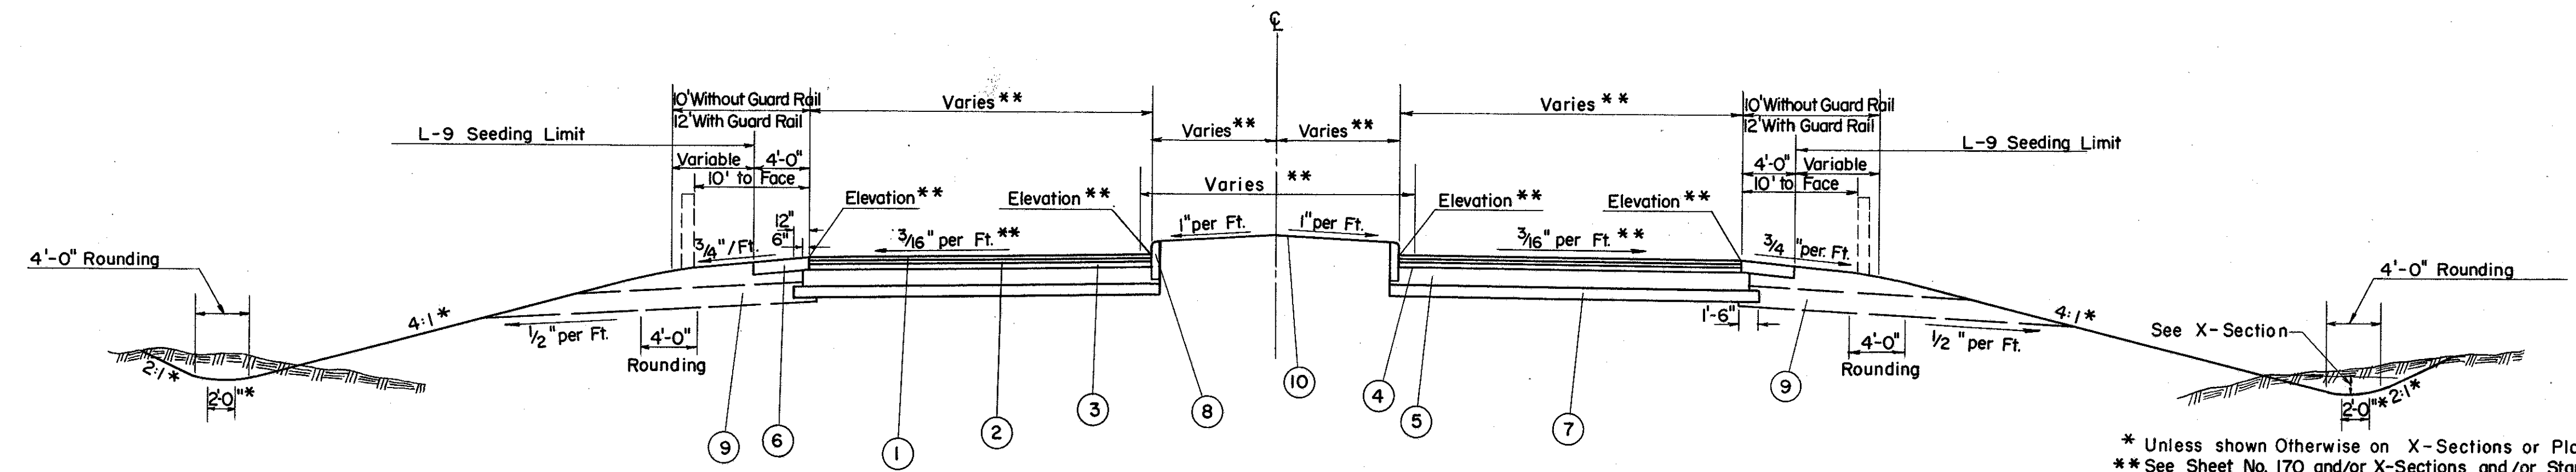

NORMAL SECTION - B

LIMITING STATIONS
STA. 19 + 40 TO STA. 27 + 00
STA. 36 + 75 TO STA. 45 + 65

LEGEND - A

- ① T-71 9" Reinforced Portland Cement Concrete Pavement
- ② I-22 6" Subbase; grading A or B see note.
- ③ I-18 Stabilized Crushed Aggregate Shoulder 6"
- ④ I-12 Concrete Curb Type 2A
- ⑤ I-4 Pipe Underdrain 6"
- ⑥ Standard Longitudinal Joint
- ⑦ L-9 Seeding & Protecting

LEGEND - B

- ① T-35 1/2" Asphaltic Concrete Surface Course, Type A (70-80)
- ② B-35 1/2" Asphaltic Concrete Leveling Course (70-80)
- ③ B-35 2 3/4" Asphaltic Concrete Base Course (70-80)
- ④ T-30 Bituminous Prime Coat
- ⑤ B-119 8" Crushed Aggregate Base Course
- ⑥ I-18 6" Stabilized Crushed Aggregate Shoulder
- ⑦ I-22 5" Subbase
- ⑧ I-12 Concrete Curb, Type 6
- ⑨ I-9 Stone Underdrain (No. 2) Staggered at 50' Intervals or as Directed by the Engineer
- ⑩ L-9 Seeding & Protecting

* Unless shown Otherwise on X-Sections or Plans
** See Sheet No. 170 and/or X-Sections and/or Standard Construction Drawing I-21-23