


FOUNDATION SOUNDINGS
 Foundation design and foundation quantities are based on a study of rock soundings and soil sampling sounding made at the site. This sounding information may be inspected in the office of the Bureau of Bridges in Columbus, or in the Division office. But the state assumes no responsibility for the accuracy thereof.

PROPOSED STRUCTURE
 Type: Continuous R.C. Slab with capped Pile Substructure
 Spans: 14'-0" 17'-6" 14'-0"
 Rdwy: 30'-0" 1/1' of guardrails
 Ld. Freq. CF=130
 Skew: 30° R.F.
 Wearing Surface: 3" monolithic
 Appra. Slabs: 25'-0" Long
 Alignment: Tangent

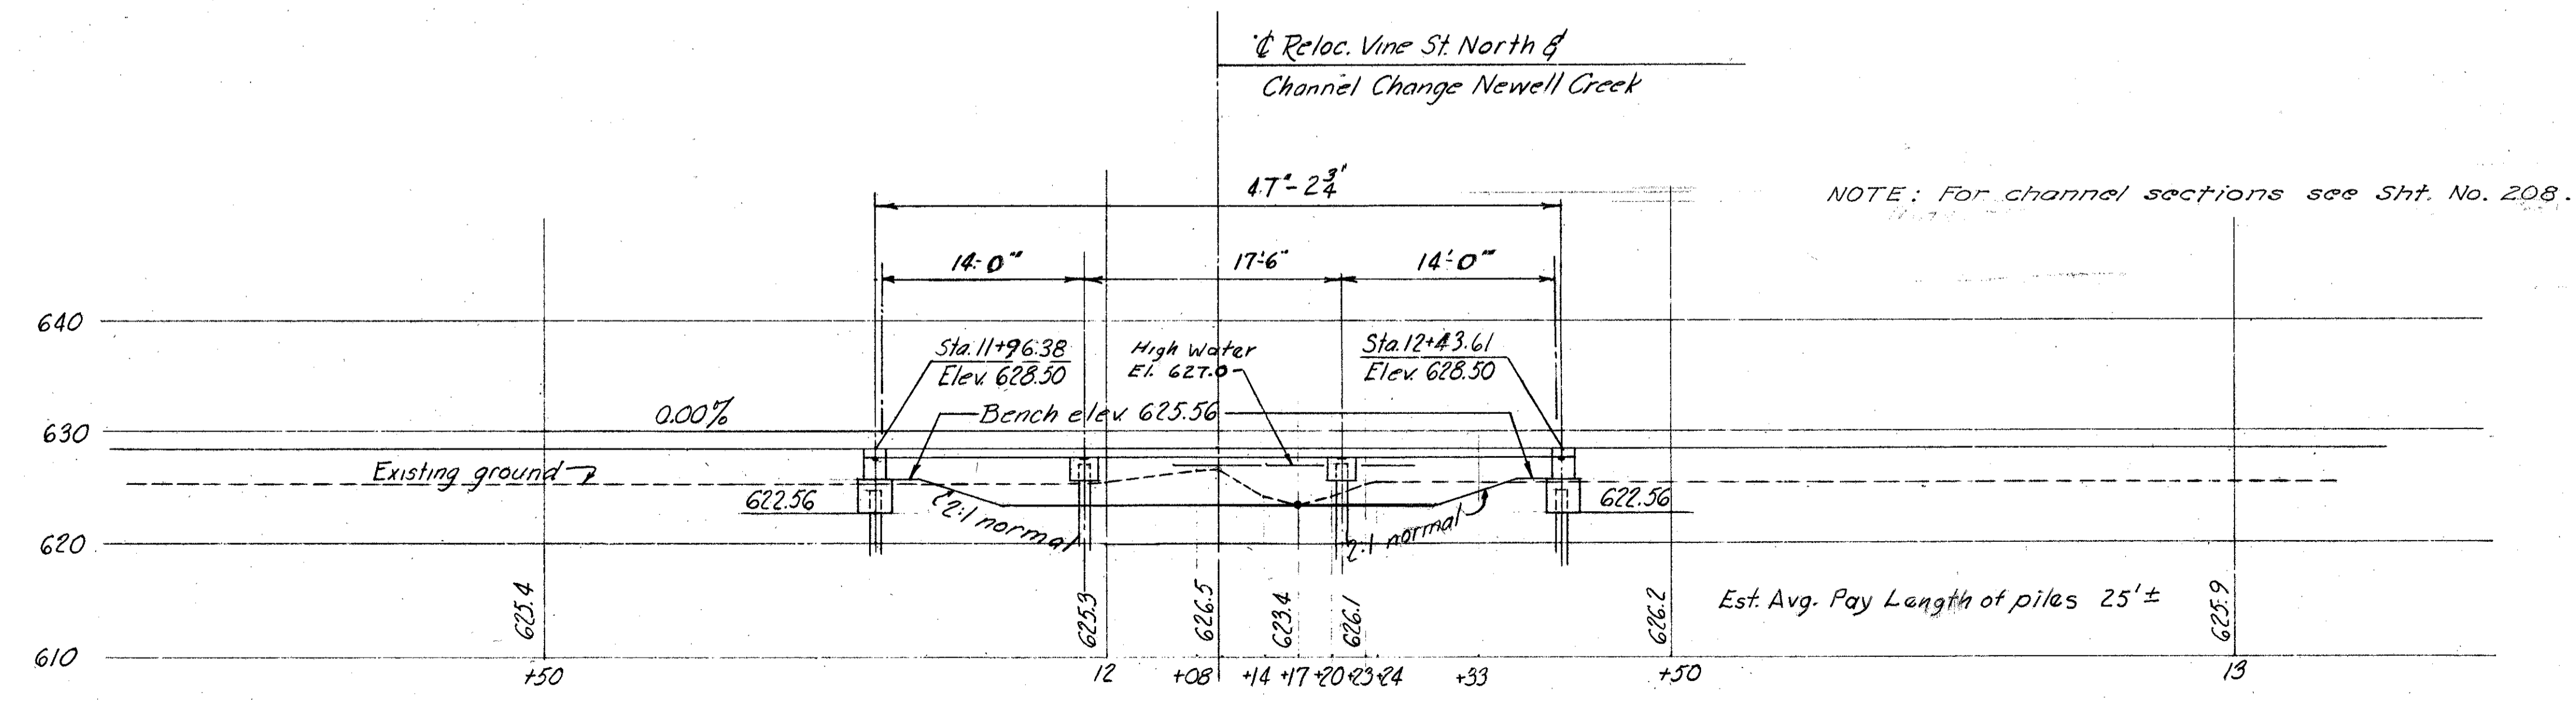

NOTE: For channel sections see Sht. No. 208.

PREPARED BY CAPITOL ENGINEERING ASSOCIATES, DILLSBURG, PA. FOR						
STATE OF OHIO DEPARTMENT OF HIGHWAYS DIVISION OF DESIGN AND CONSTRUCTION BUREAU OF BRIDGES						
SITE PLAN						
RELOC. VINE STREET NORTH LAKE COUNTY STA. 12+20.00						
DESIGNED	DRAWN	TRACED	CHECKED	REVISED	DATE	REVISED
					10-3-58	