


# TYPICAL SECTIONS

TYPE 404

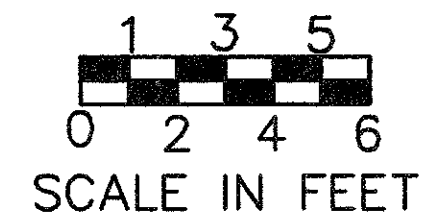


CALC BY	
DATE	
CHKD BY	
DATE	

LAKE COUNTY  
LAK-20-15.75

OHIO  
FHWA REGION 5

6  
80

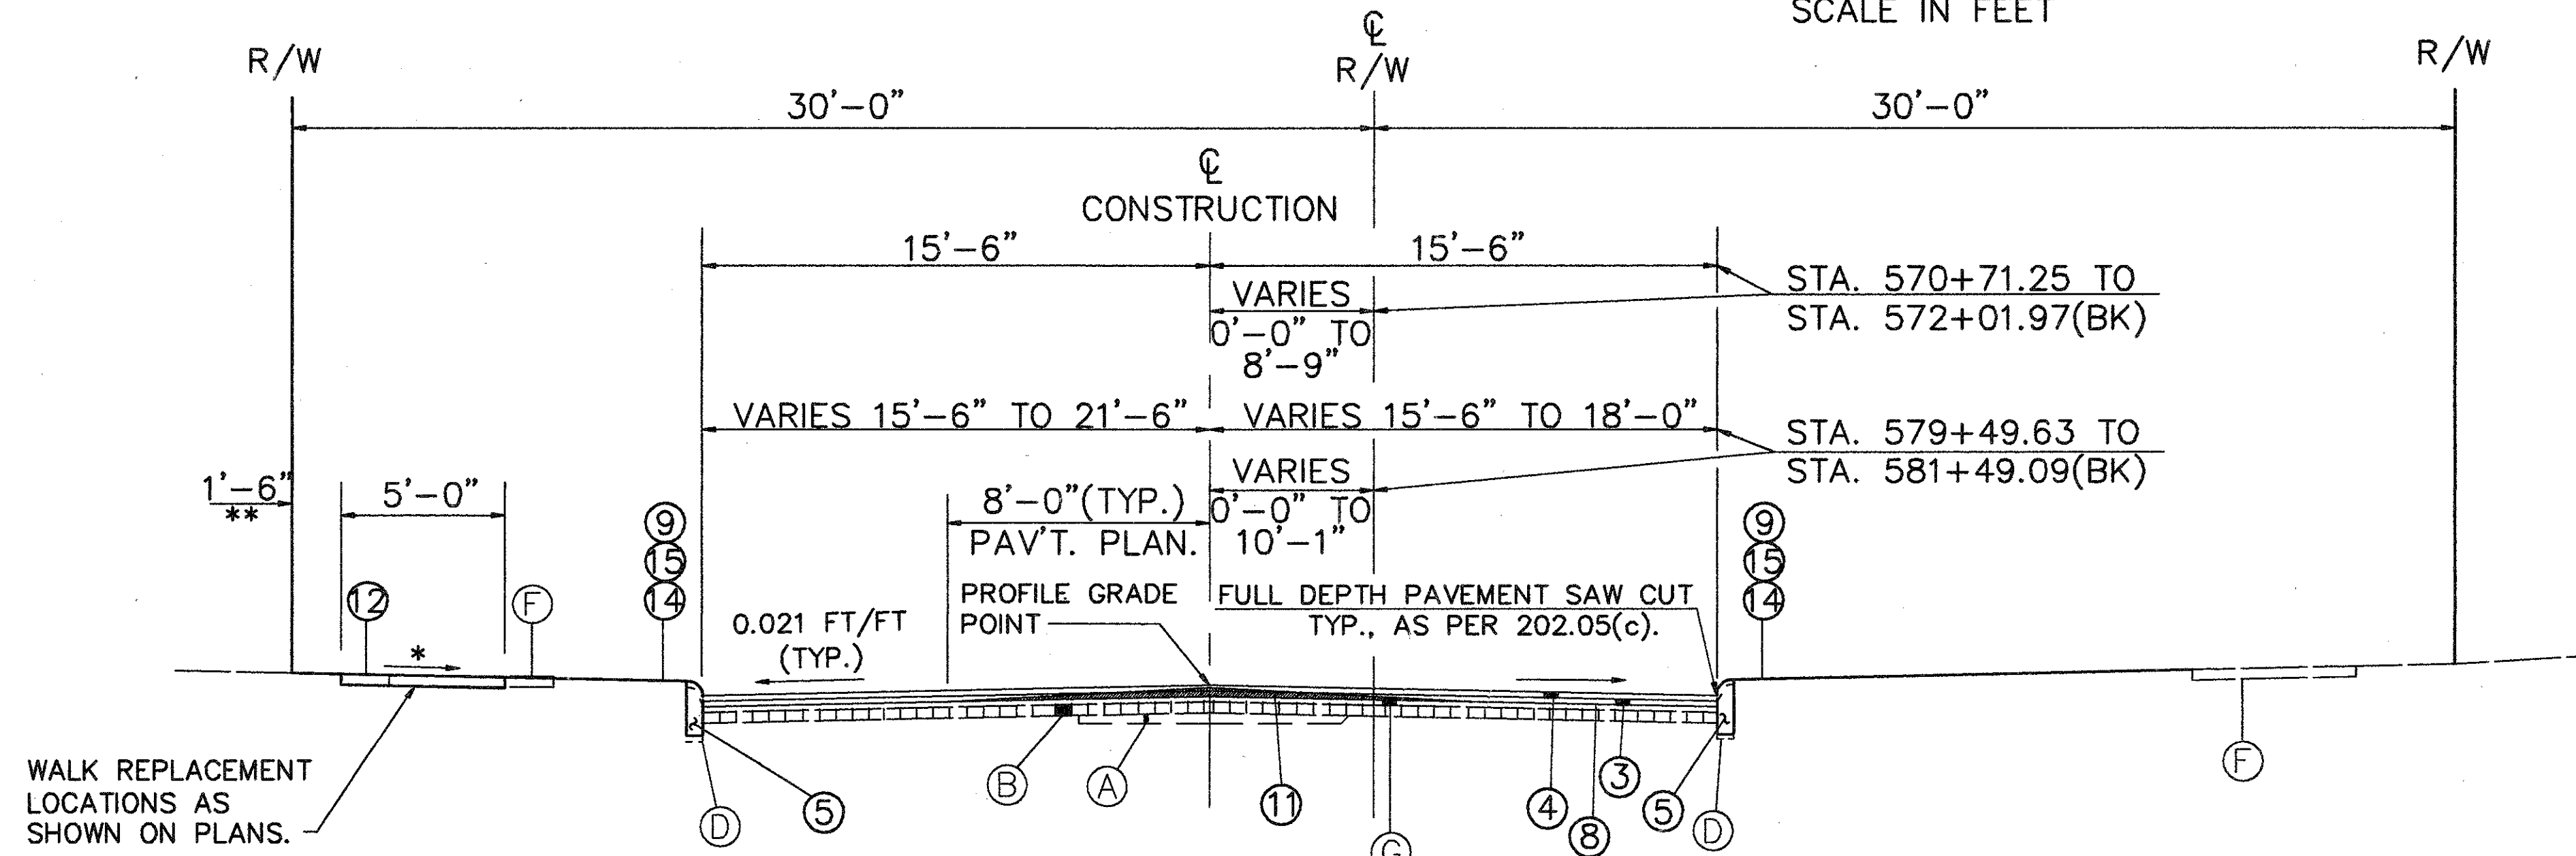


ERIE ST.  
 STA. 570+71.25 TO STA. 572+01.97(BK) = 130.72 LIN. FT.  
 STA. 579+49.63 TO STA. 581+49.09(BK) = 199.46 LIN. FT.  
 TOTAL = 330.18 LIN. FT.

\* 1/4" / FT. MIN. (TYP.)  
 \*\* UNLESS SHOWN OTHERWISE ON PLANS.

## LEGEND

- (A) EXISTING GRANULATED SLAG
- (B) EXISTING 4" BRICK
- (D) EXISTING CURB
- (F) EXISTING WALK
- (G) EXISTING ASPHALT (2 1/2" TO 5" DEPTH)
- (3) ITEM 403 - VARIABLE DEPTH (1/2" MIN.) ASPHALT CONCRETE, AC-20
- (4) ITEM 404 - 1 1/2" ASPHALT CONCRETE, AC-20
- (5) ITEM 609 - CURB, TYPE 6 (SEE DETAIL, SHEET 20)
- (6) ITEM 605 - 6" SHALLOW PIPE UNDERDRAIN WITH FABRIC WRAP
- (8) ITEM 407 - TACK COAT
- (9) ITEM 660 - SODDING
- (11) ITEM 254 - PAVEMENT PLANING, BITUMINOUS (VARIES 0" TO 1 1/2" AS DIRECTED BY THE ENGINEER)
- (12) ITEM 608 - 4" CONCRETE WALK
- (14) ITEM 203 - LINEAR GRADING, METHOD B (5' TYPICAL)
- (15) ITEM 653 - 2" TOPSOIL FURNISHED AND PLACED, AS PER PLAN

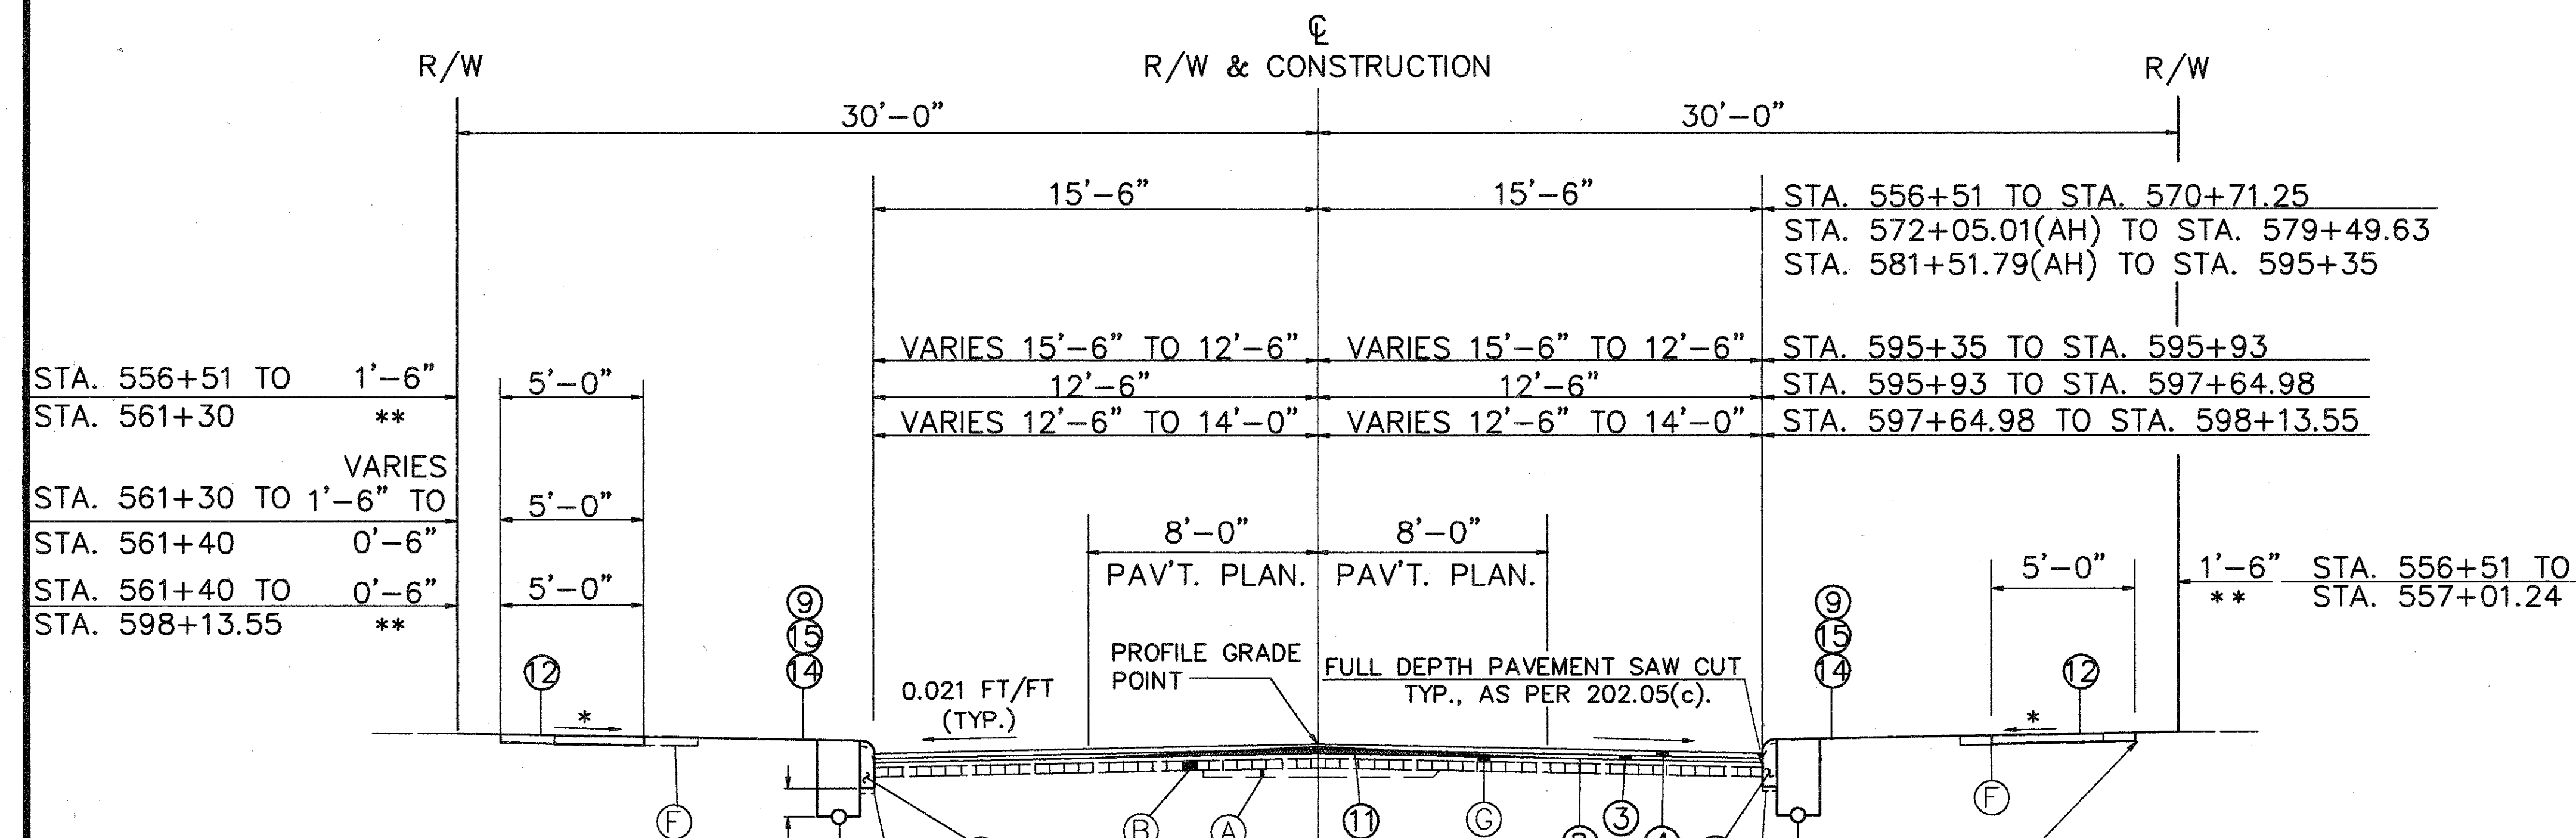

ERIE ST.  
 STA. 556+51 TO STA. 570+71.25 = 1420.25 LIN. FT.  
 STA. 572+05.01(AH) TO STA. 579+49.63 = 744.62 LIN. FT.  
 STA. 581+51.79(AH) TO STA. 598+13.55 = 1661.76 LIN. FT.  
 TOTAL = 3826.63 LIN. FT.

\* 1/4" / FT. MIN. (TYP.)  
 \*\* UNLESS SHOWN OTHERWISE ON PLANS.  
 \*\*\* ITEM 605 - 6" SHALLOW PIPE UNDERDRAIN WITH FABRIC WRAP TO BE INSTALLED FROM STATION 556+51, RIGHT AND LEFT TO STATIONS 556+78, RIGHT AND 556+86, LEFT.

NOTE:  
 1. EXISTING ACCESS WALKS TO ABUTTING PROPERTIES SHALL BE MAINTAINED BY THE CONTRACTOR.