





 WEARING COURSE REMOVED

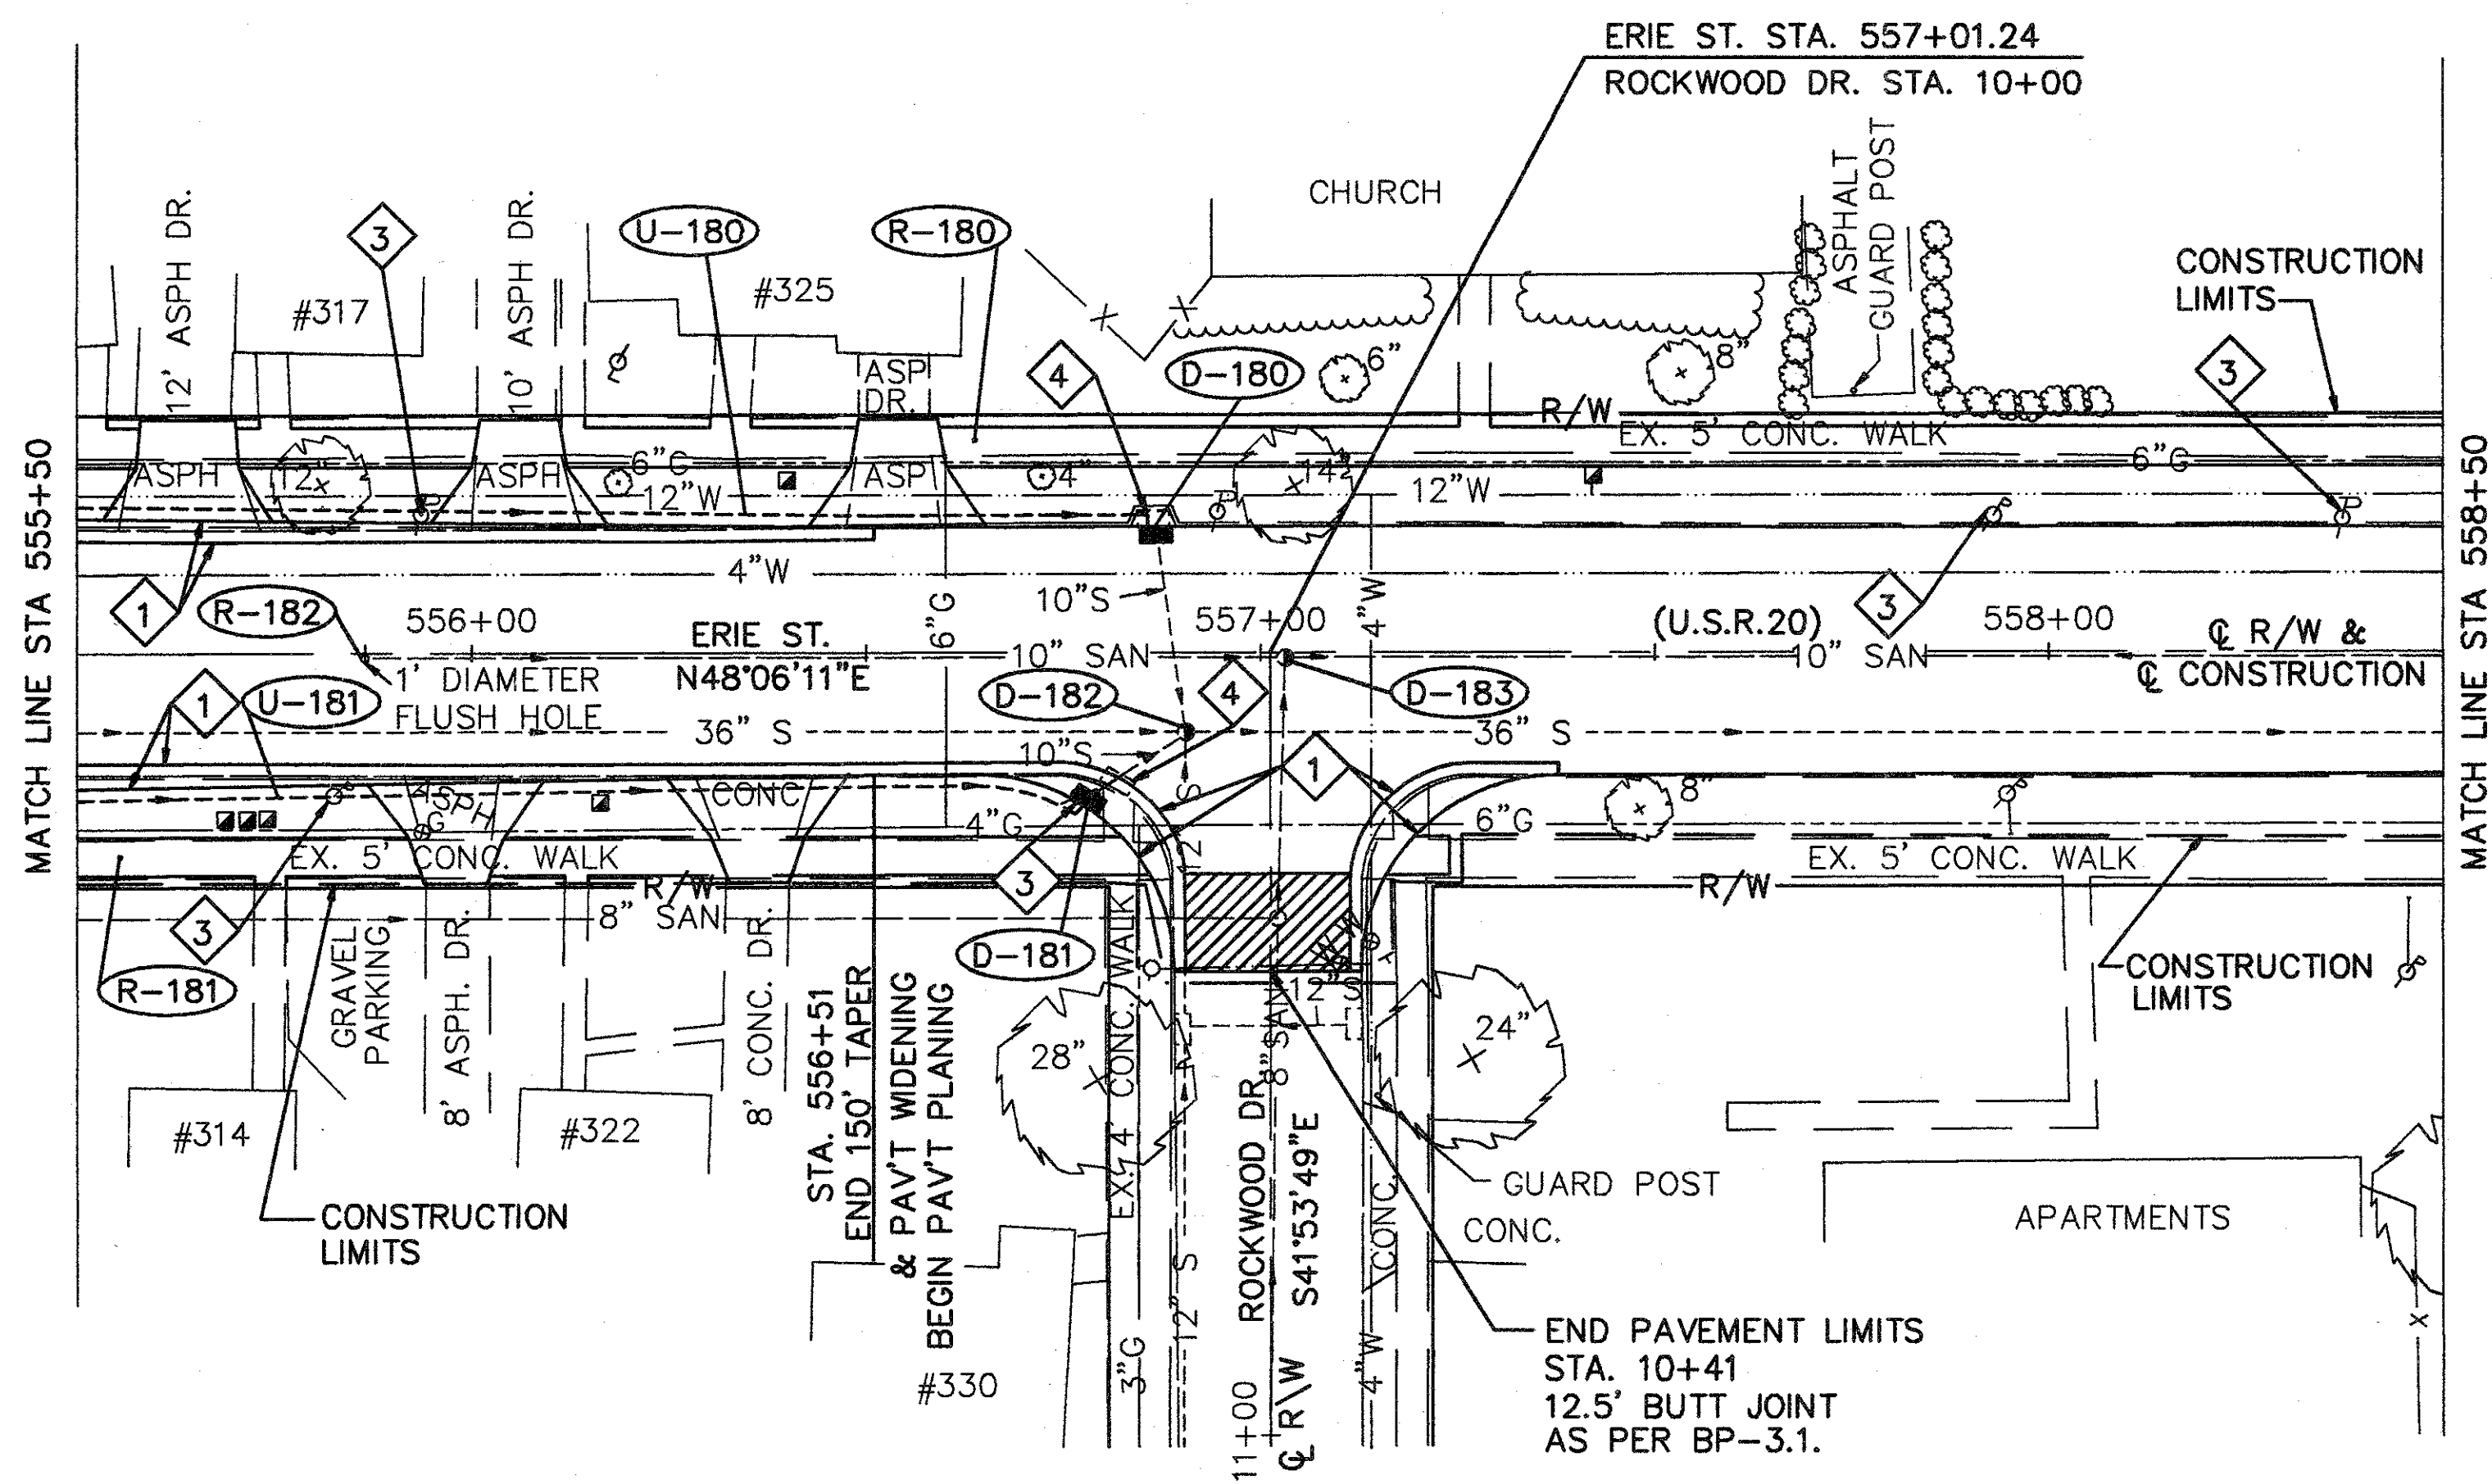


CURB RAMP SCHEDULE

STATION	TYPE
556+84, RT.	2
557+18, RT.	2

-  PAVEMENT WIDENING LIMITS
-  TO BE RELOCATED BY OTHERS
-  EXISTING CATCH BASIN OR MANHOLE & APPURTENANCES TO BE REMOVED. COST TO BE INCLUDED IN THE UNIT PRICE FOR THE APPROPRIATE ITEM 604 CATCH BASIN OR MANHOLE ITEM.

ROADWAY				202	SPEC.	608	608	608
REF.	FROM	TO	SIDE	WALK REMOVED SQ. FT.	ABANDON MISCELLANEOUS: FLUSH HOLE EACH	4" CONCRETE WALK SQ. FT.	CURB RAMP, TYPE 2 EACH	CURB RAMP, TYPE 2 SQ. FT.
R-180	555+50	558+50	LT.	1360		1358		
R-181	555+50	557+25	RT.	626		587	1	40
R-182	555+87		1'RT		1			
TOTAL				1986	1	1945	1	40

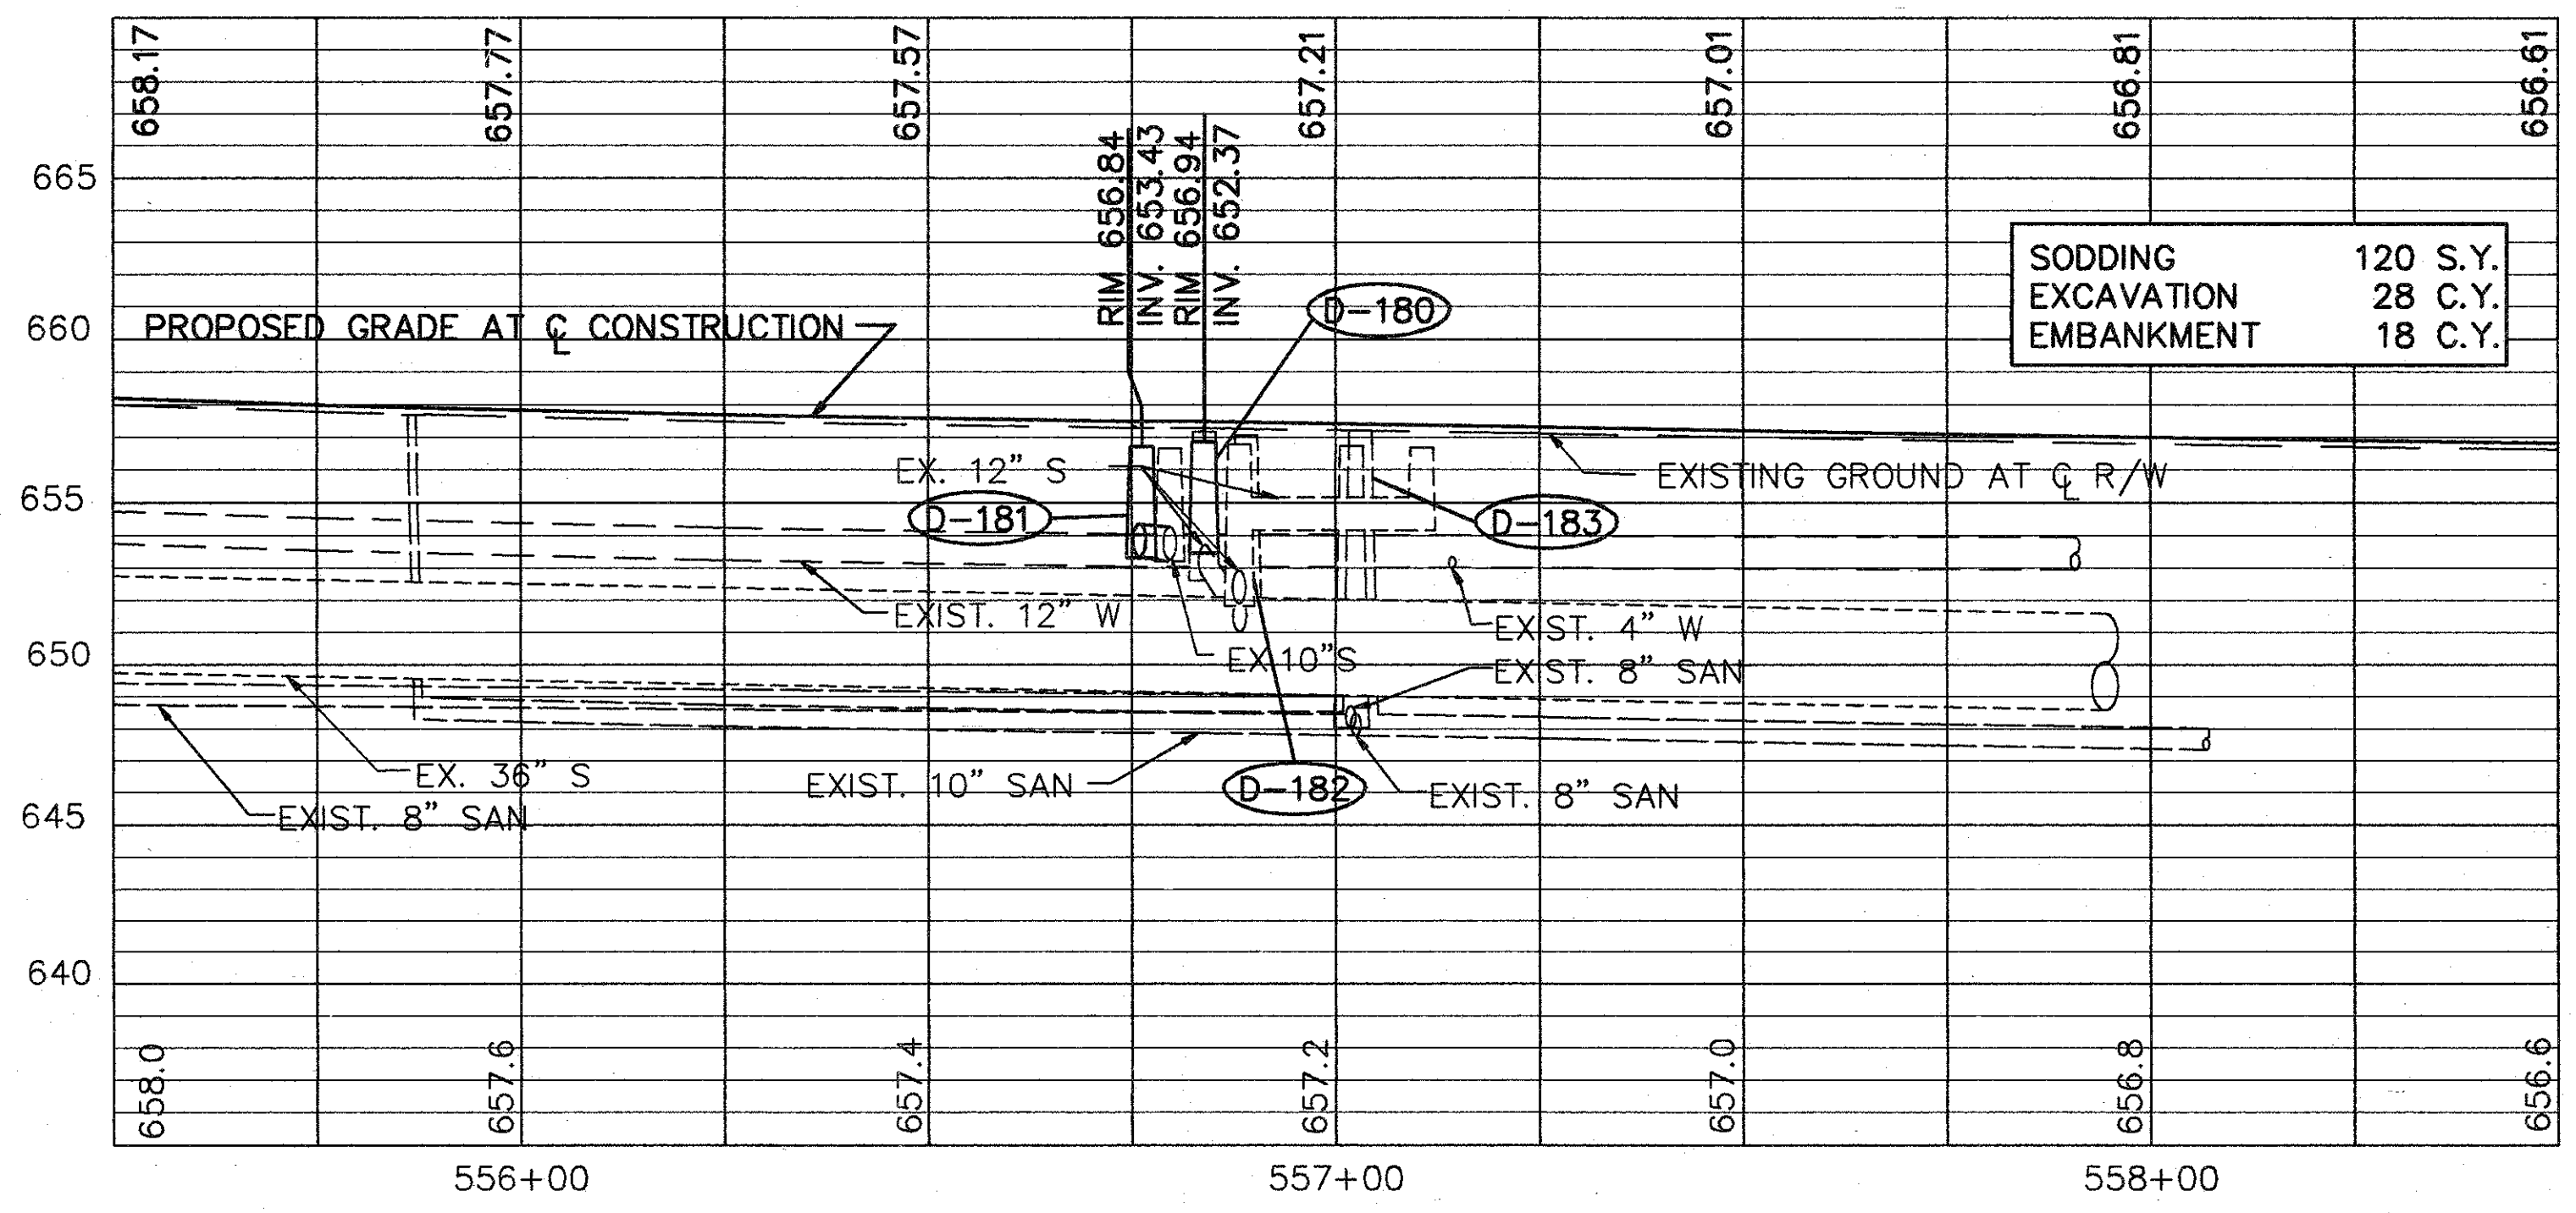

DRAINAGE				603	604	604	605	603	SPEC.
REF.	FROM	TO	SIDE	12" CONDUIT, TYPE B, 706.08, AS PER PLAN LIN. FT.	CATCH BASIN, NO. 3A, AS PER PLAN EACH	MANHOLE ADJUSTED TO GRADE, AS PER PLAN EACH	6" SHALLOW PIPE UNDER DRAIN WITH FABRIC WRAP LIN. FT.	6" CONDUIT, TYPE F, 707.17 NONPERFORATED, ASTM D-3034 SDR35, SS931 OR SS944 LIN. FT.	LOW STRENGTH MORTAR BACK FILL MATERIAL, CLASS LSM-50 CU. YD.
D-180	556+86		14.4'LT.	8	1				5.0
D-181	556+76		18.2'RT.	8	1				3.7
D-182	556+90		10'RT.			1			
D-183	557+03		1'RT.			1			
U-180	555+50	556+86	LT.				136	10	
U-181	555+50	556+78	RT.				132	10	
TOTAL				16	2	2	268	20	8.7

STA. 555+50 TO STA. 558+50