



H:\1998\98404\DWG\PRC060.DWG

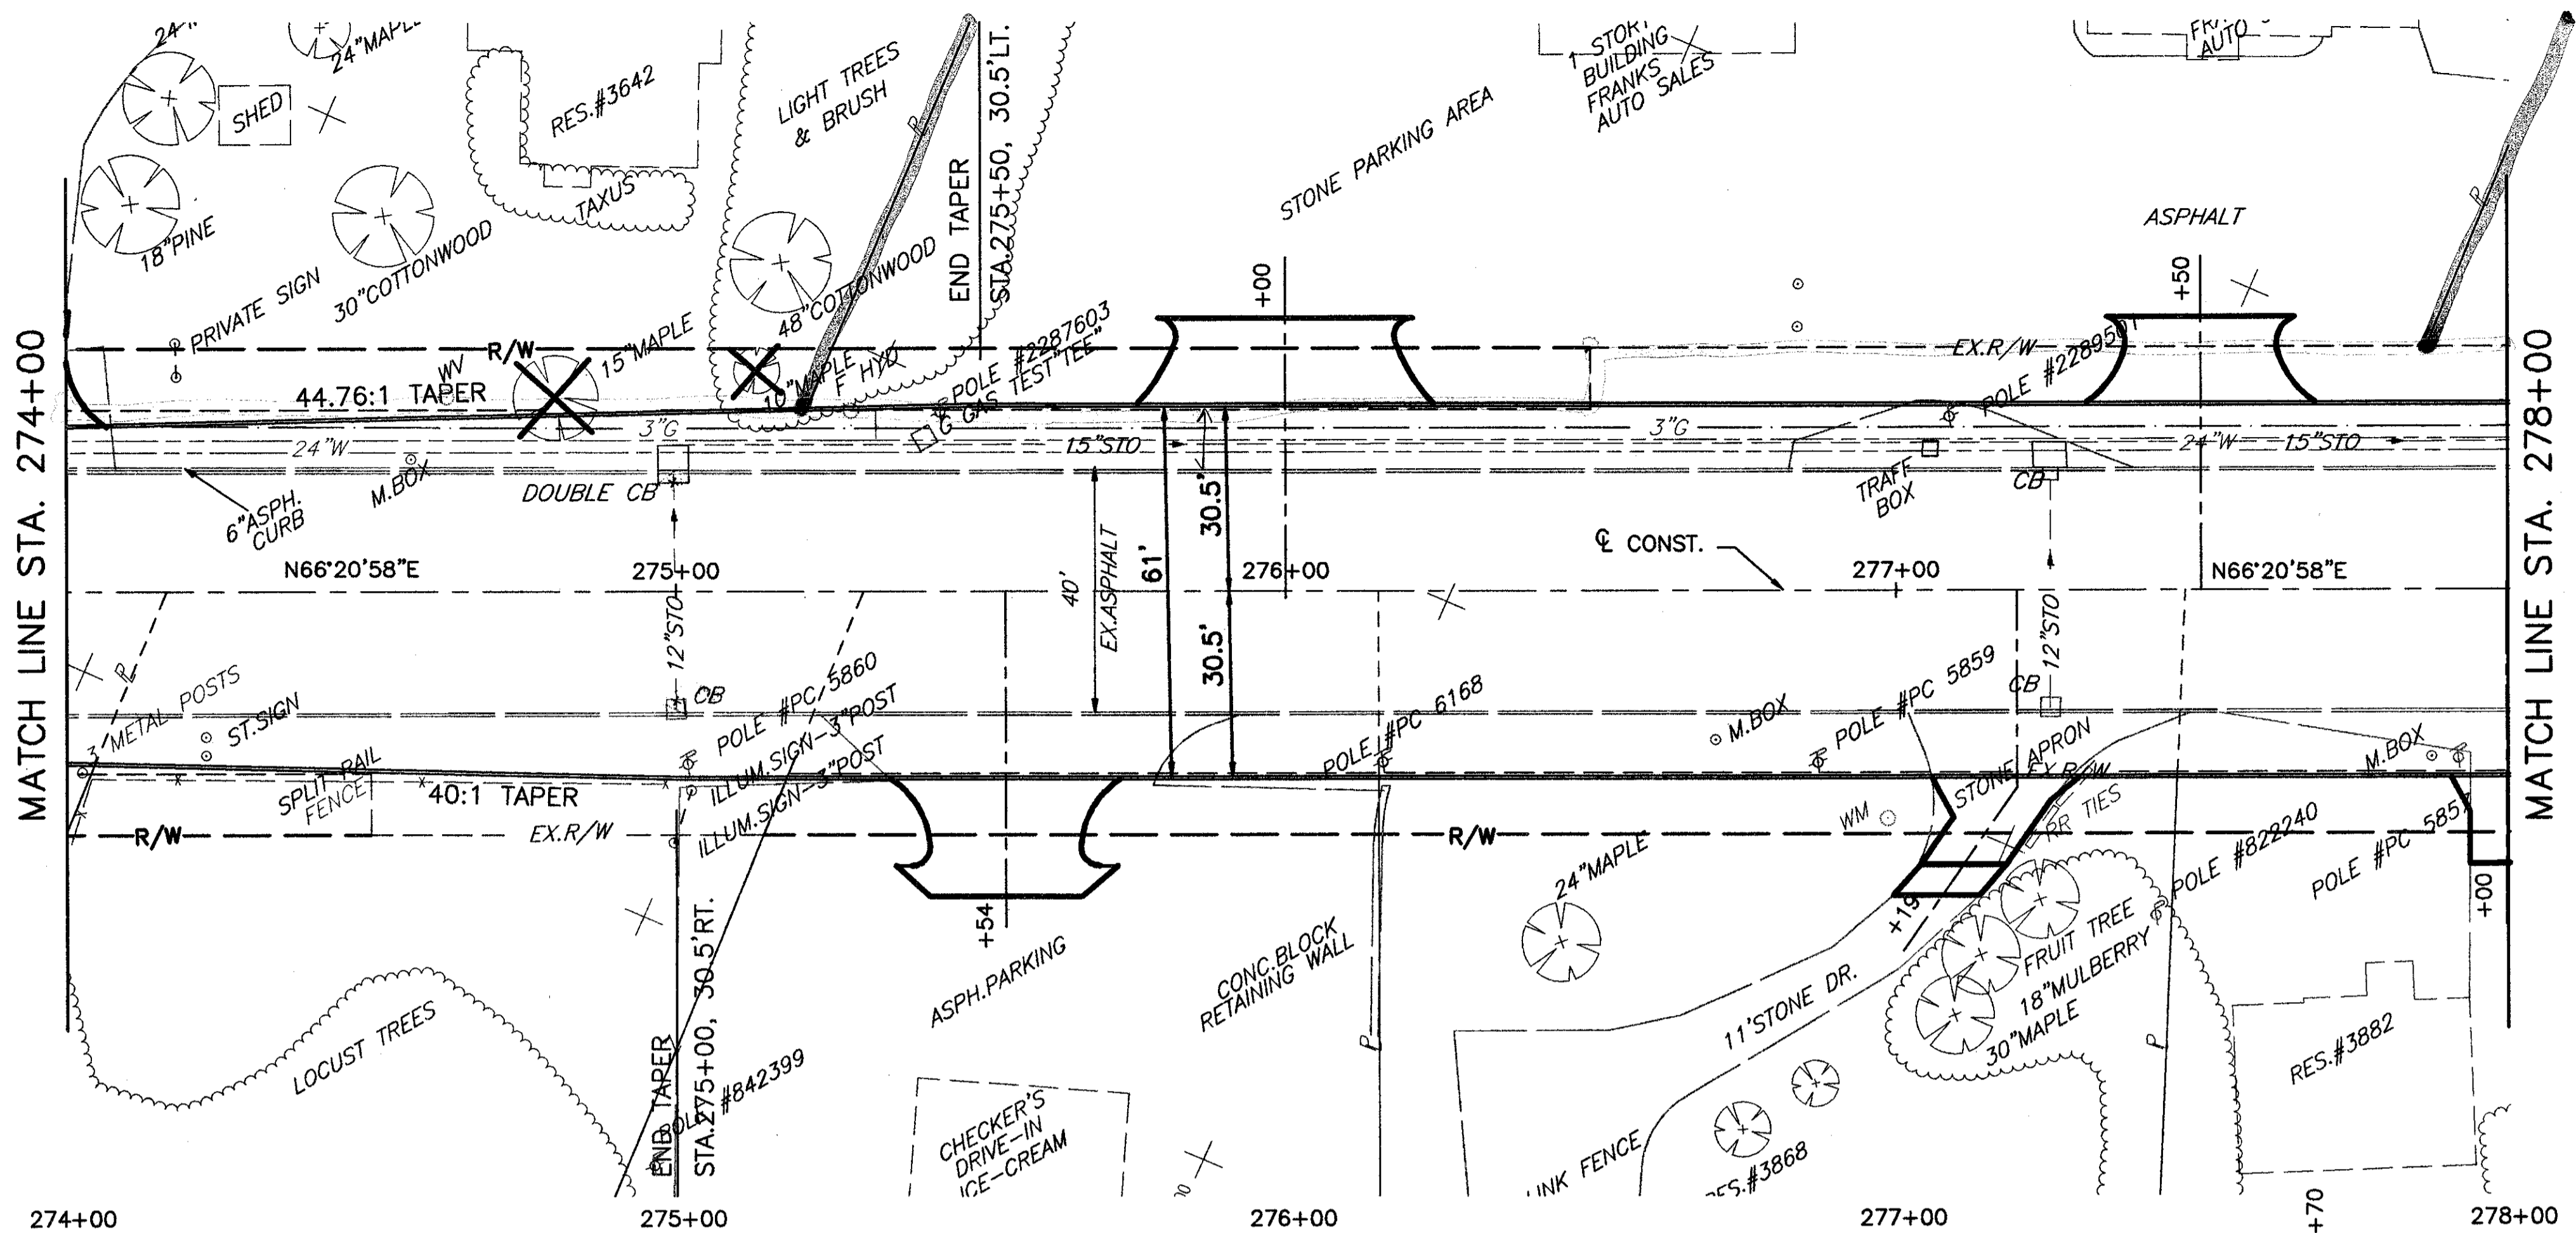

$L = WS$
 $57.5 = (10.5)(SS)$
 LT LENGTH = 400'
 TAPER LENGTH = 420'

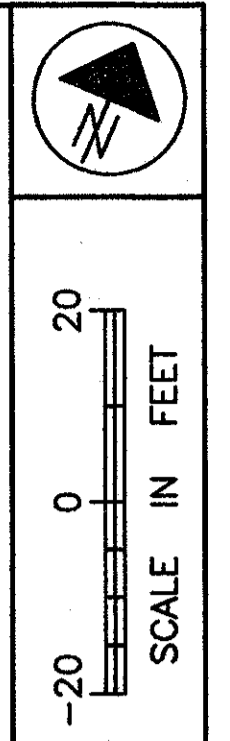

CALCULATED
 CHECKED

US ROUTE 20 PLAN AND PROFILE
 STA. 274+00 TO STA. 278+00

691.89	691.73	691.57	691.41	691.25	691.09	690.93	690.77	690.71	690.58
GR. = -0.32%									
EX. 15" STO									
EX. 24" W									
EX. STO 1B STA. 274+99.66, 19.2' LT. RIM 690.24 12" INV. 687.19 S 15" INV. 686.50 E							EX. STO 1B STA. 277+25.32, 19.6' LT. RIM 690.33 15" INV. 685.34 W 15" INV. 685.34 E 12" INV. 686.32 S		
VCL = 210.00' PVI STA. 278+75.00 ELEV. 690.37 SSD EXCEEDS DESIGN VALUE SSD = 609'									
PVC STA. 277+70.00									
MATCH LINE STA. 274+00									
MATCH LINE STA. 278+00									
691.84	691.73	691.62	691.44	691.25	691.14	690.92	690.76	690.57	
274+00	275+00	276+00	277+00	278+00					

LAK - 20 - 18.40