


ESTIMATED QUANTITIES		877	
LOCATION	SIDE	TEMPORARY PERIMETER FILTER FABRIC FENCE	TEMPORARY INLET PROTECTION FILTER FABRIC FENCE
		LIN.FT.	LIN.FT.
AT ALL INLETS & CATCH BASINS	LT & RT		650
AT ALL MANHOLES	LT & RT		240
STA. 398+75 TO STA. 405+00	LT	625	
STA. 10+50 TO STA. 13+00 (TOWNLINE)	LT	250	
STA. 11+00 TO STA. 11+50 (TOWNLINE)	RT	50	
STA. 12+50 TO STA. 13+50 (TOWNLINE)	RT	100	
STA. 406+00 TO STA. 409+50	LT	350	
STA. 410+00 TO STA. 412+00	LT	200	
STA. 277+50 TO STA. 279+50	RT	200	
STA. 402+50 TO STA. 403+25	RT	75	
STA. 6+00 TO STA. 7+00 (TOWNLINE)	LT & RT	200	
TOTALS		1,850	890

QUANTITIES CARRIED TO GENERAL SUMMARY

PROJECT DATA	
TOTAL AREA (RIGHT OF WAY) -----	4.39 AC.
AREA TO UNDERGO EXCAVATION, FILLING OR GRADING -----	3.34 AC.
RUNOFF COEFFICIENT FOR PRE-CONSTRUCTION SITE -----	0.6
RUNOFF COEFFICIENT FOR POST CONSTRUCTION SITE -----	0.7
SOIL DATA -----	SEE SOIL PROFILE
IMMEDIATE RECEIVING WATERS -----	EXISTING DITCH
SUBSEQUENT RECEIVING WATERS -----	LAKE ERIE

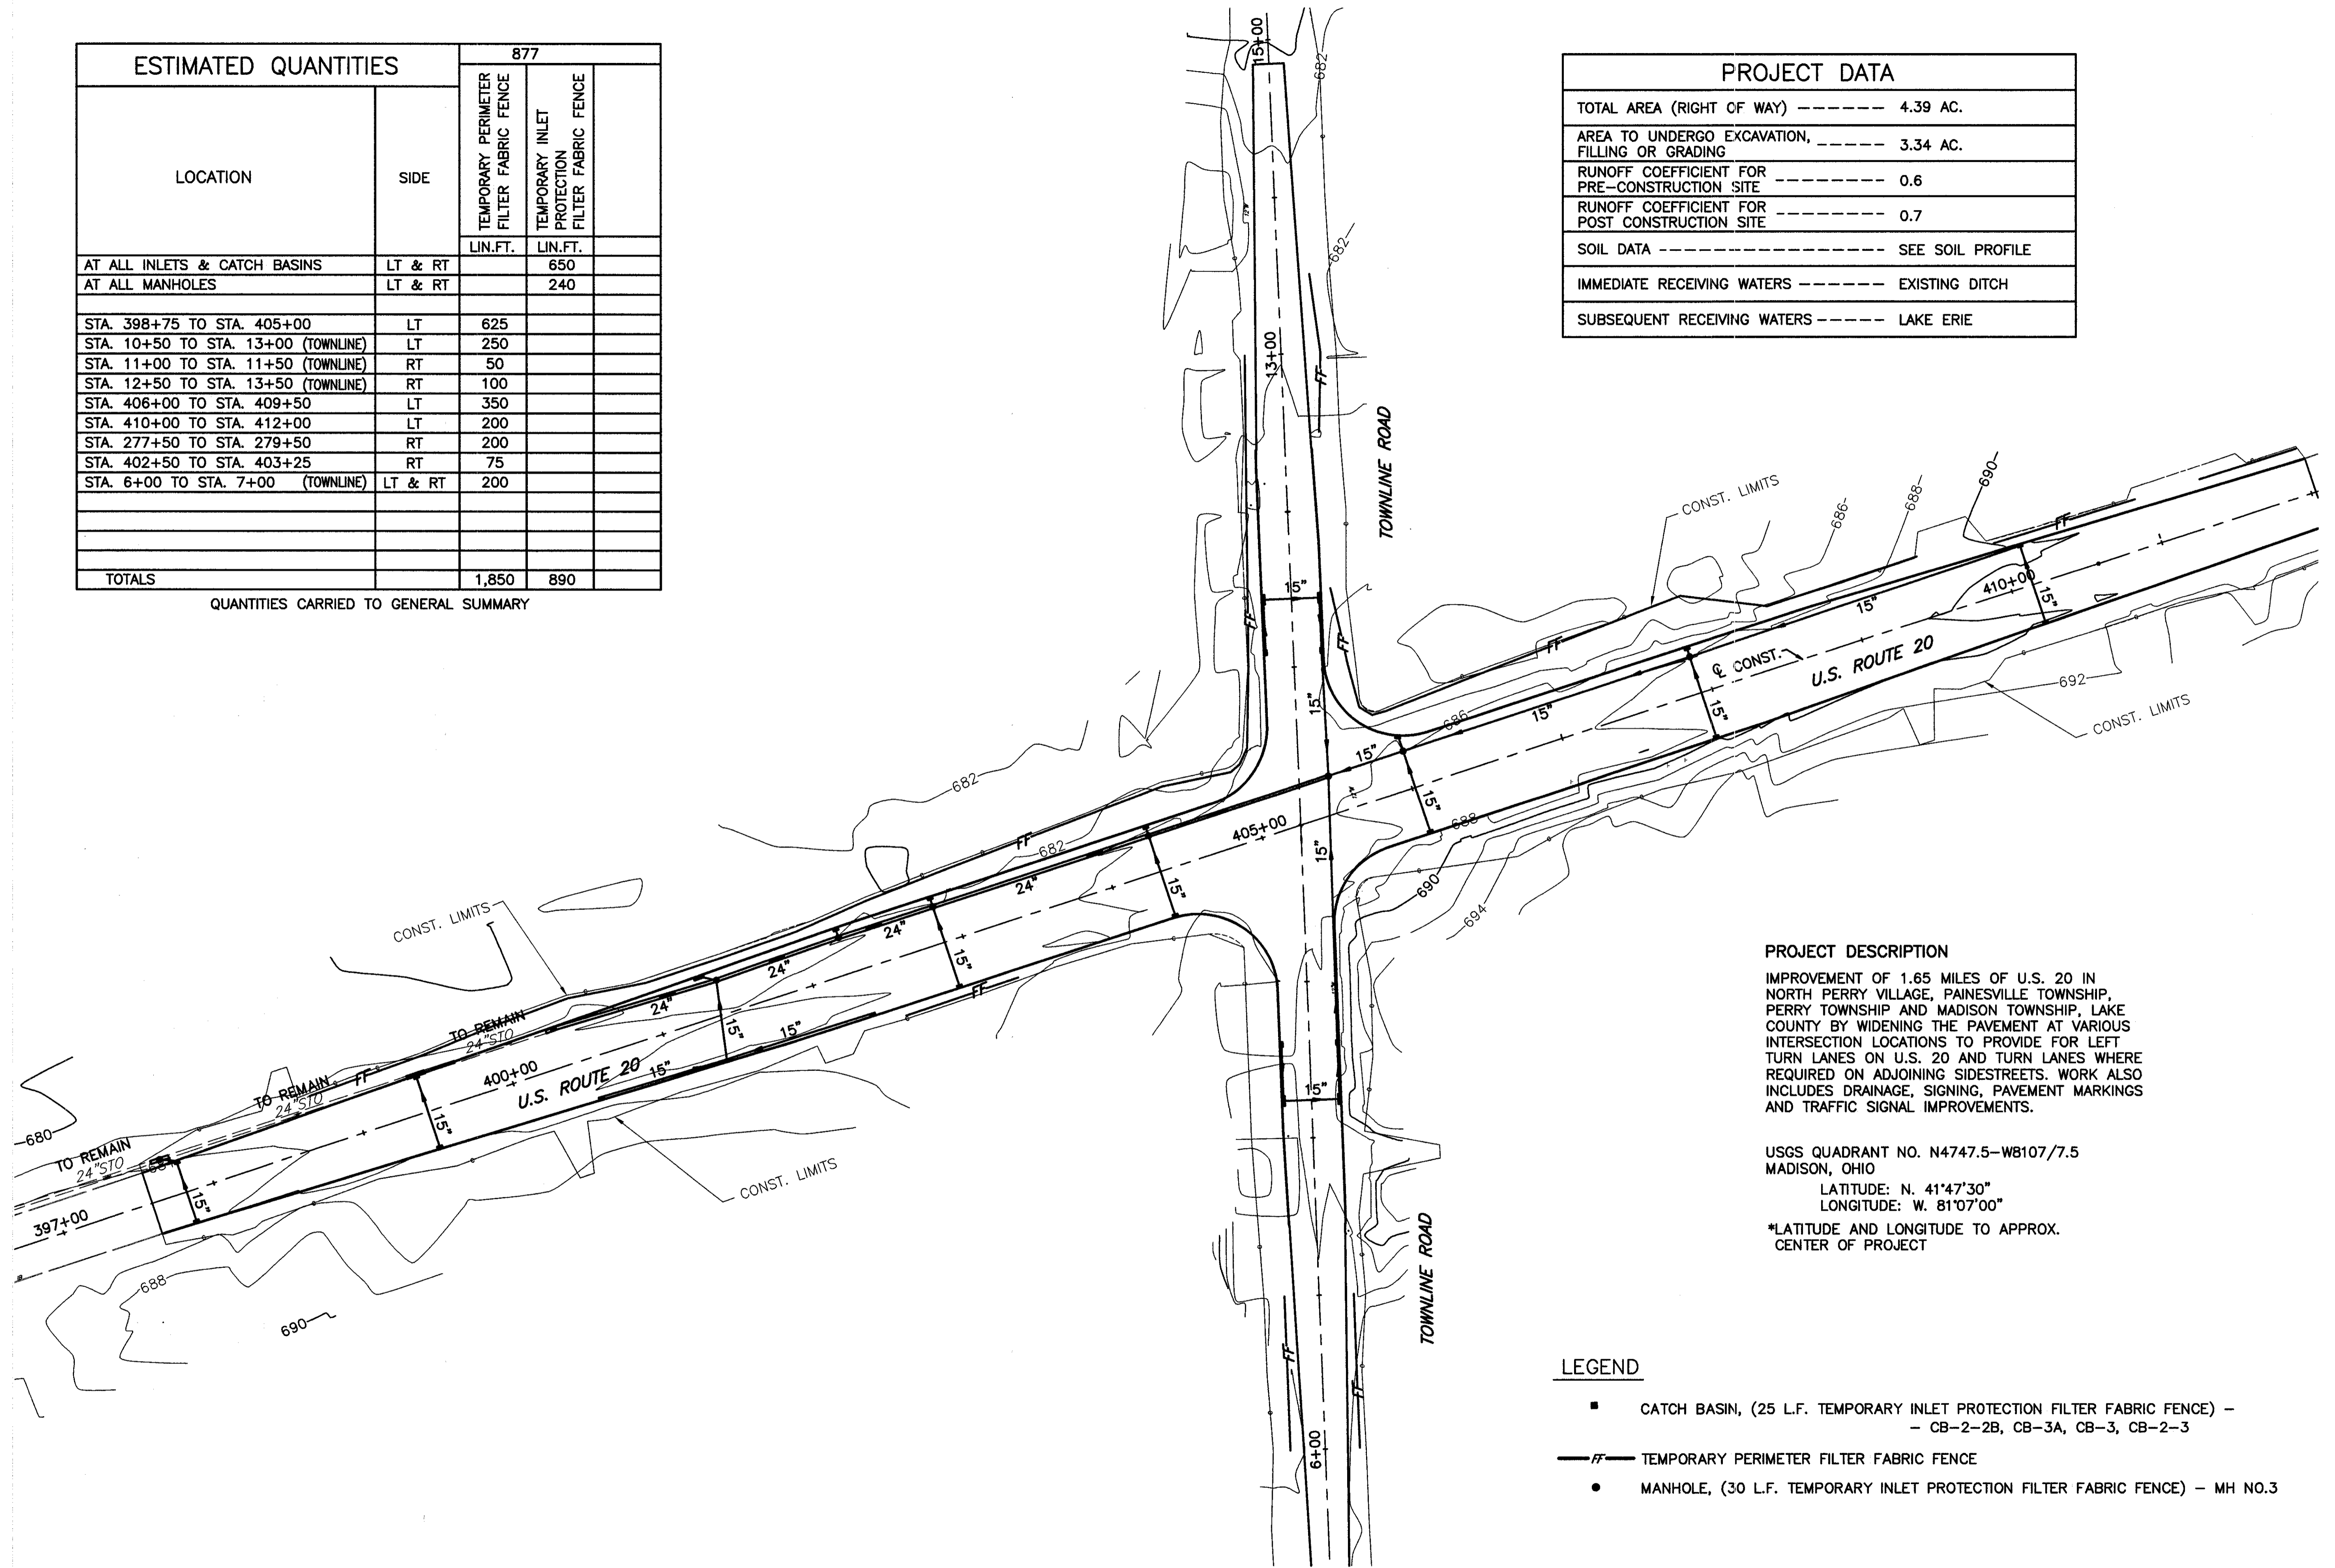

PROJECT DESCRIPTION
 IMPROVEMENT OF 1.65 MILES OF U.S. 20 IN NORTH PERRY VILLAGE, PAINESVILLE TOWNSHIP, PERRY TOWNSHIP AND MADISON TOWNSHIP, LAKE COUNTY BY WIDENING THE PAVEMENT AT VARIOUS INTERSECTION LOCATIONS TO PROVIDE FOR LEFT TURN LANES ON U.S. 20 AND TURN LANES WHERE REQUIRED ON ADJOINING SIDESTREETS. WORK ALSO INCLUDES DRAINAGE, SIGNING, PAVEMENT MARKINGS AND TRAFFIC SIGNAL IMPROVEMENTS.


USGS QUADRANT NO. N4747.5-W8107/7.5
 MADISON, OHIO

LATITUDE: N. 41°47'30"
 LONGITUDE: W. 81°07'00"

*LATITUDE AND LONGITUDE TO APPROX. CENTER OF PROJECT

LEGEND

- CATCH BASIN, (25 L.F. TEMPORARY INLET PROTECTION FILTER FABRIC FENCE) - CB-2-2B, CB-3A, CB-3, CB-2-3
- FF — TEMPORARY PERIMETER FILTER FABRIC FENCE
- MANHOLE, (30 L.F. TEMPORARY INLET PROTECTION FILTER FABRIC FENCE) - MH NO.3

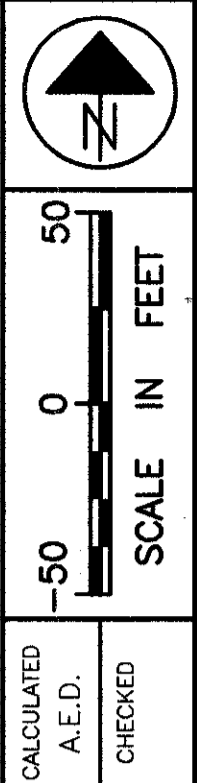

STORM WATER POLLUTION PREVENTION PLAN
 STA. 397+00 TO STA. 412+00

LAK - 20 - 18.72

H:\1998\98404\DWG\SWPPI.DWG