


ESTIMATED QUANTITIES		877		
LOCATION	SIDE	TEMPORARY PERIMETER FILTER FABRIC FENCE	TEMPORARY DITCH CHECK FILTER FABRIC FENCE	TEMPORARY INLET PROTECTION FILTER FABRIC FENCE
		LIN.FT.		LIN.FT.
AT ALL INLETS & CATCH BASINS	LT & RT			550
AT ALL MANHOLES	LT & RT			390
STA. 15+00 (GREEN ROAD)	LT		10	
STA. 487+80 TO STA. 489+00	LT	120		
STA. 496+50 TO STA. 497+50	LT	100		
STA. 499+00 TO STA. 499+50	LT	50		
STA. 12+00 TO STA. 14+25 (GREEN RD)	LT	225		
STA. 12+00 TO STA. 15+00 (GREEN RD)	RT	300		
STA. 487+80 TO STA. 488+75	RT	95		
STA. 490+75 TO STA. 492+25	RT	150		
STA. 493+50 TO STA. 501+82	RT	832		
TOTALS		1,872	10	940

QUANTITIES CARRIED TO GENERAL SUMMARY

PROJECT DATA	
TOTAL AREA (RIGHT OF WAY)	----- 3.55 AC.
AREA TO UNDERGO EXCAVATION, FILLING OR GRADING	----- 2.62 AC.
RUNOFF COEFFICIENT FOR PRE-CONSTRUCTION SITE	----- 0.6
RUNOFF COEFFICIENT FOR POST CONSTRUCTION SITE	----- 0.7
SOIL DATA	----- SEE SOIL PROFILE
IMMEDIATE RECEIVING WATERS	----- EXISTING DITCH
SUBSEQUENT RECEIVING WATERS	----- LAKE ERIE

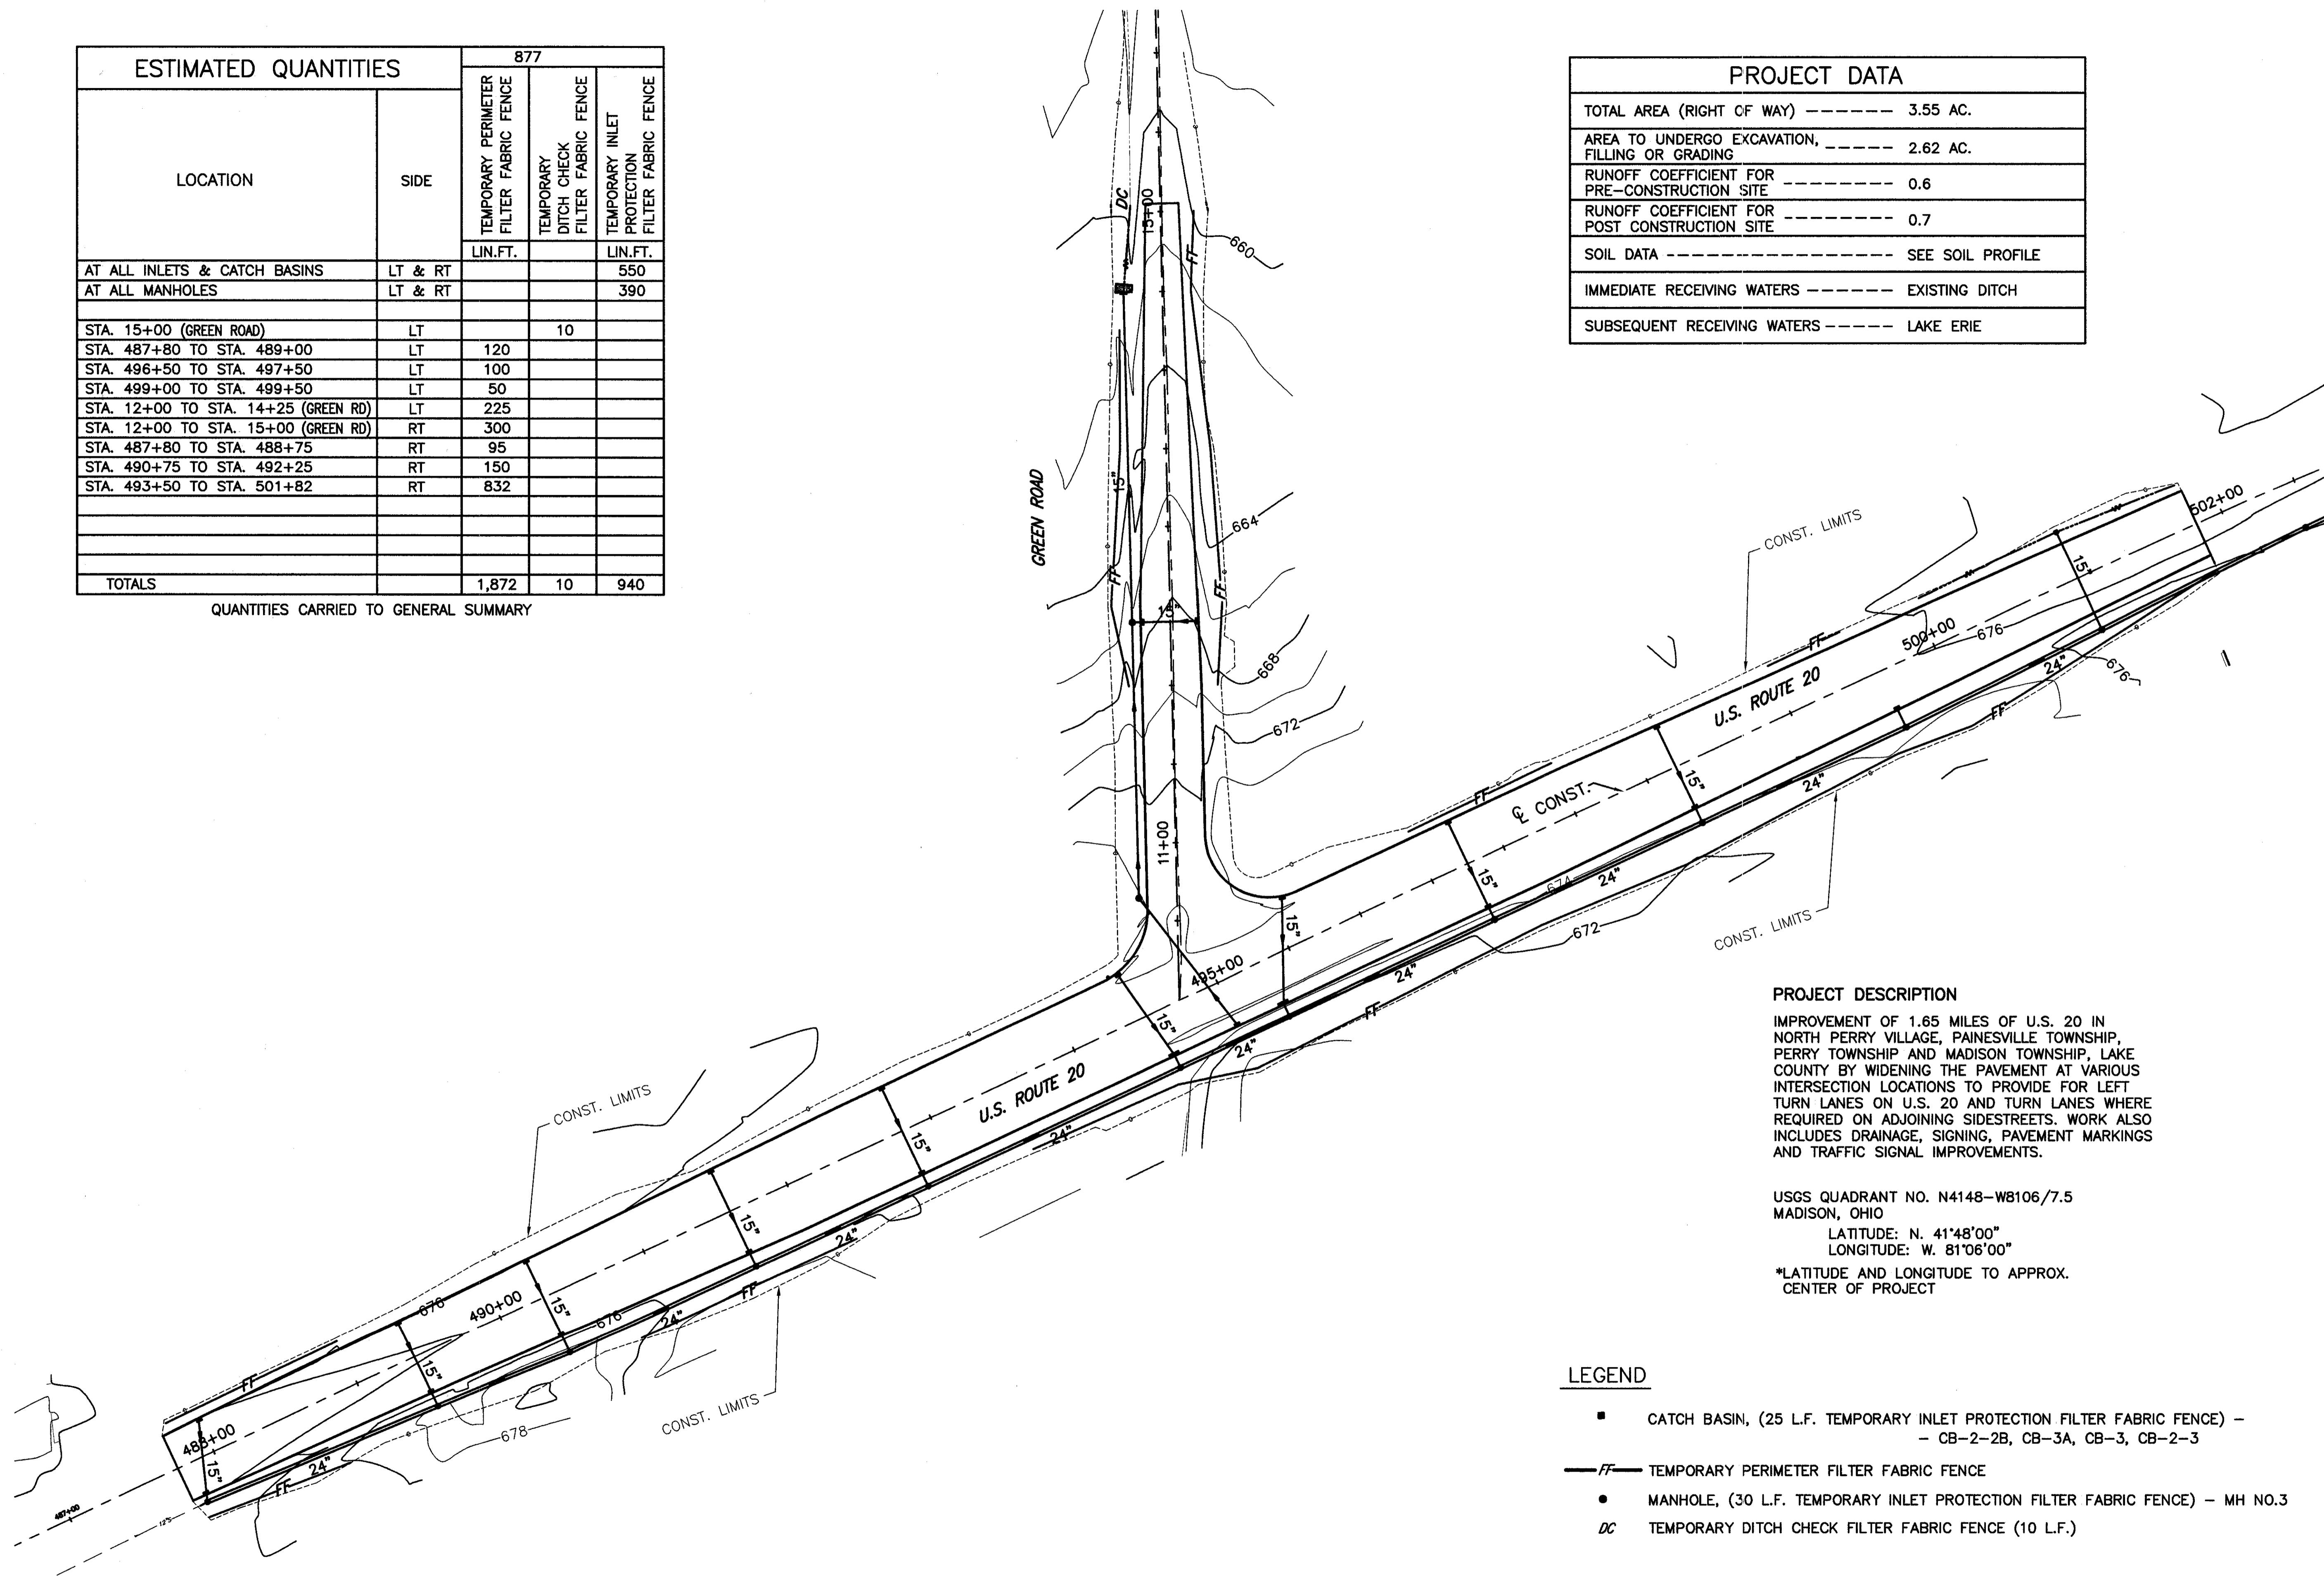

PROJECT DESCRIPTION


IMPROVEMENT OF 1.65 MILES OF U.S. 20 IN NORTH PERRY VILLAGE, PAINESVILLE TOWNSHIP, PERRY TOWNSHIP AND MADISON TOWNSHIP, LAKE COUNTY BY WIDENING THE PAVEMENT AT VARIOUS INTERSECTION LOCATIONS TO PROVIDE FOR LEFT TURN LANES ON U.S. 20 AND TURN LANES WHERE REQUIRED ON ADJOINING SIDESTREETS. WORK ALSO INCLUDES DRAINAGE, SIGNING, PAVEMENT MARKINGS AND TRAFFIC SIGNAL IMPROVEMENTS.

USGS QUADRANT NO. N4148-W8106/7.5
MADISON, OHIO
LATITUDE: N. 41°48'00"
LONGITUDE: W. 81°06'00"

*LATITUDE AND LONGITUDE TO APPROX. CENTER OF PROJECT

LEGEND

- CATCH BASIN, (25 L.F. TEMPORARY INLET PROTECTION FILTER FABRIC FENCE) - CB-2-2B, CB-3A, CB-3, CB-2-3
- FF— TEMPORARY PERIMETER FILTER FABRIC FENCE
- MANHOLE, (30 L.F. TEMPORARY INLET PROTECTION FILTER FABRIC FENCE) - MH NO.3
- DC TEMPORARY DITCH CHECK FILTER FABRIC FENCE (10 L.F.)

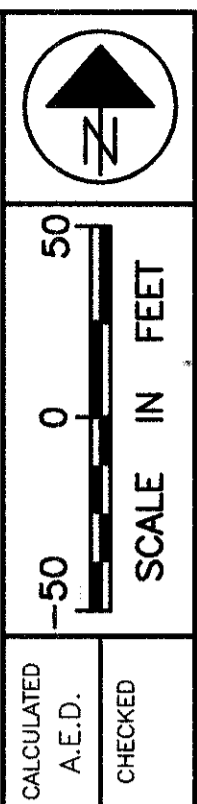

STORM WATER POLLUTION PREVENTION PLAN
STA. 488+00 TO STA. 502+00

LAK - 20 - 18.72