


SUMMARY OF QUANTITIES ROADWAY PROPER

Excavation	404 Cu. Yds.
Borrow	5925 Cu. Yds.
24" x 4 3/4" Integral Concrete flush curb	1929 Lin. Ft.
Old Pav. to be removed (4" brick on 5" conc. base monolithic)	1112 Sq. Yds.
Type D-1, D-2, D-3 or D-4 Guard Rail	928 Lin. Ft.
7" Concrete Base	2340 Sq. Yds.
4" Vit. Paving Block (3/4" sand cushion & 1:1 cement grout)	1911 Sq. Yds.
Trees to be removed	4
Finishing Berms (both sides)	964 Lin. Ft.

CULVERT

Wet Excavation	127 Cu. Yds.
Dry Excavation	150 Cu. Yds.
1-6 1/2" Concrete (Footings)	92 Cu. Yds.
1-6 1/2" Concrete (walls)	237 Cu. Yds.
1-5 1/2" Concrete (slab)	46 Cu. Yds.
Reinforcing Steel	7561 Lbs.
Remove Old Bridge	

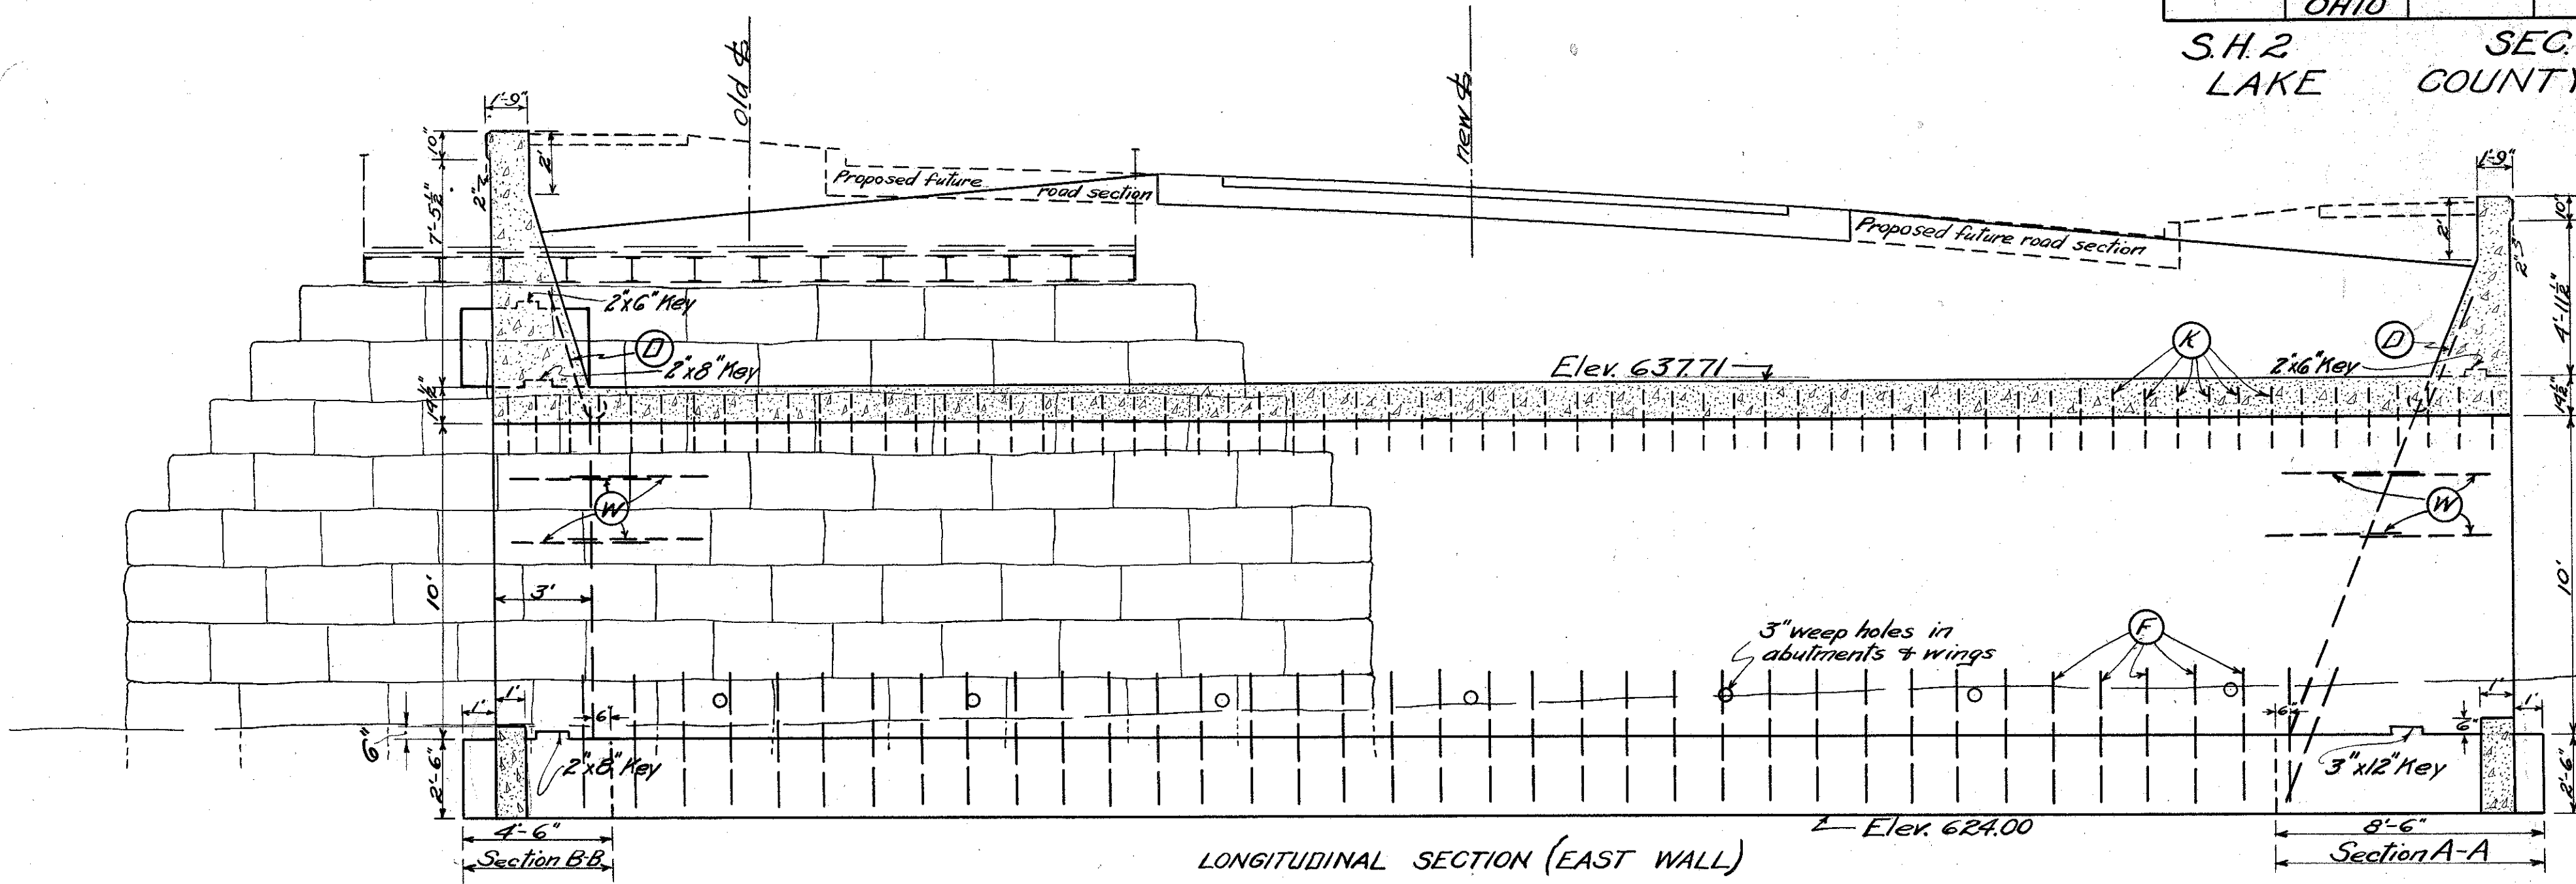

STEEL LIST					
MARK	SIZE	Nº	LENGTH	WEIGHT	SPACING
F	5/8"	117	4'-6"	549	1'-6"
K	5/8"	131	2'-0"	273	1/3 staggered
S	1"	144	16'-0"	6152	5 1/2"
T	1/2"	12	34'-6"	277	2'-0"
W	3/4"	16	9'-0"	216	
D	5/8"	18	5'-0"	94	1'-6"
TOTAL 7561 LBS.					

