


NOTE - FOR DETAILS OF STERS AT STA. 557+02, SEE SHEET No. 61.

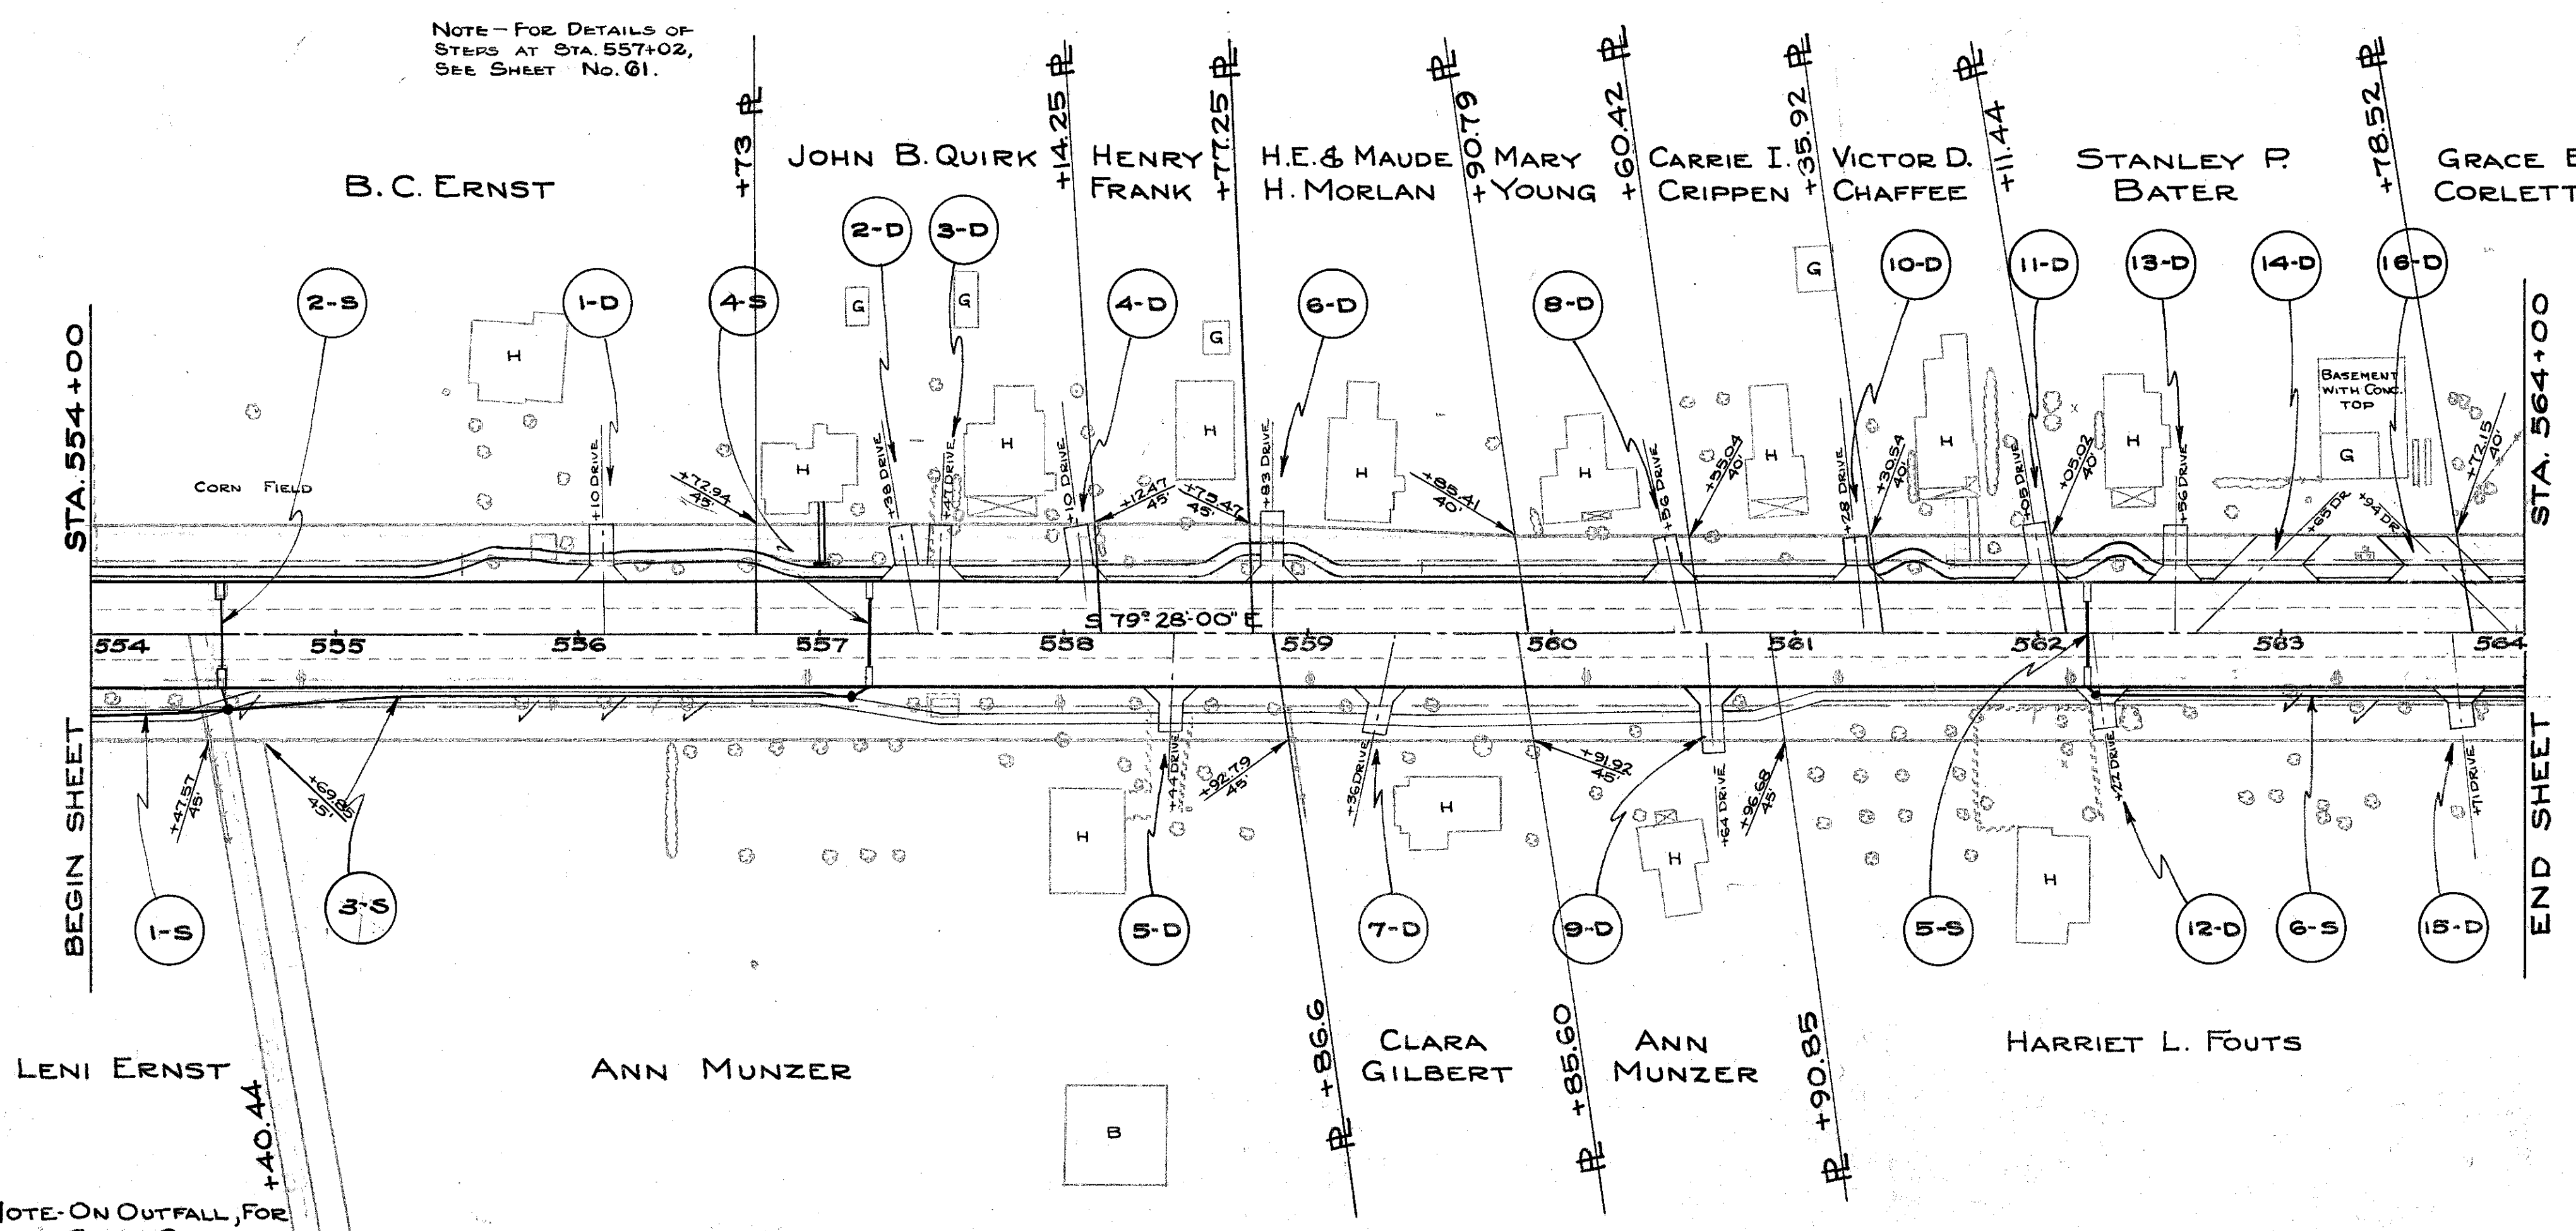


STORM SEWERS							
MARK	STATION		SIDE	PIPE - LIN. FT.		CATCH BASINS * 13-X	* SPEC. M.H.
	FROM	TO		UNDER PAVEMENT	12" 24"		
1-S	554+0	554+55	RT.		51		1
2-S	554+56			33	16	2	1
3-S	554+55	557+15	RT.		257		
4-S	557+20			33	6	2	
5-S	562+20			33		2	
6-S	562+25	564+0	RT.		174		1
TOTALS				99	459 51	6	3

\* See sheet 44 for details.

DRIVES AND APPROACHES							
MARK	STA.	SIDE	CU.YDS. AGG.	6" T. TO 50 YDS.	DUCT. L.F. DR. PIPE	L.F. CURB	
							1-D
2-D	557+38	LT.	1.5	11.0	18		
3-D	557+47	LT.	1.5	11.0	18		
4-D	558+10	LT.	1.5	11.9	22		
5-D	558+44	RT.	0.5	20.8	22		
6-D	558+83	LT.	1.2	21.9	22		
7-D	559+36	RT.	0.5	21.9	22		
8-D	560+56	LT.	1.1	11.9	22		
9-D	560+64	RT.	1.4	20.8	22		
10-D	561+28	LT.	1.1	11.9	22		
11-D	562+05	LT.	1.5	11.9	22		
12-D	562+22	RT.	1.1	11.9	22		
13-D	562+56	LT.	1.5	11.9	22		
14-D	562+65	LT.	3.2	26.3	42		
15-D	563+71	RT.	1.1	11.9	22		
16-D	563+94	LT.	3.2	26.3	42		
TOTALS				22.9	260.8	384	

NOTE - ON OUTFALL, FOR STORM SEWER QUANTITIES SEE SHEET No. 48

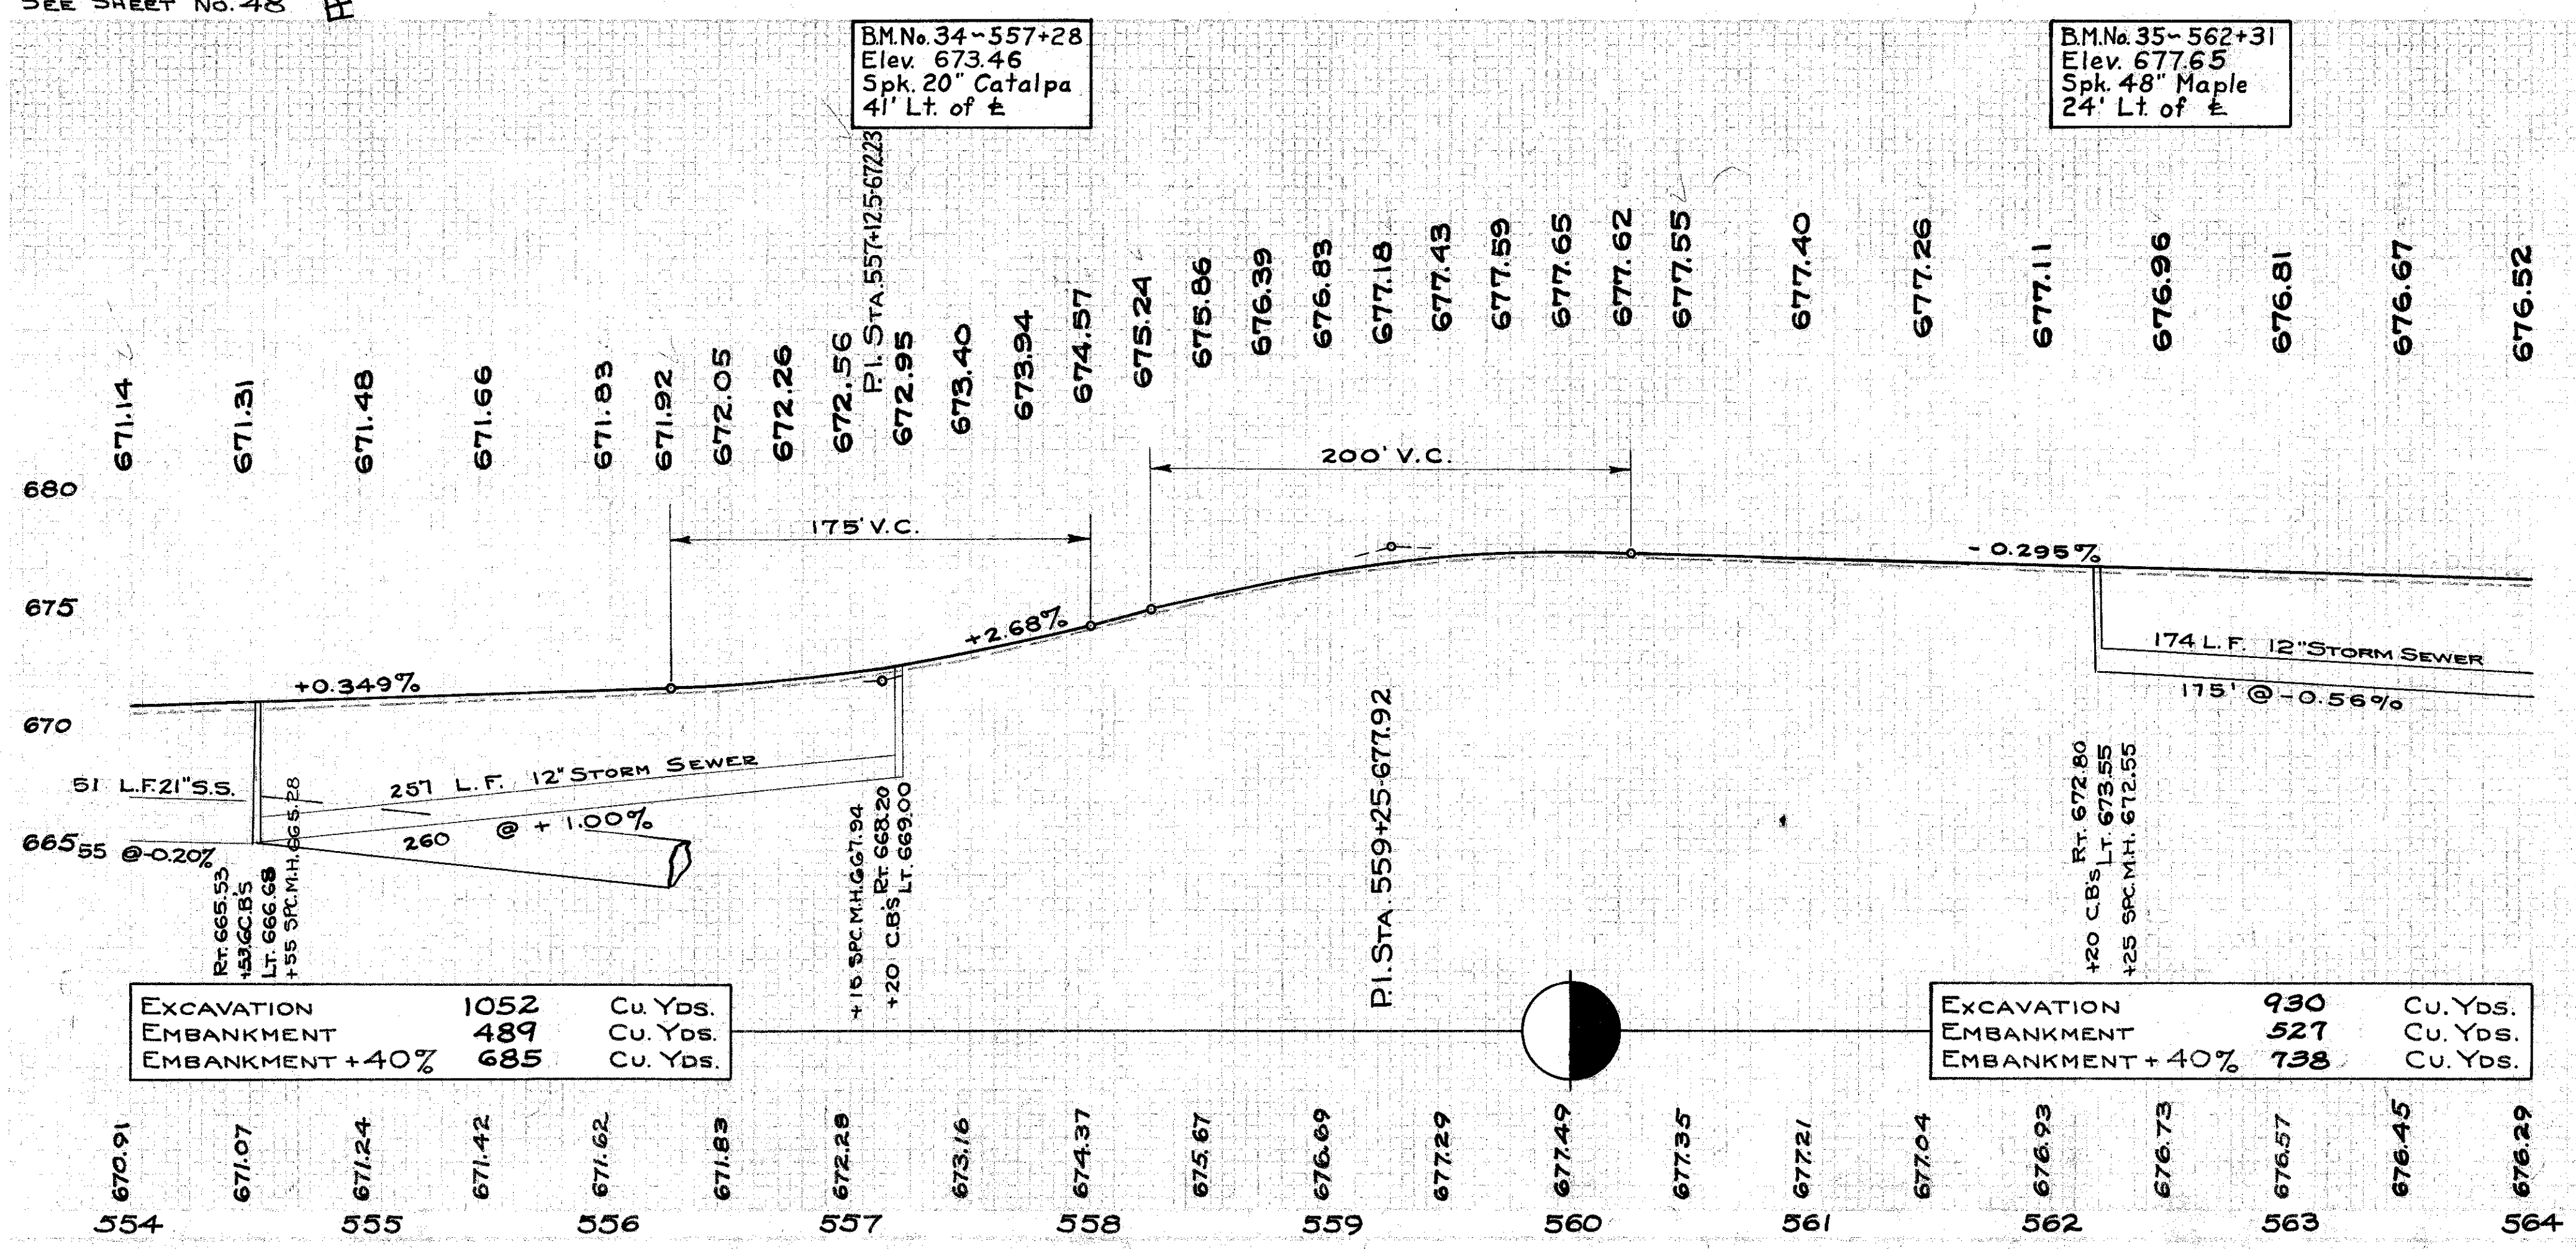

TREES TO BE REMOVED MARKED THUS				
STA.	SIDE	DIST.	SIZE	KIND
554+57	RT	27	20	STR
555+16	RT	27	36	STR
556+10	RT	28	36	STR
556+43	RT	28	36	STR
563+02	RT	22	43	MAPLE
563+29	RT	30	16	STR
TOTAL THIS SHEET 6 TREES				

SIDEWALK					
STATION FROM	STATION TO	SIDE	LGTH.	WDTH.	SQ. FT.
554+0	558+39	RT.	441	4'-6"	1984.5
558+49	559+23	RT.	74	4'-6"	333
559+33	560+61	RT.	128	4'-6"	576
560+71	562+18	RT.	148.0	4'-6"	666.0
562+25	563+66	RT.	1335	4'-6"	6008
563+80.5	564+0	RT.	195	4'-6"	877
554+00	556+05	LT.	206	4'-6"	927.0
556+15	557+30	LT.	116	4'-6"	522.0
557+54	558+02	LT.	48	4'-6"	216.0
558+17	558+78	LT.	63	4'-6"	283.5
558+88	560+44	LT.	158	4'-6"	711.0
560+60	561+20	LT.	60	4'-6"	270.0
561+33	561+96	LT.	64	4'-6"	288.0
561+74		LT.	11.5	3'-6"	40.2
562+10	562+49	LT.	42	4'-6"	189.0
562+63.5	562+74.5	LT.	11	4'-6"	49.5
563+12	563+46	LT.	34	4'-6"	153.0
563+82	564+00	LT.	18	4'-6"	81.0
557+02		LT.	10	2'-0"	20.0
TOTALS					7998.2

REMOVAL OF EXISTING PAV'T.				
STATION FROM TO	LGTH.	WDTH.	SQ. YDS.	
554+49 554+57	8	20	17.8	
557+16 557+24	8	20	17.8	
562+16 562+24	8	20	17.8	
TOTAL 53.4				

REPLACEMENT FOR DEFECTIVE AREAS & CROSSOVERS				
STATION FROM TO	LGTH.	WDTH.	SQ. YDS.	
554+49 554+57	8	20	17.8	
557+16 557+24	8	20	17.8	
562+16 562+24	8	20	17.8	
TOTAL 53.4				

REMOVAL OF EXIST. SIDEWALK				
STATION	SIDE	LGTH.	WDTH.	SQ. FT.
557+02	LT.	14.0	2'-0"	28.0
561+74	LT.	16.0	3'-6"	56.0
TOTAL 84.0				

SEALING (ONLY) EDGES OF EXISTING PAV'T & NEW BASE			
STATION FROM TO	SIDE	LN. FT.	LENGTH
554+0 564+0	RT. & LT.	4000	
TOTAL 4000			

EXCAVATION	1052	Cu. Yds.
EMBANKMENT	489	Cu. Yds.
EMBANKMENT + 40%	685	Cu. Yds.

EXCAVATION	930	Cu. Yds.
EMBANKMENT	527	Cu. Yds.
EMBANKMENT + 40%	738	Cu. Yds.