

ASPHALT CONCRETE SHEET




REGISTERED
JEL
CHECKED

PLOT SUBMITTED: 05-FEB-1998 09:48


16981gaa.dgn

PLOTTED BY: coop2
PLOTTER: PLOTTER

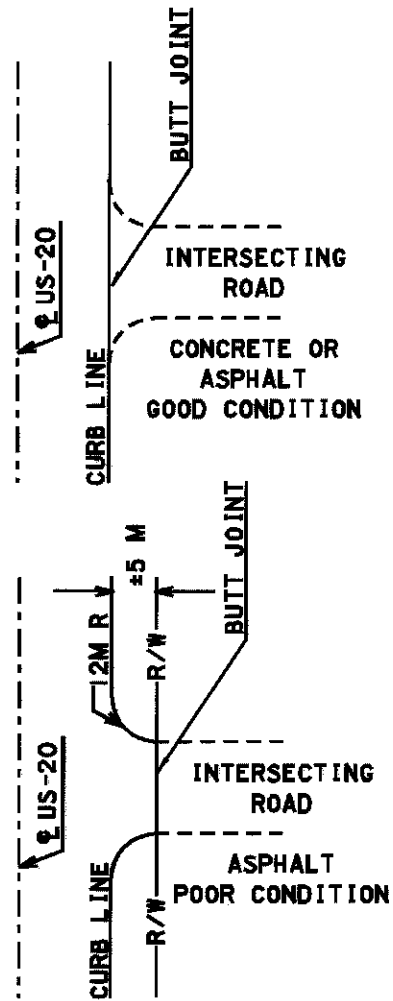

INTERSECTION JOINT DETAIL

THE LOCATION OF THE BUTT JOINT SHALL BE SPECIFIED BY THE ENGINEER, BUTT JOINTS SHALL BE USED AT ALL INTERSECTING ROADS.

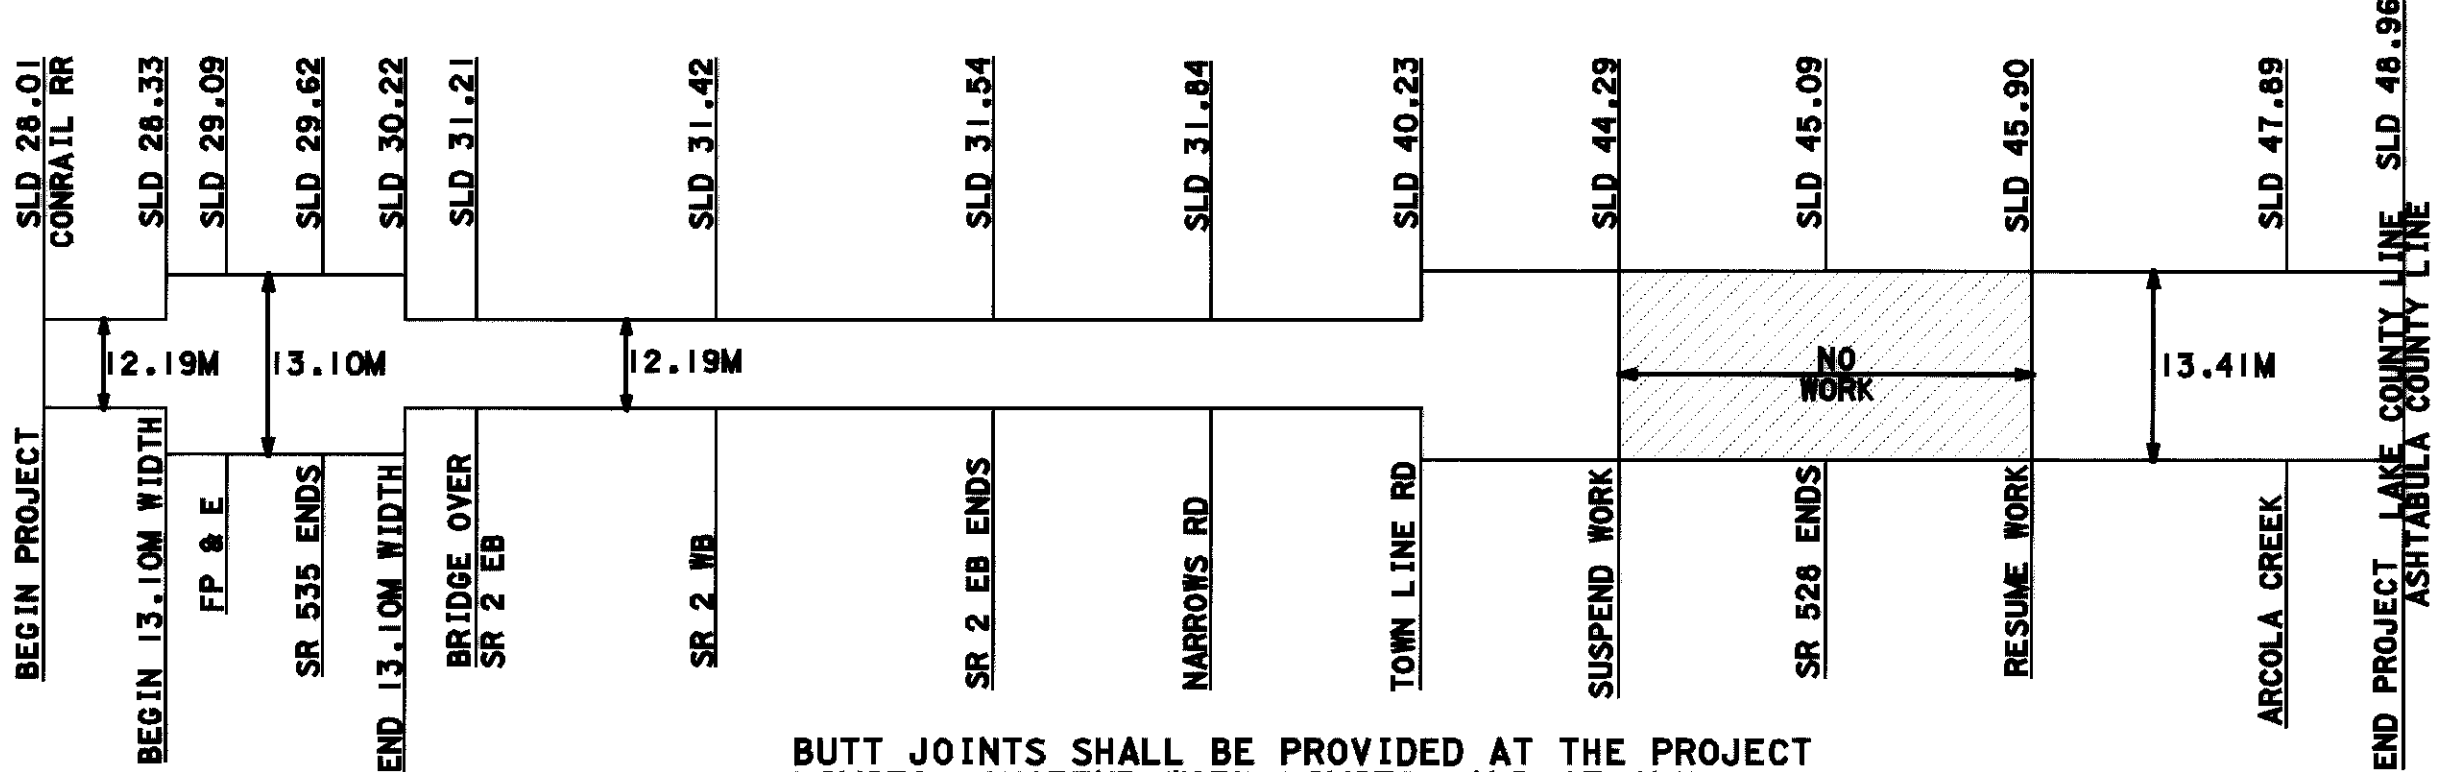

BUTT JOINTS SHALL BE PROVIDED AT THE PROJECT LIMITS, SUSPEND WORK LIMITS, AND AT ANY STRUCTURES ENCOUNTERED ON US-20.

* SR-2/US-20 INTERCHANGE AREA (INCLUDES ADDITIONAL AREA FOR RAMPS)

LOG POINT TO LOG POINT	SIDE	LENGTH L	AVERAGE WIDTH W	SURFACE AREA A A=LxW	254	407	448
					PAVEMENT PLANING, BITUMINOUS	TACK COAT RATE = 0.15 L/SQ. M.	ASPHALT CONCRETE SURFACE COURSE, 9.5 mm, PG64-22 38 mm
					SO. M.	LITER	CU. M.
28.01 - 28.33		320	12.19	3900.80	3901	585.12	148.23
28.33 - 30.22		1890	13.10	24759.00	24759	3713.85	940.84
30.22 - 31.28		1060	12.19	12921.40	12921	1938.15	491.01
* 31.28 - 31.80		520	VARIES	8278.99	8279	1241.85	314.60
31.80 - 40.23		8430	12.19	102761.70	102762	15414.30	3904.94
40.23 - 44.29		4060	13.41	54444.60	54445	8166.75	2068.89
44.29 - 45.90		1610	13.41	(SUSPEND WORK #805 M EAST AND WEST OF SR-528)			
45.90 - 48.96		3060	13.41	41034.60	41035	6155.19	1559.31
ADDITIONAL AREA FOR INTERSECTIONS				1530.00	1530	229.50	58.14
TOTALS				249632.09	249632	37444.71	9485.98

PAVEMENT QUANTITY SHEET

LAK-20-28.014