

CURVE	RADIUS	LENGTH	CHORD	BEARING	DELTA ANGLE
C1	60.00'	56.86'	54.75'	N 29°20'21" E	54°17'41"
C2	35.00'	28.60'	27.82'	S 25°36'18" W	46°49'35"

CERTIFICATION:

I THE UNDERSIGNED HEREBY CERTIFIES THAT THIS TOPOGRAPHY INDICATED BY 1 FOOT CONTOURS AND ELEVATION SHOWN HEREON REPRESENTS AN ACTUAL SURVEY MADE BY ME ON THE 22nd DAY OF MAY, 2012 AND THE ELEVATIONS WERE TAKEN AT AN APPROPRIATE INTERVAL AND AS OF THAT DAY THEY EXISTED AS INDICATED HEREON.

I HEREBY CERTIFY THAT THIS PLAN WAS PREPARED BY ME AND IS CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF


David W. Novak
DAVID W. NOVAK, P.S. No. 7507

GENERAL NOTES:

1. BENCHMARK - TOP STEM OF EXISTING FIRE HYDRANT LOCATED IN FRONT SUBLOT 19, ELEVATION = 616.33.
2. DRIVEWAY APRON TO BE 6" THICK CONCRETE.
3. ALL DOWNSPOUTS TO BE OUTLETED OVER THE BANK TOWARD THE LAKE AS DIRECTED BY LAKE COUNTY ENGINEERS OFFICE.
4. CONTRACTOR RESPONSIBLE FOR CONTACTING THE OHIO UTILITY PROTECTION SERVICE (1.800.362.2764) AND ALL UTILITY COMPANIES A MINIMUM OF 48 HOURS PRIOR TO CONSTRUCTION.
5. THE LOCATION BOTH HORIZONTAL AND VERTICAL OF EXISTING UNDERGROUND UTILITIES SHOWN HEREON, HAVE BEEN OBTAINED BY A DILIGENT AND COMPREHENSIVE SEARCH OF AVAILABLE RECORDS. VERIFICATION BY FIELD OBSERVATION HAS BEEN CONDUCTED WHERE PRACTICAL, HOWEVER, BARRINGTON CONSULTING GROUP, INC. DOES NOT GUARANTEE THE COMPLETENESS, NOR ACCURACY THEREOF.
6. CONTRACTOR SHALL VERIFY ELEVATIONS OF LATERAL INVERTS IN THE FIELD PRIOR TO FOUNDATION EXCAVATION.
7. SEE SHEET 2 FOR EROSION AND SEDIMENT-CONTROL PLAN
8. SEE SHEET 2 FOR SEEDING INFORMATION

Stormwater Management Plan
Approved as shown and/or noted
JAMES R. GILLS, P.E.
County Drainage Engineer

By *L.S.* Date *6/19/2012*

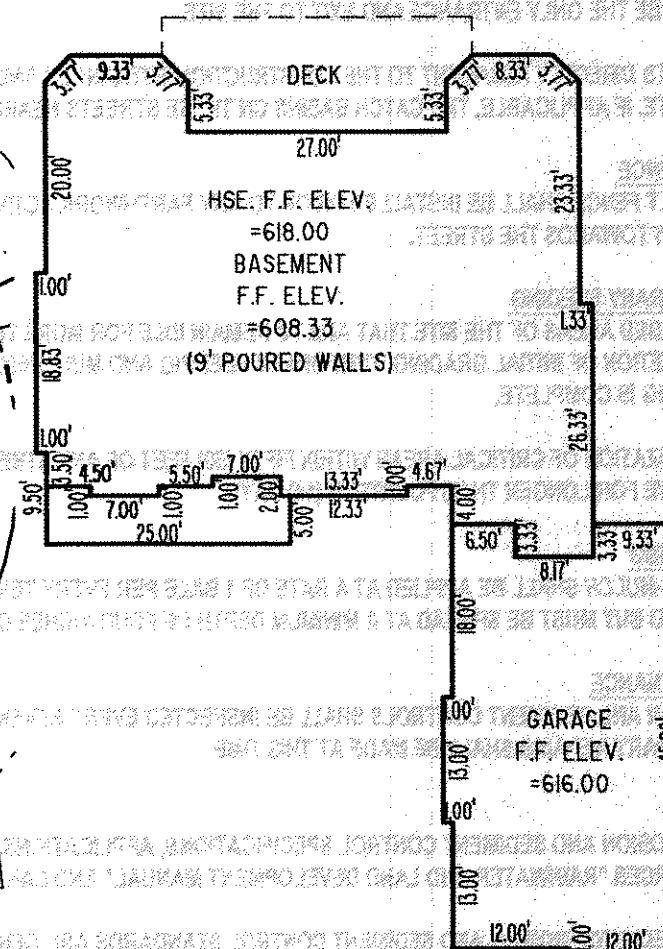


GRAPHIC SCALE



(IN FEET)
1 inch = 30 ft.

FORM W:\BLOCKS\FORMS\BCGA3-SHARP.DWG

Barrington
CONSULTING GROUP, INC.
9114 TYLER BLVD., MENTOR, OHIO 44060
PHONE 440.285.1260 FAX 440.285.1262
www.BarringtonCGI.com



SITE PLAN
1002 NORTH SHORE DR., PAINESVILLE TWP., OHIO 44077
S/L 20 NORTH SHORE ESTATES AT LAKE ERIE SHORES VOL. 50 PG. 5
PROBUILT HOMES

DATE
JUNE 12, 2012
SCALE
1" = 30'
JOB NO.
1107-020
SHEET
113
OF SHEETS