

B.M.*8 Sta. 37+74
Spike in roof 48" M.
32' to L. of R.
Elev. = 684.22


B.M.*9 Sta. 44+31
Spike in roof 24" M.
50' to L. of R.
Elev. = 689.19

B.M.*10 Sta. 51+56
Spike in roof 60" M.
36' to R. of R.
Elev. = 692.69

B.M.*11 Sta. 56+75
x on N.W. cor. store wall
28' to L. of R.
Elev. = 681.14

B.M.*12 Sta. 62+70
Spike in back side 48" M.
26' to R. of R.
Elev. = 687.02

Grade line shown is profile

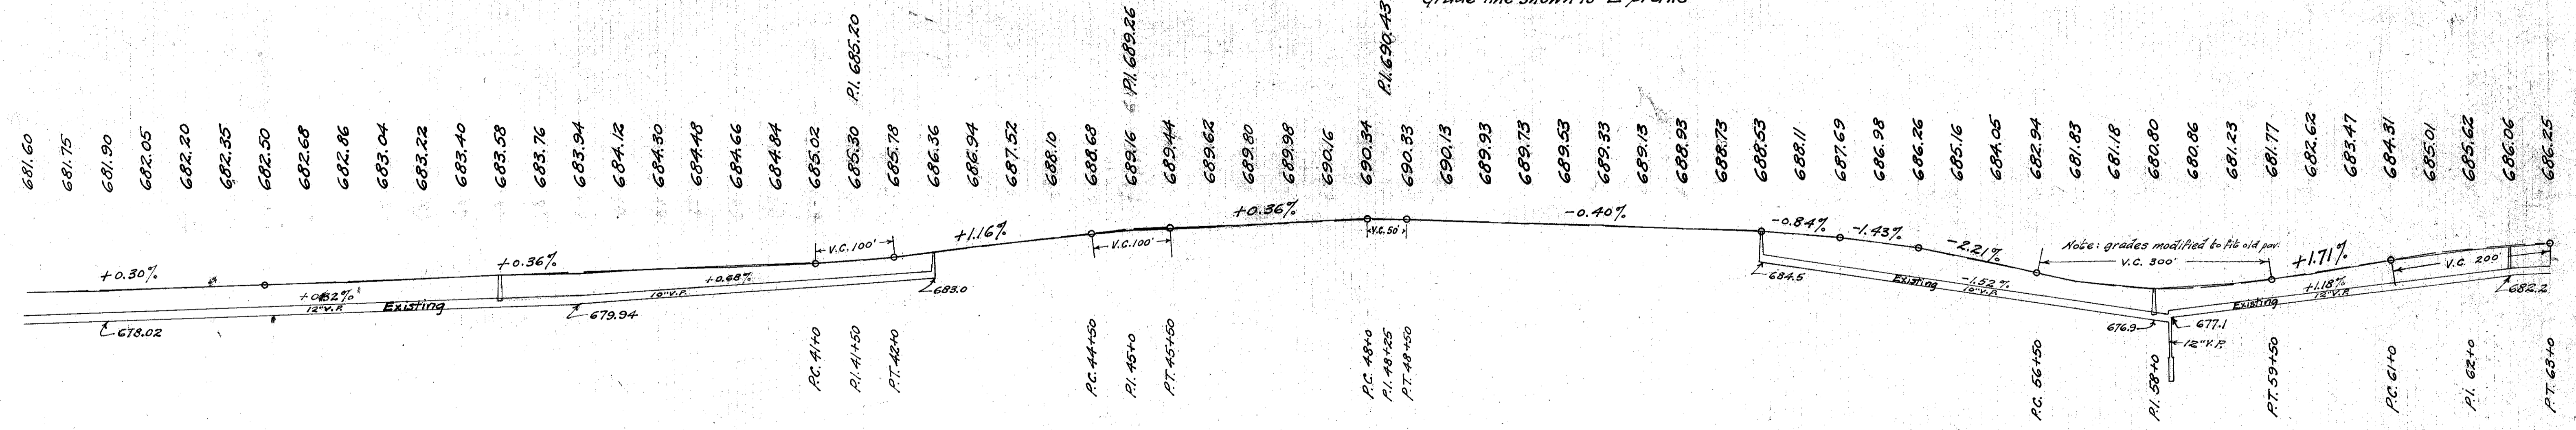

Station	Surface Elevation	Elevations
31	681.62	681.60
32	681.86	681.75
33	682.21	681.90
34	682.52	682.05
35	682.83	682.20
36	683.24	682.55
37	683.65	682.50
38	683.89	682.68
39	684.27	682.86
40	684.62	683.04
41	685.07	683.22
42	685.82	683.40
43	687.01	683.53
44	688.11	683.76
45	689.20	683.94
46	689.58	684.12
47	689.99	684.30
48	690.42	684.48
49	690.11	684.66
50	689.70	684.84
51	689.30	685.02
52	688.95	685.20
53	688.56	685.38
54	687.68	685.56
55	686.24	685.74
56	684.10	685.92
57	681.78	686.10
58	680.80	686.28
59	681.50	686.46
60	682.59	686.64
61	684.27	686.82
62	685.59	687.00
63	686.25	687.18

Exc. = 674.7 cu. yds.
Emb. +20% = 269.0 cu. yds.
Waste = 405.7 cu. yds.

Exc. = 957.5 cu. yds.
Emb. +20% = 241.0 cu. yds.
Waste = 716.5 cu. yds.

Exc. = 1252.2 cu. yds.
Emb. +20% = 264.4 cu. yds.
Waste = 987.8 cu. yds.