

### SIGNAL DISPLAY CHART

SIGNAL HEAD	ø1				ø2				FLASH
	R/W	CLEAR	R/W	CLEAR	R/W	CLEAR	R/W	CLEAR	
A	R	R	R	R	G	G	Y	R	R
B	R	R	R	R	G	G	Y	R	R
C	R	R	R	R	G	G	Y	R	R
D	R	R	R	R	G	G	Y	R	R
E	G	G	Y	R	R	R	R	R	Y
F	G	G	Y	R	R	R	R	R	Y
G	G	G	Y	R	R	R	R	R	Y
H	G	G	Y	R	R	R	R	R	Y
X-X	W	FD	D	D	D	D	D	D	DARK
Y-Y	D	D	D	D	W	FD	D	D	DARK

### LOOP DETECTOR CHART

LOOP #	SIZE	# TURNS	MODE	DELAY	AMP #	PHASE
L1	6' x 35'	2-4-2	PRESENCE	0	1	2
L2	6' x 35'	2-4-2	PRESENCE	8	2	2
L3	6' x 35'	2-4-2	PRESENCE	8	3	2
L4	6' x 6'	3	PRESENCE	0	4	SYSTEM
L5	6' x 6'	3	PRESENCE	0	5	SYSTEM
L6	6' x 6'	3	PRESENCE	0	6	SYSTEM
L7	6' x 6'	3	PRESENCE	0	7	SYSTEM


### COORDINATION TIMING

	DIAL 1	DIAL 2	DIAL 3
CYCLE LENGTH	80 SEC	90 SEC	
PHASE 1 SPLIT	74 %	67 %	
PHASE 2 SPLIT	26 %	33 %	
PERMISSIVE	15 %	15 %	
OFFSET	45 %	67 %	
TIME OF DAY SCHEDULE	ALL OTHER TIMES	3:00PM TO 6:30PM MON-SAT	


NOTES:

1. PHASE SPLITS SHALL INCLUDE ALL GREEN PLUS YELLOW & ALL RED
2. PERMISSIVES SHALL START AT THE ZERO POINT OF THE CYCLE
3. OFFSETS SHALL BE REFERENCED TO THE BEGINNING OF PHASE 1 YELLOW

### WIRING DIAGRAM

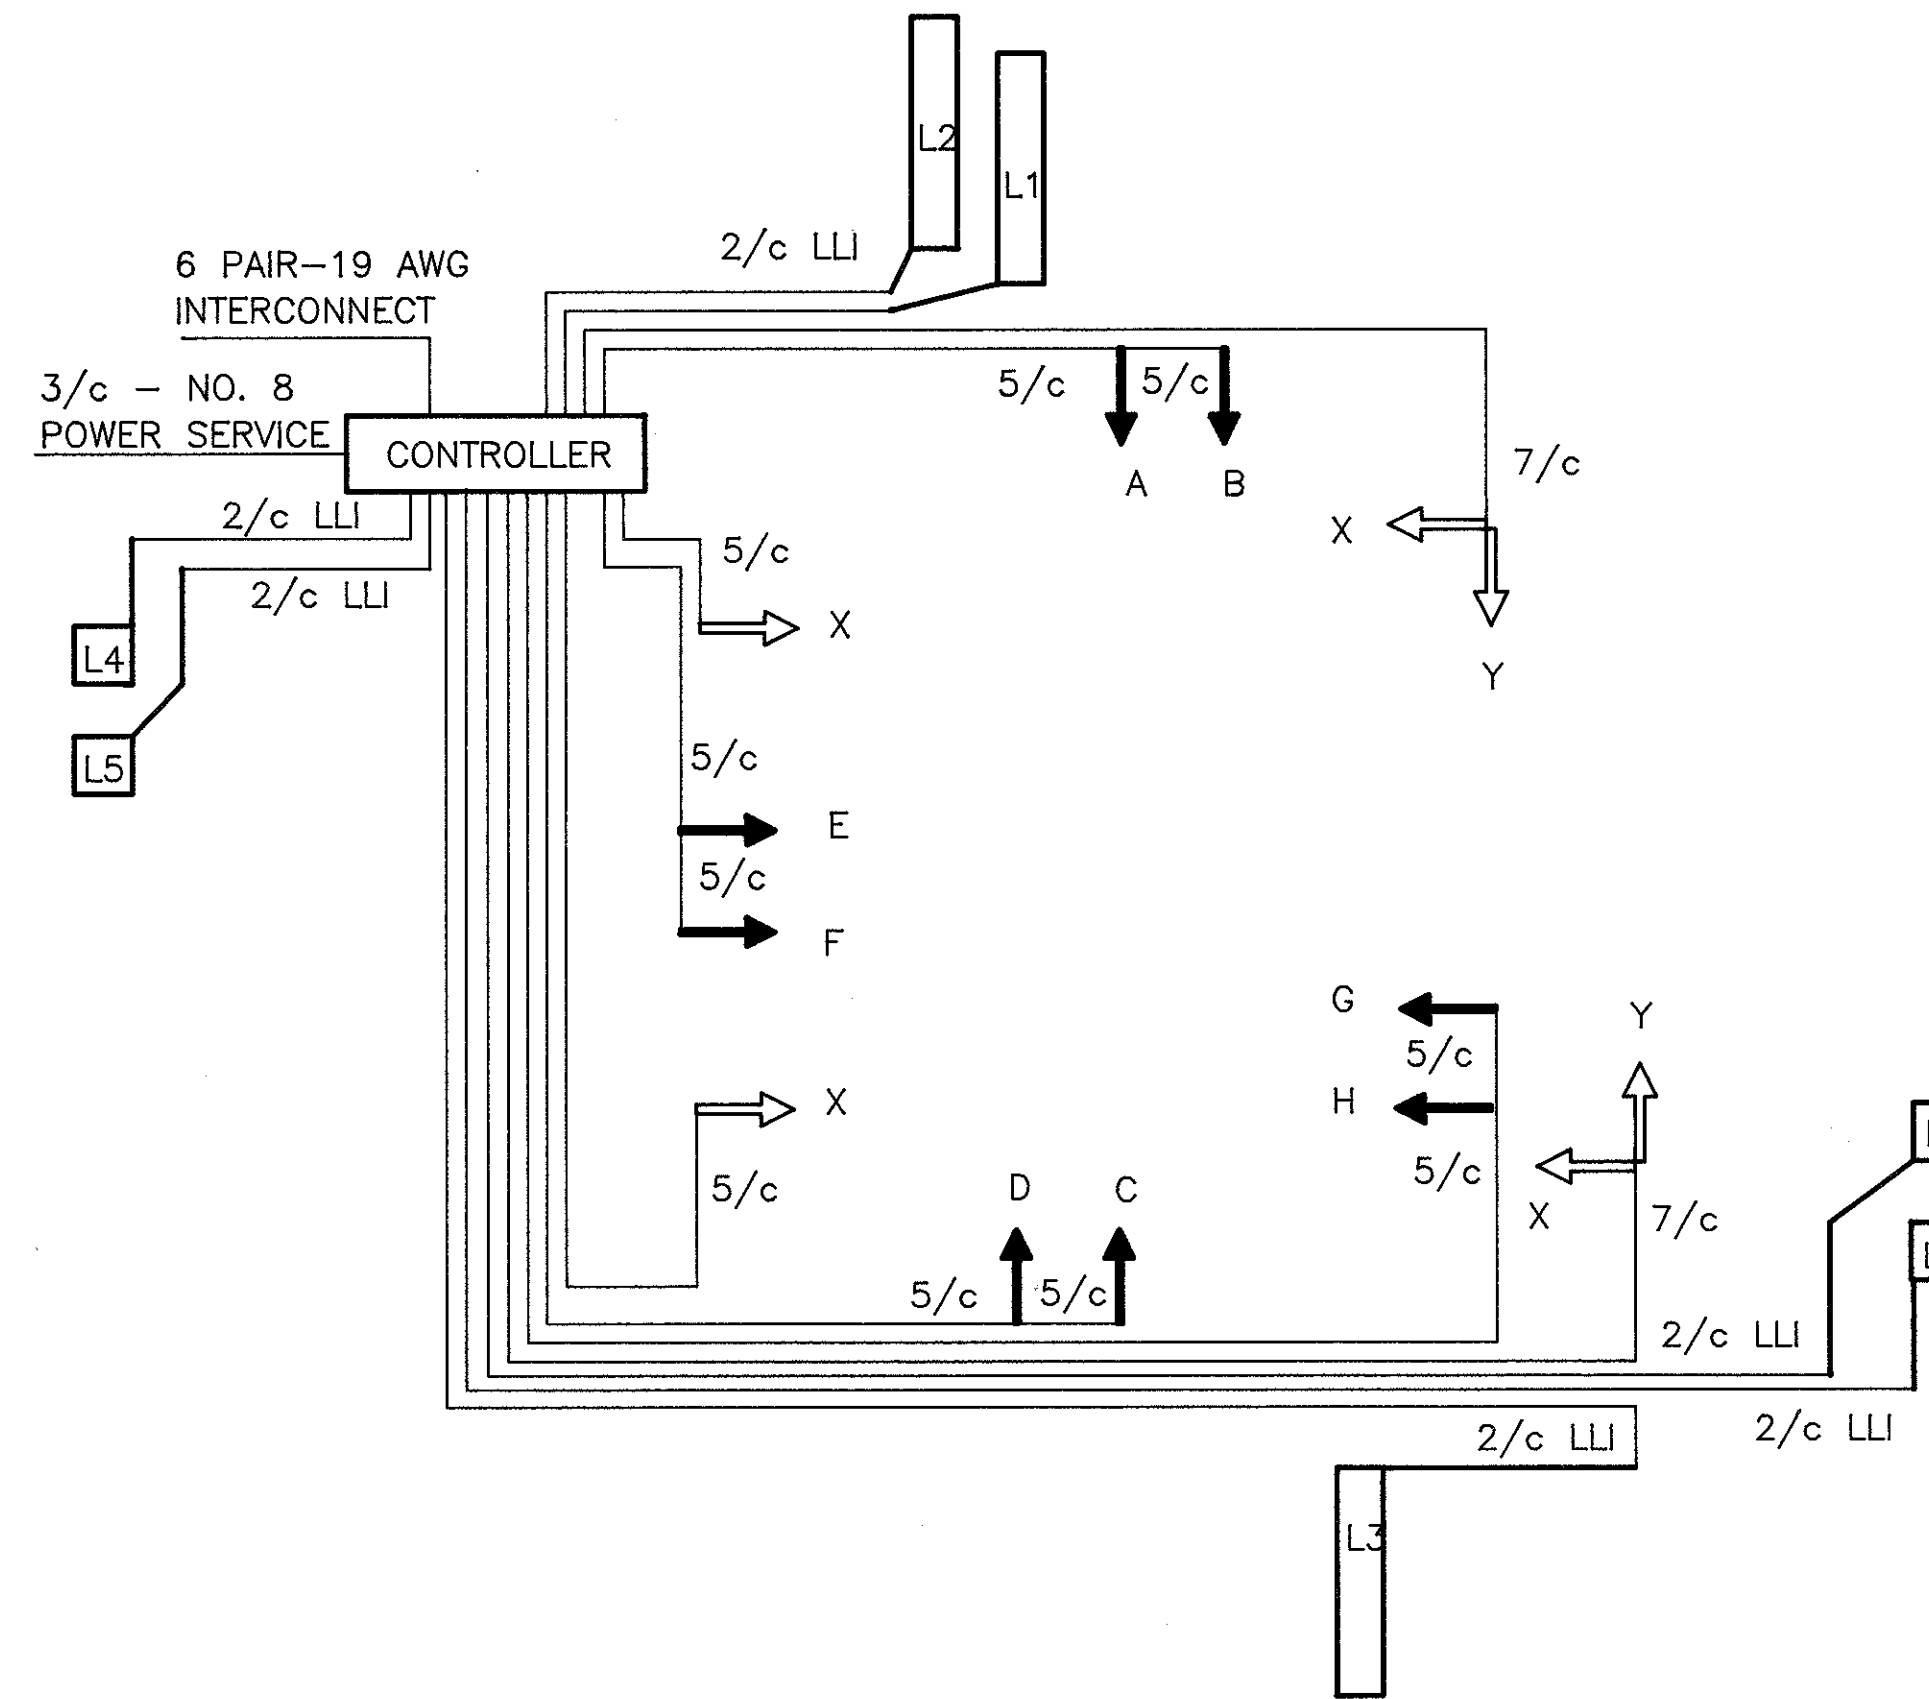

### PHASING DIAGRAM

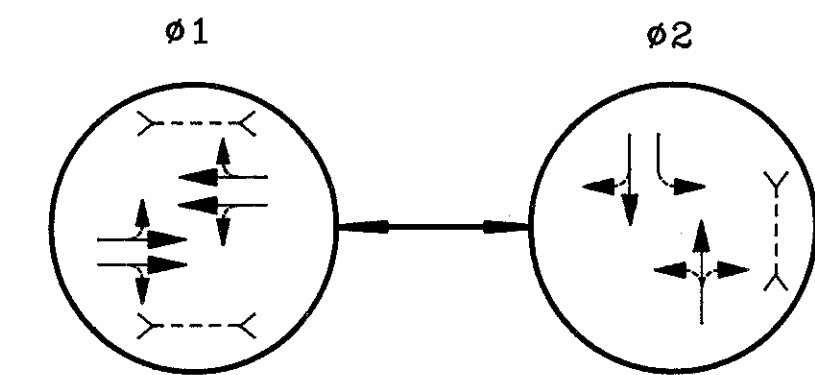

### SIGNAL TIMING

INTERVAL	ø1	ø2
INITIAL	20	10
PASSAGE	5.0	3.0
YELLOW	3.6	3.1
RED CLEAR	1.0	1.4
MAX I	23	20
MAX II	23	20
WALK	7	7
PED CLEAR	13	9
RECALL	PED	NONE
MEMORY	LOCK	LOCK

ITEM	TOTAL	UNIT	DESCRIPTION
625	5	EACH	GROUND ROD
625	5	EACH	PULLBOX, 713.08, 18", AS PER PLAN
625	133	LIN FT	CONDUIT 2", 713.04
625	209	LIN FT	CONDUIT 3", 713.04, AS PER PLAN
625	45	LIN FT	TRENCH
625	301	LIN FT	TRENCH IN PAVED AREAS, TYPE "B"
632	8	EACH	VEHICULAR SIGNAL HEAD, 3 SECT., 12" LENS, 1 WAY, AS PER PLAN
632	6	EACH	PEDESTRIAN SIGNAL HEAD, TYPE "D-2", AS PER PLAN
632	2	EACH	PEDESTRIAN PUSHBUTTON WITH R-73C-9 SIGN
632	5	EACH	LOOP DETECTOR UNIT, AS PER PLAN
632	2	EACH	LOOP DETECTOR UNIT, DELAY & EXTENSION TYPE, AS PER PLAN
632	520	LIN FT	LOOP DETECTOR PAVEMENT CUTTING
632	7.10	CU YD	CONCRETE FOR ANCHOR BASE FOUNDATIONS
632	1	EACH	SIGNAL SUPPORT, TYPE TC-81.20, DES. 1, 21' ARM
632	1	EACH	SIGNAL SUPPORT, TYPE TC-81.20, DES. 1, 24' ARM
632	1	EACH	SIGNAL SUPPORT, TYPE TC-81.20, DES. 2, 26' ARM
632	1	EACH	SIGNAL SUPPORT, TYPE TC-81.20, DES. 11, 43' ARM
632	2	EACH	CONDUIT RISER, 2" DIAMETER
632	724	LIN FT	SIGNAL CABLE, 5 CONDUCTOR, NO. 14 AWG
632	274	LIN FT	SIGNAL CABLE, 7 CONDUCTOR, NO. 14 AWG
632	1560	LIN FT	LOOP DETECTOR WIRE, TYPE E
632	527	LIN FT	LOOP DETECTOR LEAD-IN CABLE
632	28	LIN FT	POWER CABLE, 3 CONDUCTOR, NO. 8 AWG
632	1	EACH	POWER SERVICE
632	8	EACH	COVERING OF VEHICULAR SIGNAL HEADS
632	1	EACH	REMOVAL OF TRAFFIC SIGNAL INSTALLATION, AS PER PLAN
633	1	EACH	CONTROLLER, ACTUATED, 2 PHASE, SOLID-STATE DIGITAL MICROPROCESSOR, AS PER PLAN
633	1	EACH	COORDINATOR, MULTI-DIAL, SOLID-STATE, DIGITAL, MICROPROCESSOR, SECONDARY
633	0.99	CU YD	CONCRETE FOR CONTROLLER FOUNDATION
633	8.33	SQ FT	CONTROLLER WORK PAD

