
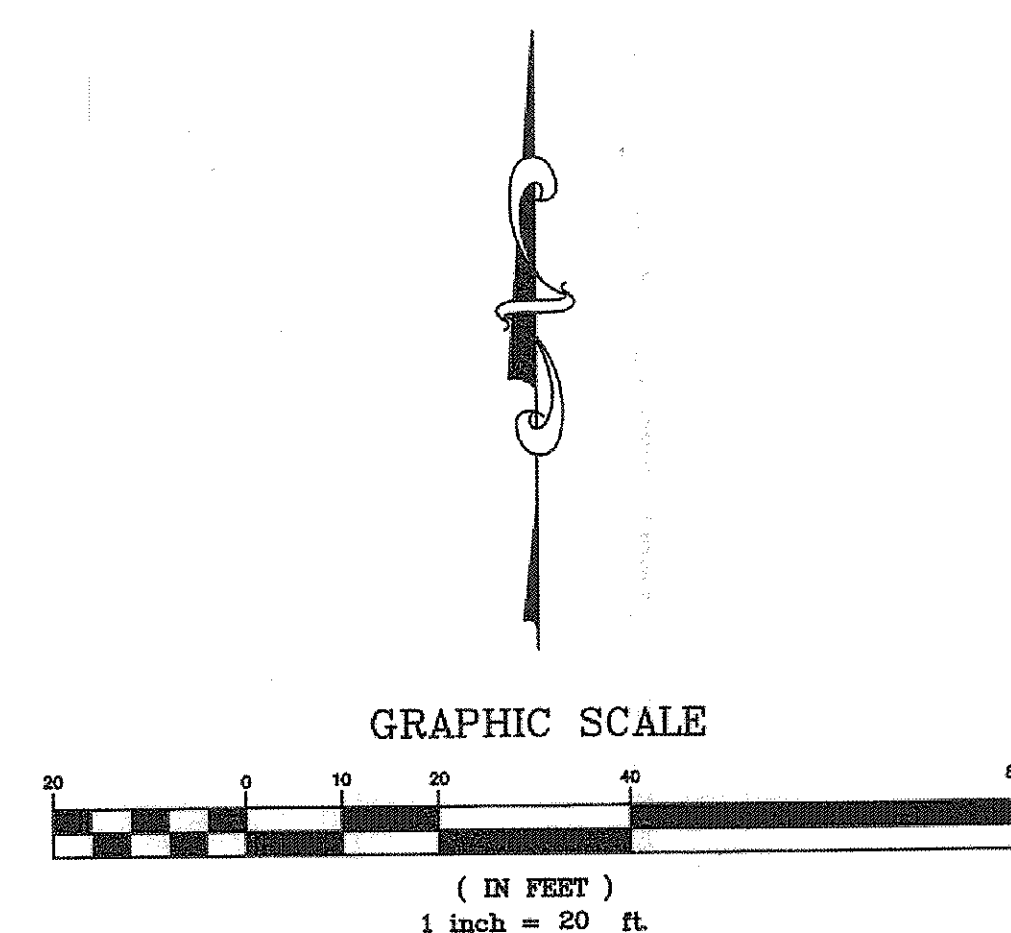
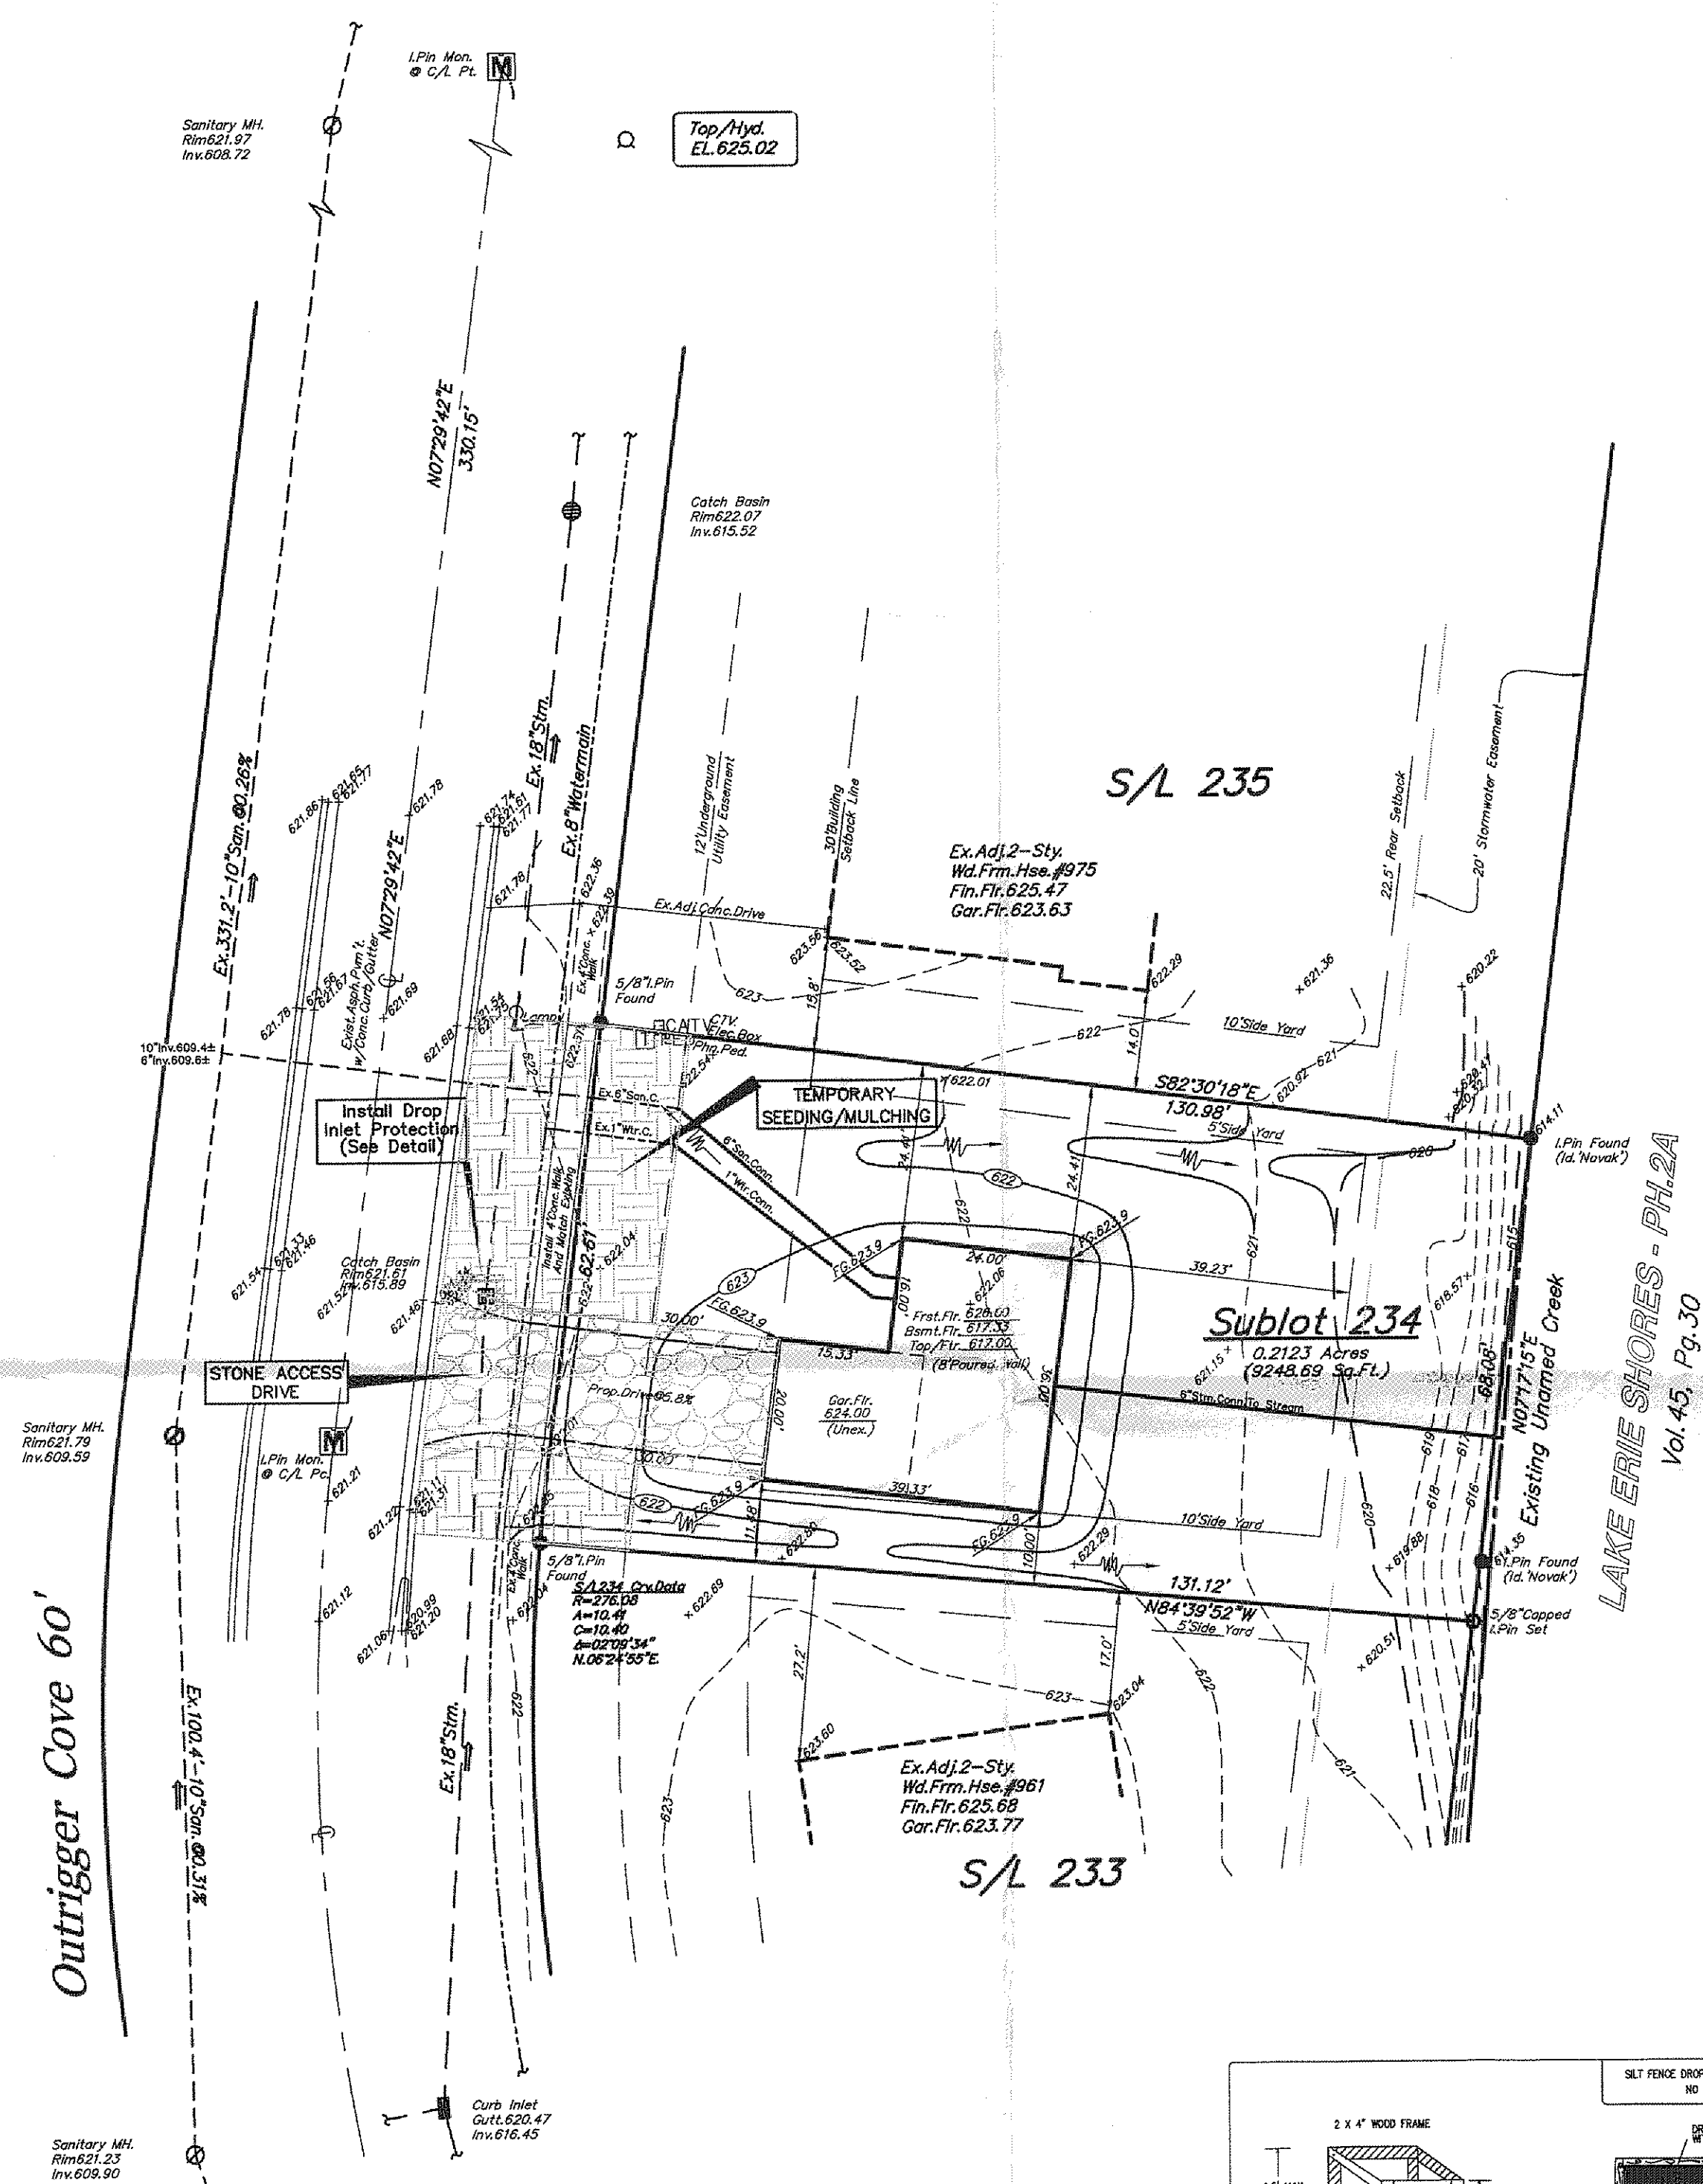
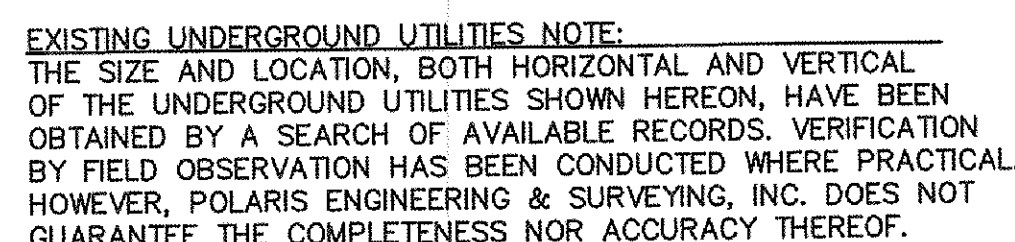


Note: other approved seed species may be substituted.

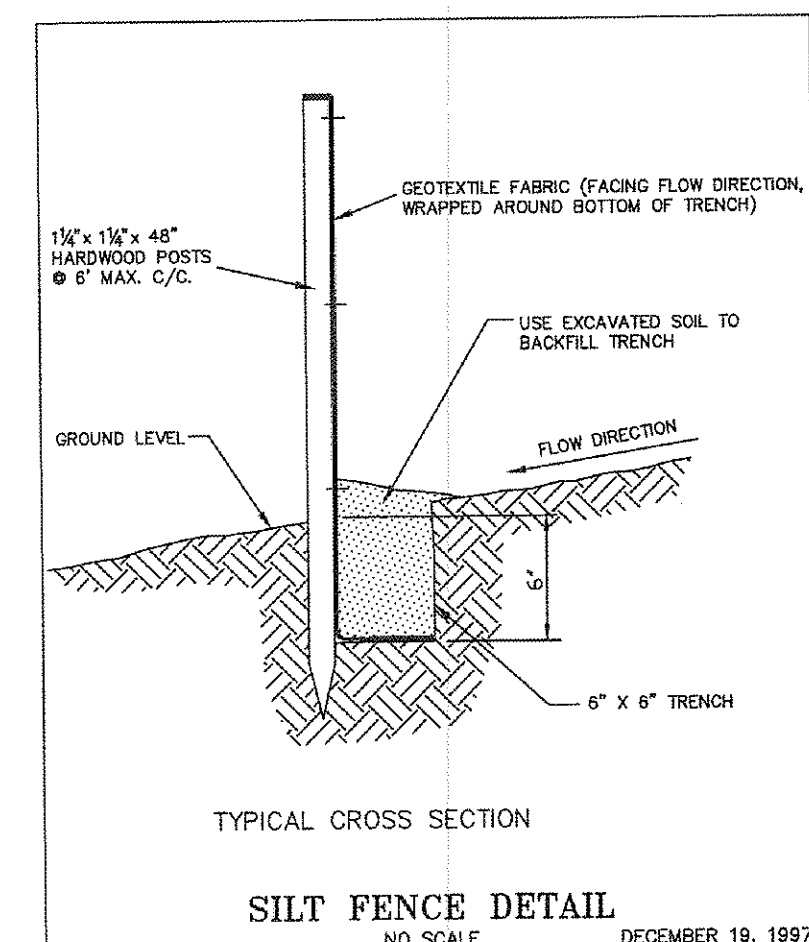

Elevations Used To Establish
Floor Elevations:


- Gar.Flr.+1'-0"=Top/Wall
- Top/Wall+11.5"(0.96')=Frst.Flr.
- Top Wall-8'-0"=Top/Ftr.
- Top/Ftr.+4"(0.33')=Bsmt.Flr.

ESTIMATED IMPERVIOUS AREA
HOUSE: 0.03 Ac.
DRIVE: 0.02 Ac.
TOTAL: 0.05 Ac.

NOTE:

- Contractor To Verify Location & Depth Of Laterals
- See Architect Plans For Complete House Dimensions;
- Drive Apron To Be 6" Thick Concrete With 3 Foot Flares;
- Sidewalk To Be 600T-12, 4" Thick (6" @ Driveway) With 3" Gravel Or Sandbase.
- Sump Pump To Discharge To Proposed Storm Connection.
- Proposed Downspouts To Outlet To Splashblocks.
- Splashblocks To Be Directed Toward The Front And Rear Of The Lot. (Not Toward Adjacent Properties)
- See Architect Plans For Downspout Locations.

-6" Storm Lateral To Installed By The Individual Home Builder And Shall Outlet Into Stream. Backflow Preventor Must Be Installed.

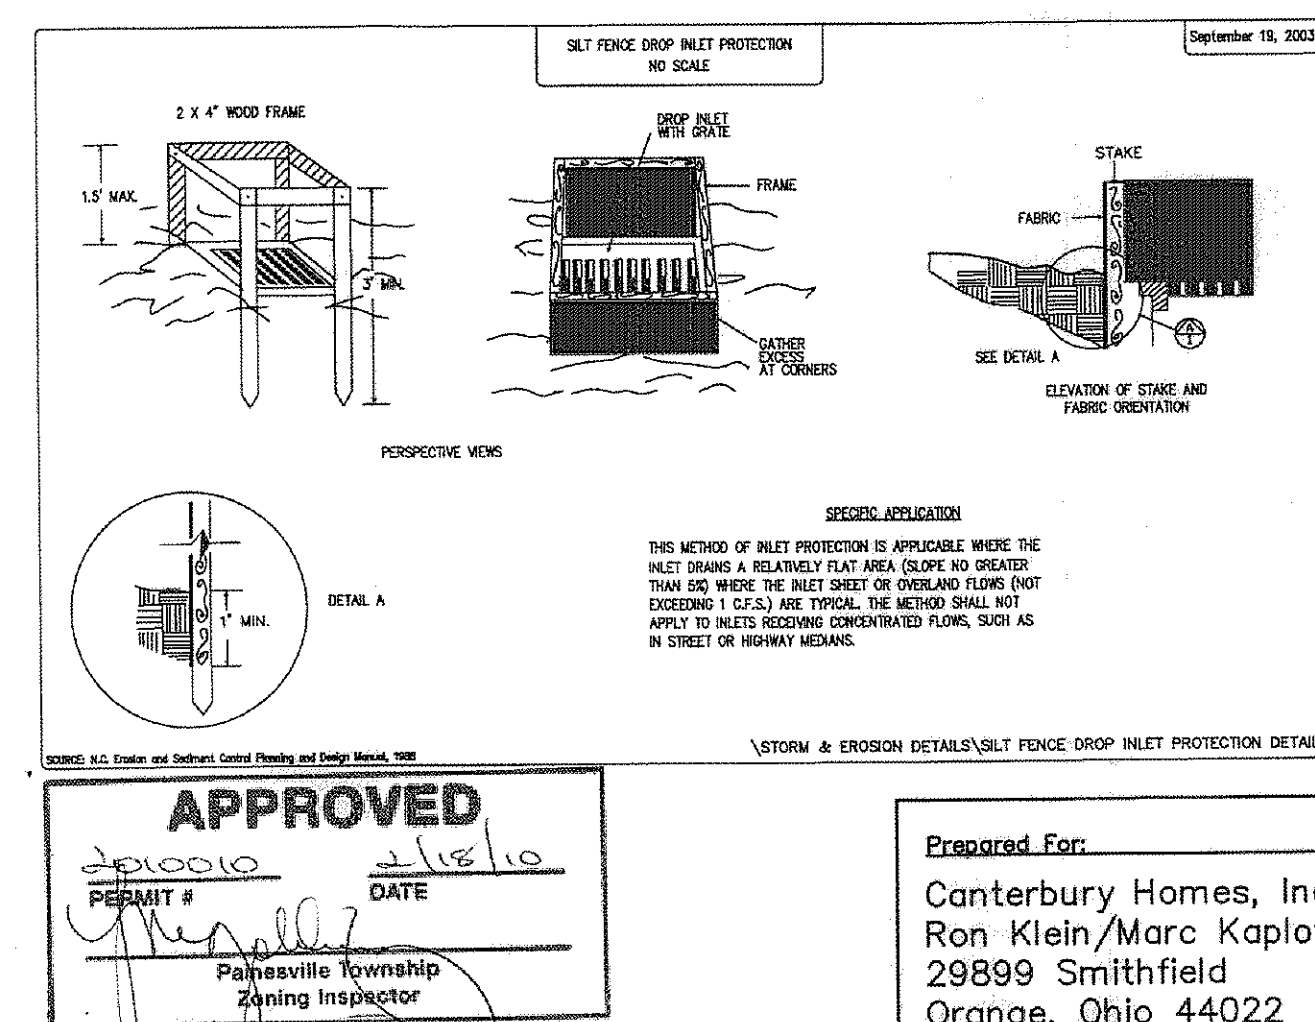

Erosion and Sediment Control Schedule

Ingress--Egress
A stone access drive complete with under lying geo-textile fabric (20 feet wide and 50 feet long) for ingress and egress at the site shall be installed. This drive shall be the only entrance and exit to the site.

Silt Fence
All silt fence shall be installed prior to any earthwork activities at the site in the locations shown on the site plan as well as along the front of any lot that slopes towards the street.

Temporary Seeding
Disturbed areas of the site that are to remain idle for more than twenty-one (21) days shall be properly seeded and straw mulched within seven (7) days of completion of initial grading.
Temporary seeding and mulching of a thirty (30) foot strip of the entire front of the lot shall be maintained on the site once initial grading is complete.

Stabilization of critical areas within fifty (50) feet of any stream or wetland shall be complete within two (2) days of the disturbance if the site is to remain inactive for longer than fourteen (14) days.

Mulching
Straw-mulch shall be applied at a rate of 1 bale per every ten (10) feet of curb, at a width of thirty (30) feet of the entire length of the lot. Wood chips may also be used but must be spread at a minimum depth of four inches over the thirty-foot width and must be accompanied by a properly installed silt fence.


Maintenance
Erosion and sediment controls shall be inspected every seven (7) days or within 24 hours of a 0.5" or greater rainfall event. Necessary repairs shall be made at this time.

Note:
All erosion and sediment control specifications, applications, and timetables are based on the descriptions and standards of The Ohio Department of Natural Resources "Rainwater and Land Development Manual" and can be found in the Lake County Erosion and Sediment Control Rules as adopted December 21, 1999.


The specified erosion and sediment control standards are general guidelines and shall not limit the right of the county to impose, at any time, additional, more stringent requirements. Nor shall the standards limit the right of the county to waive, in writing, individual requirements.

I, THE UNDERSIGNED, HEREBY CERTIFY THAT THIS TOPOGRAPHY, INDICATED BY 6", 1", OR 2" CONTOURS, AND ELEVATIONS SHOWN HEREON, REPRESENT AN ACTUAL FIELD SURVEY MADE BY ME ON THE 17th DAY OF AUGUST, 2009, AND THAT THE ELEVATIONS WERE TAKEN AT APPROPRIATE INTERVALS AND THAT AS OF THAT DATE, THEY EXISTED AS INDICATED HEREON.

Charles W. Szucs, P.S.8240



Site & Grade Hse. 2-12-10

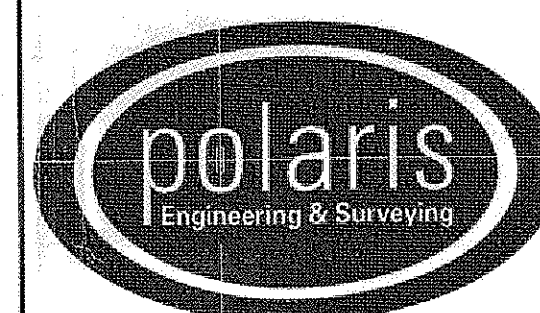

POLARIS ENGINEERING & SURVEYING, INC.
34600 CHARDON ROAD — SUITE D
WILLOUGHBY HILLS, OHIO 44094
(440) 944-4433 (440) 944-3722 (Fax)
www.polaris-es.com

DESIGN CERTIFICATION

THIS PLAN WAS PREPARED BY ME, AND IS CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

NAME _____ DATE _____

BENCHMARK:

B.M. = T.B.M Set On Top Of Hydrant
 Located As Noted
 Elevation As Noted

STATE SEAL

"AS-BUILT" CERTIFICATION

I HEREBY CERTIFY THAT THE CIRCLED INFORMATION IS EXISTING AS OBTAINED ON THE SITE _____ AND IS CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

NAME _____ DATE _____

SUBLOT 234
Lake Erie Shores Ph.3
(Volume 48, Page 4)
Painesville Twp. - Lake County - Ohio

CONTRACT No.
09084

DATE: 2-12-10

SCALE: HOR. $1"=20'$

FILENAME: Sublot234.dwg

Stormwater Management Plan
Approved as shown and/or noted
JAMES R. GILLS, P.E.
County Drainage Engineer
By LS Date 2/25/2010