

TYPICAL SECTIONS


TYPE T-71

SCALE: 3/8"=1'

FED. RD. DIVISION	STATE	PROJECT	
2	OHIO		

3
48

LAKE COUNTY
LAK. 306-5.56

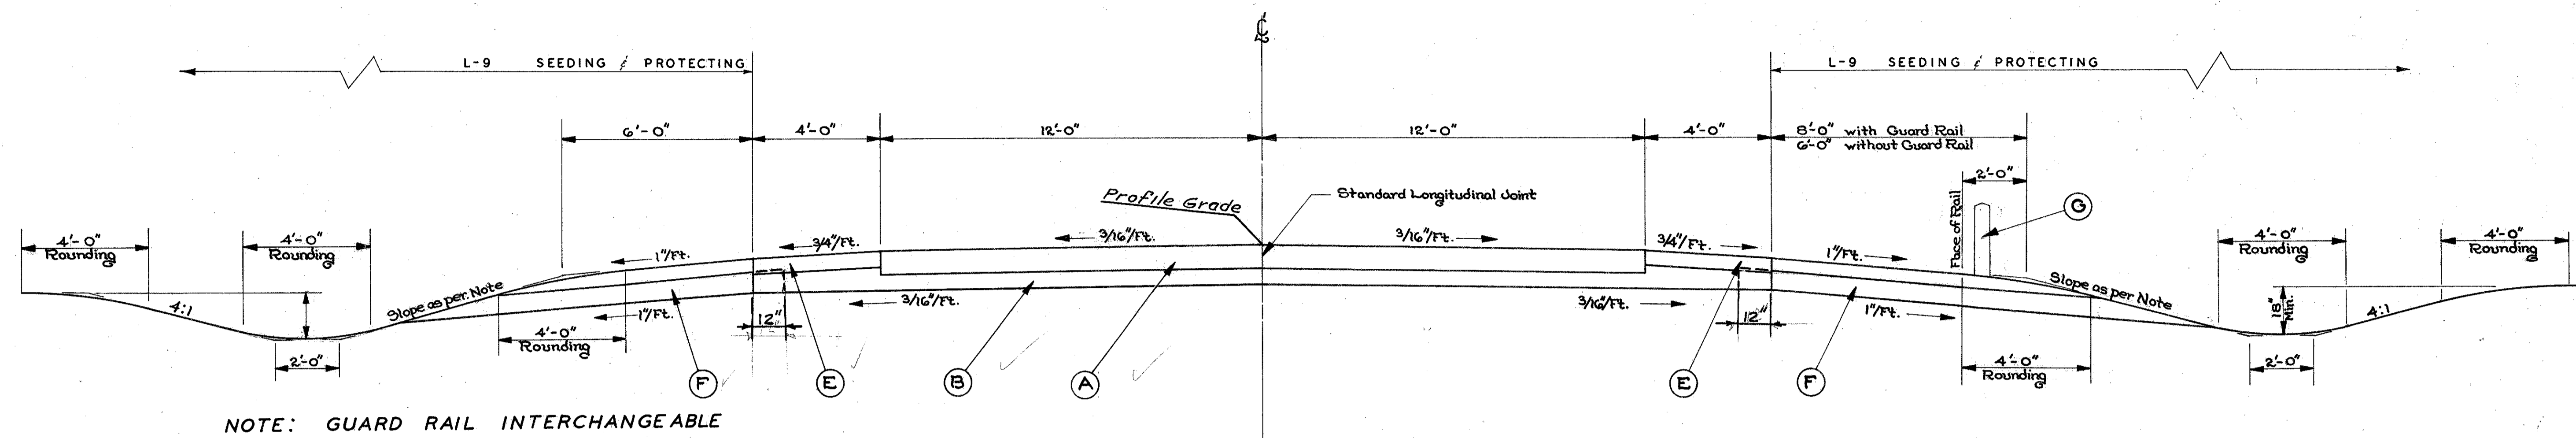

NOTE: GUARD RAIL INTERCHANGEABLE WITH EITHER SIDE OF ROADWAY

NORMAL SECTION

LIMITING STATIONS

STA. 13+20 TO STA. 20+26.63

STA. 22+82.11 TO STA. 26+25


STA. 31+75 TO STA. 40+50

NOTE:
FOR HEIGHT OF FILL UNDER 5' USE 4:1.
FOR HEIGHT OF FILL BETWEEN 5' AND 10' TRANSITION FROM 4:1 TO 2:1.
FOR HEIGHT OF FILL OVER 10' USE 2:1.
CROSS-SECTIONS SHALL GOVERN OVER TYPICAL SECTIONS WHERE VARIABLE CONDITIONS ARE ENCOUNTERED IN SLOPES.

LEGEND

- (A) T-71 9" Reinforced Portland Cement Concrete Pavement
- (B) I-22 6" Subbase Grading "A" or "B" As Per Plan
- ★ (E) I-18 6" Aggregate Base Course
- (F) I-9 Stone Underdrains, N# 2
- (C) I-15 Guard Rail, Steel Beam Type (Deep)

★ See Note in Proposal for additional stabilization with Calcium Chloride in upper 3" of this item.

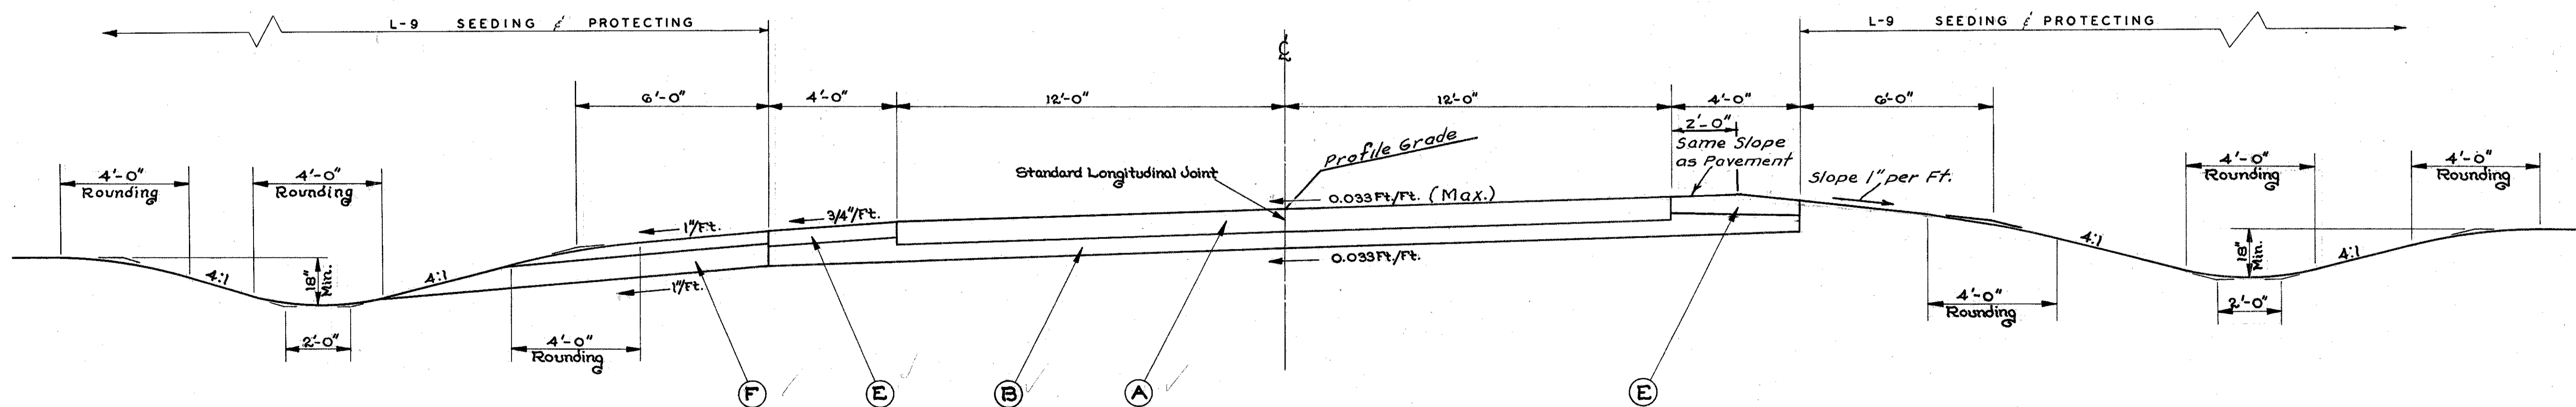

SUPERELEVATED SECTION

LIMITING STATIONS

STA. 26+25 TO STA. 31+75

NOTE:
FOR SUPERELEVATION TABLE
SEE SHEET NO. 19