


LAKE COUNTY
LAK-306-556

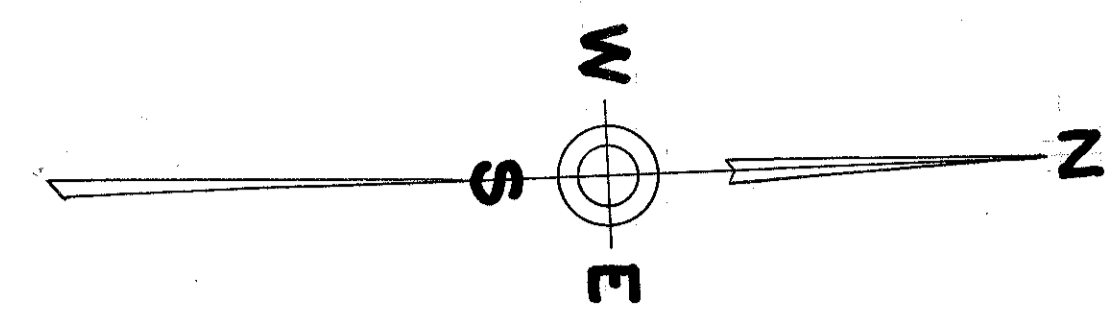

BEGIN SHEET STA 282+00

END SHEET STA 292+50

Ⓢ CURVE DATA
 PI STA 281+41.09
 $\Delta = 31^\circ 18' 20''$
 $D = 1^\circ 14' 10''$
 $R = 4635.16'$
 $T = 1298.76'$
 $L = 2532.58'$
 $E = 178.52'$
 PC STA 268+42.33

$R = 3819.72'$
 $R = 7639.44'$
 $R = 3437.35'$
 $R = 17,188.73'$


2 ST FR

1 ST FR

P.C.C. STA 289+57.82

P.C.C. STA 286+61.87


P.C.C. STA 292+00

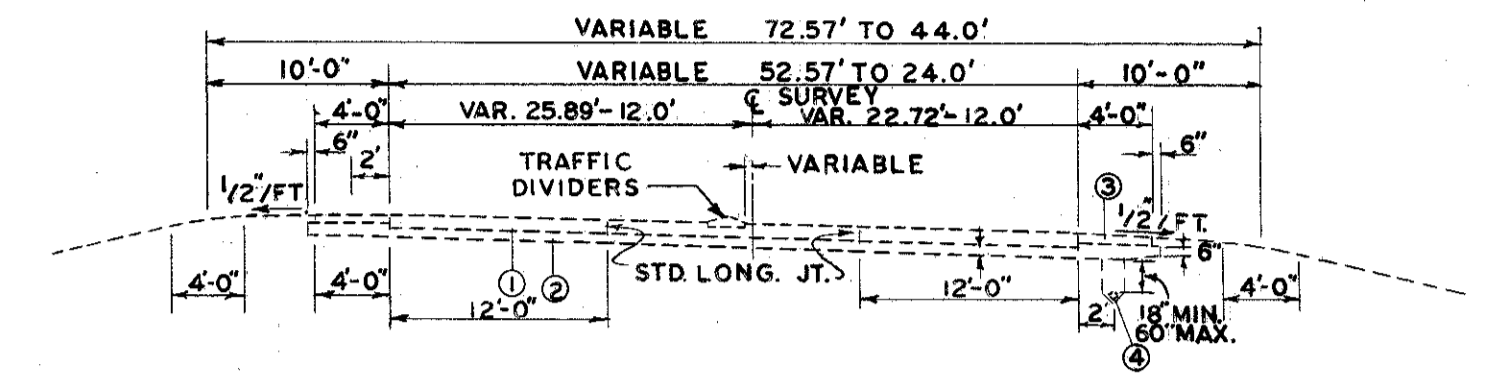

- LEGEND**
- ① 9" REINF. PORTLAND CEMENT CONCRETE PAVEMENT
 - ② SUBBASE (VARIABLE DEPTH)
 - ③ 5" STABILIZED CRUSHED AGGREGATE SHOULDERS & APPROACHES
 - ④ 6" PIPE UNDERDRAIN

TYPICAL SUPERELEVATED SECTION
 SCALE 3/32" = 1'

282 283 284 285 286 287 288 289 290 291 292

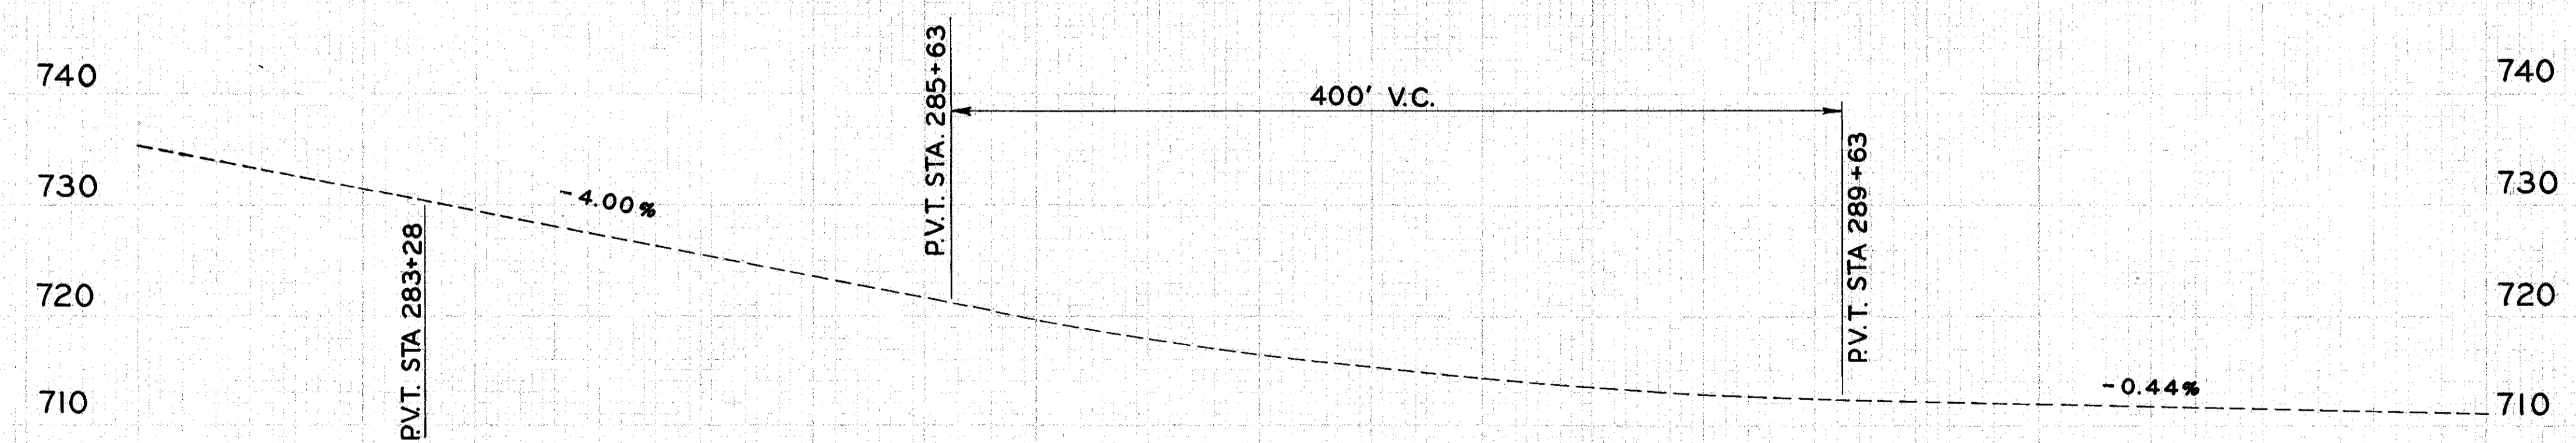

735.22 731.59 727.61 723.61 719.62 716.45 714.11 712.67 712.05 711.61 711.17

282 283 284 285 286 287 288 289 290 291 292