


TYPICAL SECTIONS JACKSON STREET TYPE T-71 REINFORCED CONCRETE PAV'T.

SCALE : 1/4" = 1'-0"

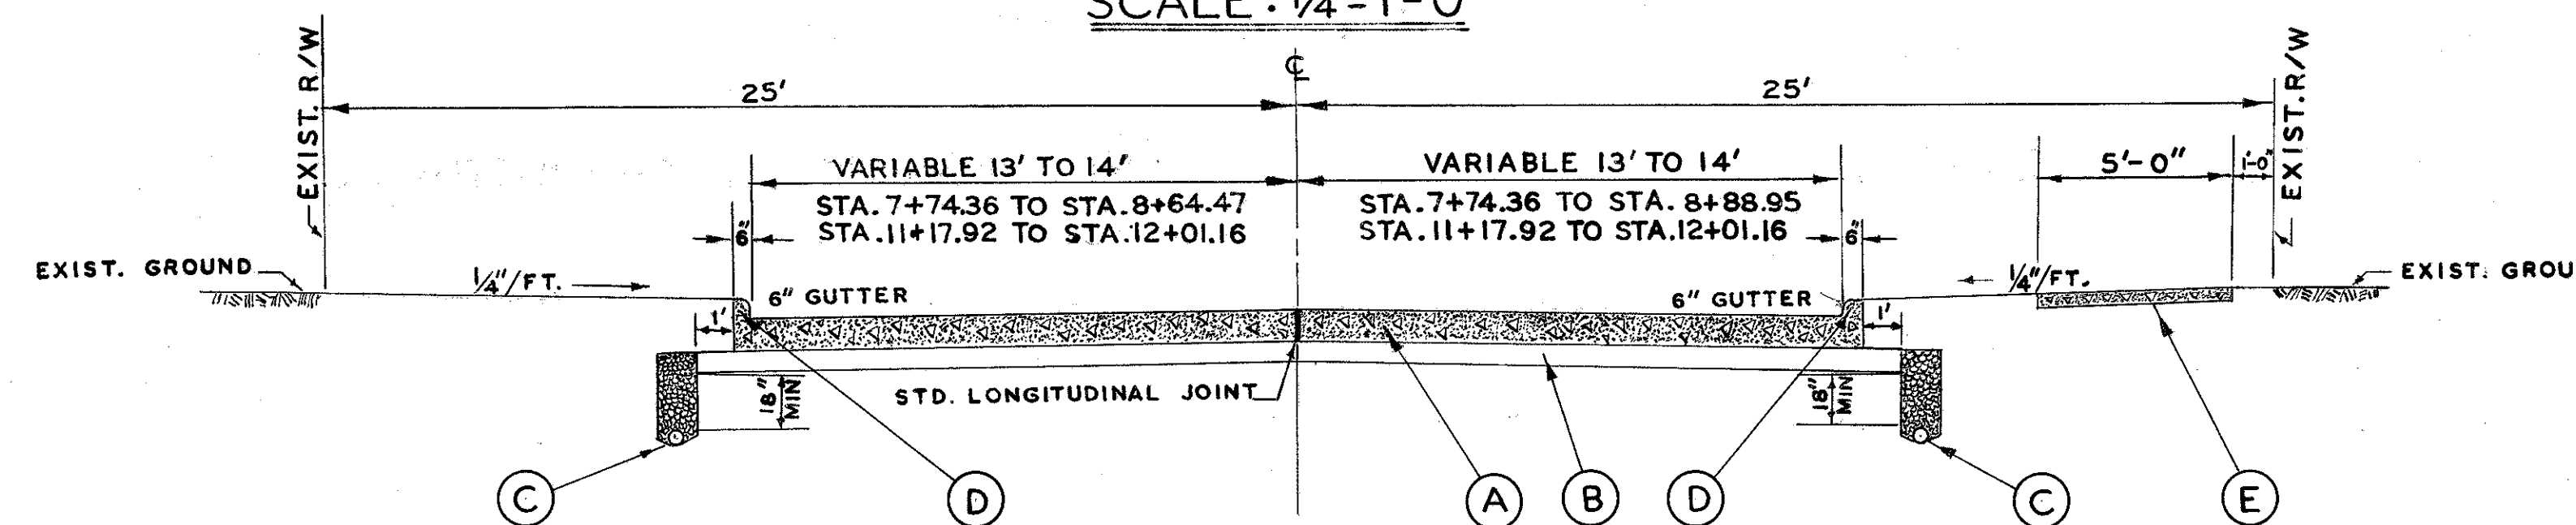


THIS TYPICAL SECTION IS FOR ILLUSTRATIVE PURPOSES
SEE EXTRA AREA DETAIL SH. NO. 129 STA. 7+71.34 TO STA. 8+62.21 & STA. 11+27.73 TO STA. 12+01.16
STRUCTURE LIMITS (INCLUDING APPROACH SLABS) STA. 8+62.21 TO STA. 11+27.73

LEGEND

- (A) 9" T-71 REINFORCED PORTLAND CEMENT CONCRETE PAV'T
- (B) 6" I-22 SUBBASE, GRADING "A" OR "B" (SEE GENERAL NOTE SH. NO. 7), AS PER PLAN
- (C) I-1 6" PIPE CLASS I-3
- (D) I-12 STANDARD CONCRETE CURB TYPE 2-A
- (E) 4" I-13 CONCRETE SIDEWALK

MENTOR AVE (U.S. 20) TYPE T-35 ASPHALTIC CONCRETE PAV'T.

SCALE : 1/4" = 1'-0"

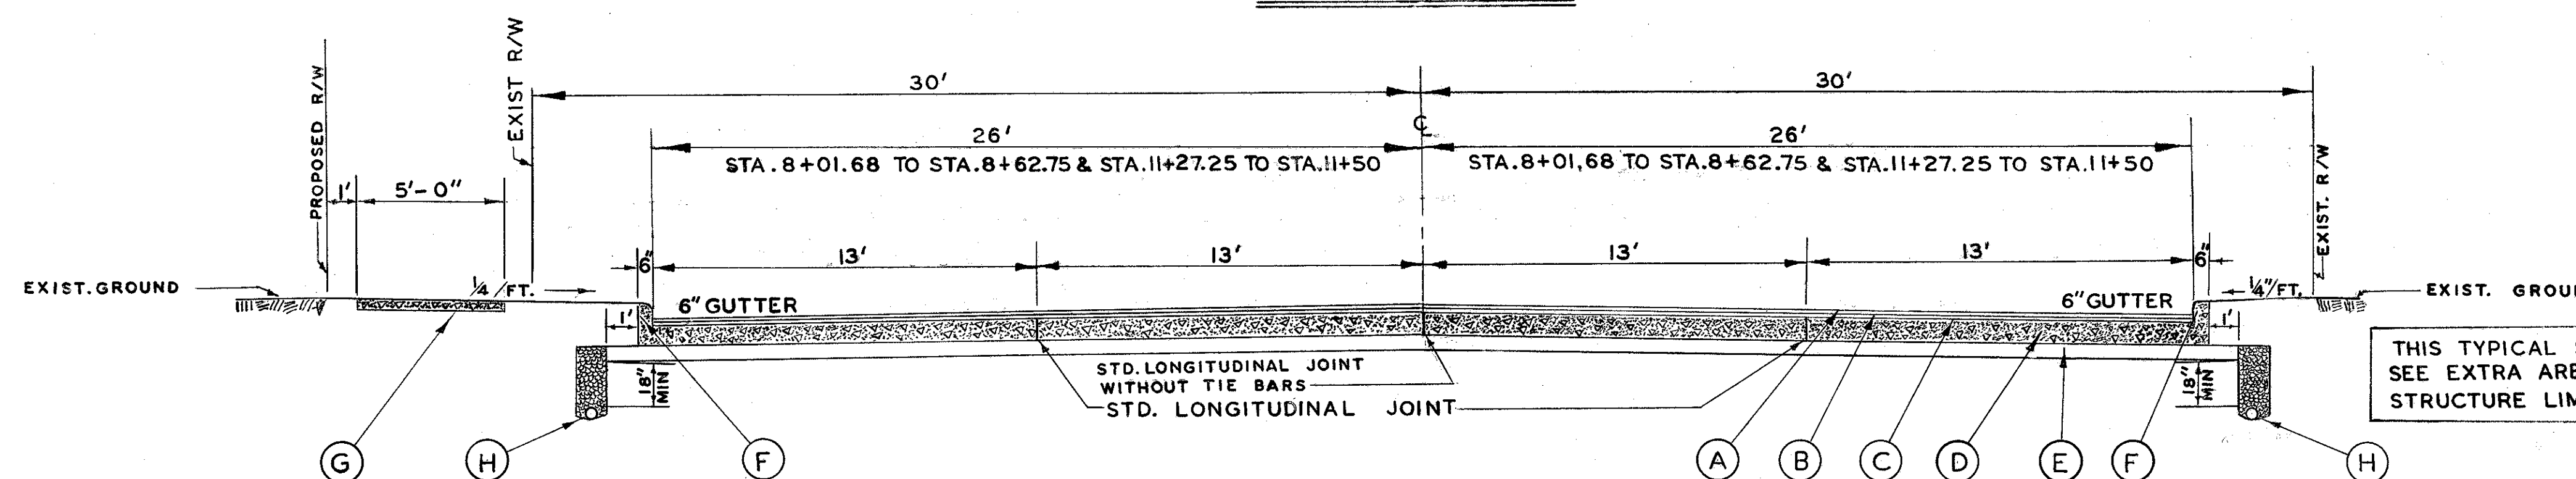

THIS TYPICAL SECTION IS FOR ILLUSTRATIVE PURPOSES
SEE EXTRA AREA DETAIL SH. NO. 129 STA. 8+01.68 TO STA. 8+62.75 & STA. 11+27.25 TO STA. 11+50
STRUCTURE LIMITS (INCLUDING APPROACH SLABS) STA. 8+62.75 TO STA. 11+27.25

LEGEND

- * (A) 1" T-35 ASPHALTIC CONCRETE SURFACE COURSE, TYPE C.(70-85)
- * (B) 1 1/2" B-35 ASPHALTIC CONCRETE LEVELING COURSE (70-85)
- (C) T-30 BITUMINOUS TACK COAT (0.10 GAL. PER SQ. YD.) (SEC. M-5.5 MS-2 OR RS-1 } AS PER SEC. T-30.02
(OR SEC. M-5.2 RC-1 OR RC-2)
- (D) 9" B-70 PORTLAND CEMENT CONCRETE BASE COURSE
- (E) 6" I-22 SUBBASE, GRADING "A" OR "B" (SEE GENERAL NOTE SH. NO. 7), AS PER PLAN
- (F) I-12 STANDARD CONCRETE CURB TYPE 2-B
- (G) 4" I-13 CONCRETE SIDEWALK
- (H) I-1 6" PIPE CLASS I-3

* THICKNESSES SHOWN ARE "DESIGNED" THICKNESSES AS DESCRIBED IN SECTIONS T-35.01 AND B-35.01.