

TYPICAL SECTION

MENTOR AVE.(U.S.20)


TYPE-35 ASPHALTIC CONCRETE PAV'T

SCALE : $\frac{3}{8}'' = 1'-0''$

| | | |
|-------------------|-------|---------|
| FED. RD. DIVISION | STATE | PROJECT |
| 2 | OHIO | |

6
204

LAKE COUNTY
LAK. 44-3.79

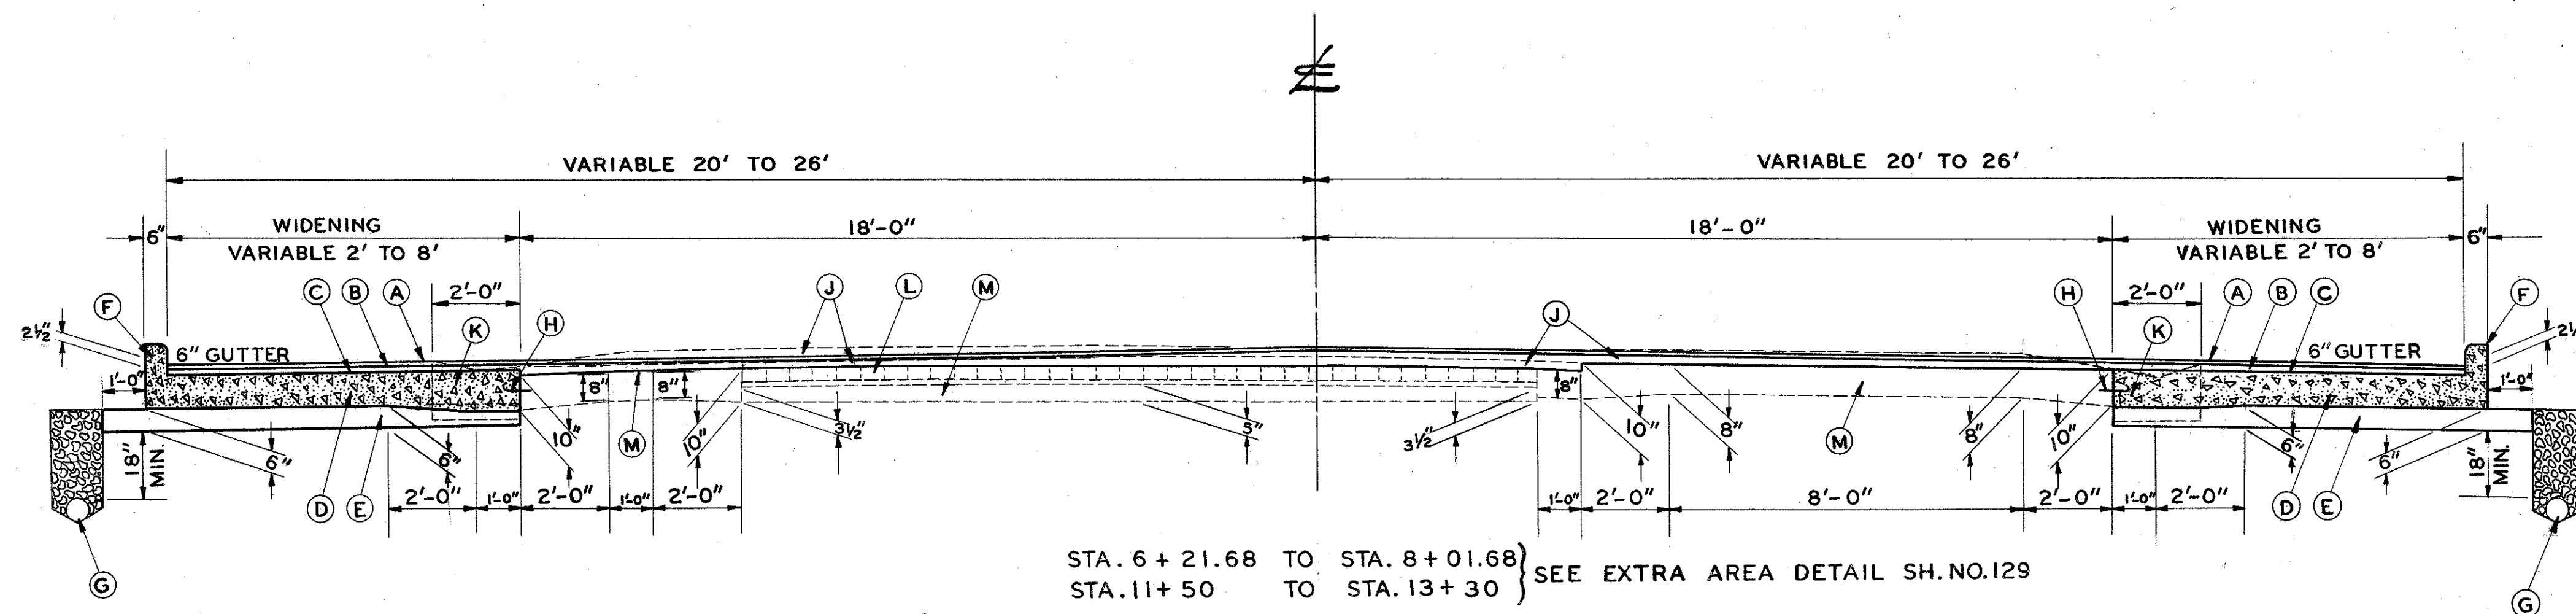

LEGEND

- * (A) 1" T-35 ASPHALTIC CONCRETE SURFACE COURSE, TYPE C (70-85)
- * (B) B-35 ASPHALTIC CONCRETE LEVELING COURSE (70-85) (VARIABLE DEPTH) ($1\frac{1}{2}''$ NOMINAL)
- (C) T-30 BITUMINOUS TACK COAT (0.10 GAL. PER SQ. YD.) { SEC. M-55, MS-2 OR RS-1 } AS PER SEC. T-30.02
(OR SEC. M-5.2, RC-1, OR RC-2)
- ** (D) B-70 PORTLAND CEMENT CONCRETE BASE COURSE, 9" MIN, VARIABLE DEPTH
- (E) I-22 SUBBASE, GRADING "A" OR "B" (SEE GENERAL NOTE SH. NO. 7), AS PER PLAN
- (F) I-12 CONCRETE CURB, TYPE 2-B
- (G) 6" I-1 PIPE, CLASS I-3
- (H) STANDARD EXPANSION BOLT JOINT
- (J) E-8 REMOVAL & DISPOSAL OF EXISTING ASPHALTIC CONCRETE WEARING COURSE
- (K) E-8 REMOVAL & DISPOSAL OF EXISTING CONCRETE GUTTER CURB (INCLUDING CONCRETE BASE)
- (L) EXISTING 4" BRICK ON $1\frac{1}{2}''$ SAND CUSHION
- (M) EXISTING CONCRETE BASE

* THICKNESSES SHOWN ARE "DESIGNED" THICKNESSES AS DESCRIBED IN SECTIONS T-35.01 AND B-35.01.
** COST OF PROVIDING AND PLACING ADDITIONAL THICKNESS OF B-70 AT EXISTING PAVEMENT EDGES SHALL BE INCLUDED IN THE UNIT PRICE BID FOR ITEM B-70 9" PORTLAND CEMENT CONCRETE PAVEMENT, AS PER PLAN.