



305 PAVEMENT REPLACEMENT DETAILS (PAVEMENT JOINTS OR CRACKS)

305 PAVEMENT REPLACEMENT DETAILS (PAVEMENT PANELS)

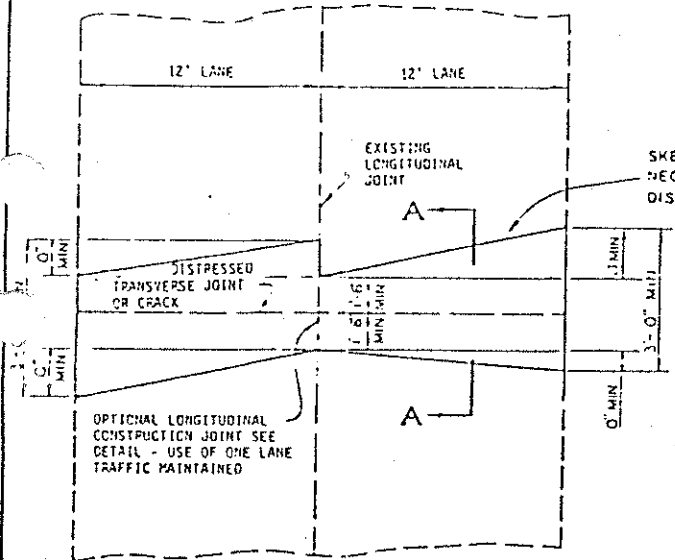

TWO LANE REPLACEMENT

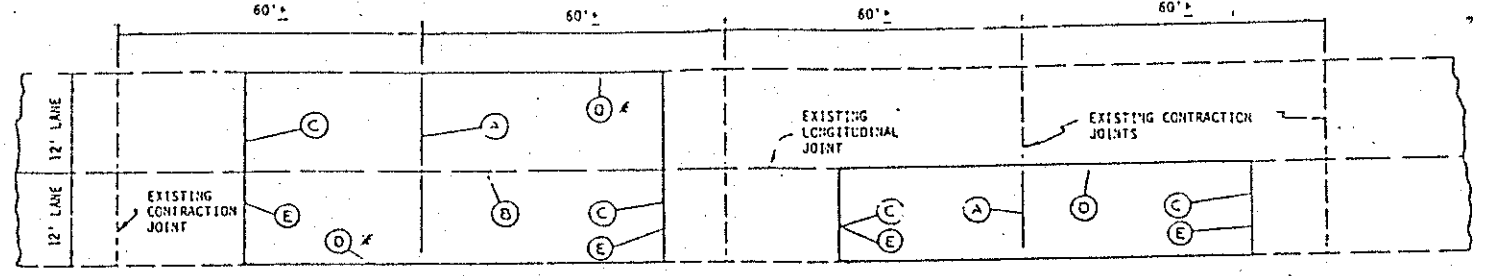


TYPICAL TWO LANE REPLACEMENT

TYPICAL ONE LANE REPLACEMENT


- Ⓐ STANDARD CONTRACTION JOINT AS PER STD DRAWG BP-4 - LOCATE ON STRAIGHT LINE EXTENSION OF EXISTING JOINT FOR SINGLE LANE PAVEMENT
- Ⓑ LONGITUDINAL JOINT - LONGITUDINAL CONSTRUCTION JOINT AS PER BP-3
- Ⓒ JOINT AND CRACK SEALING (SEE GENERAL NOTES)
- Ⓓ EXPANSION BOLT JOINT AS PER BP-3, AT 5'-0" INTERVALS
- Ⓔ DOWELLED CONSTRUCTION JOINT, SEE DETAIL

SEE SHEET No 6 FOR GENERAL NOTES PERTAINING TO PAVEMENT REMOVAL AND REPLACEMENT


* REQUIRED IF PAVEMENT REPLACEMENT IS ADJACENT TO EXISTING PAVEMENT

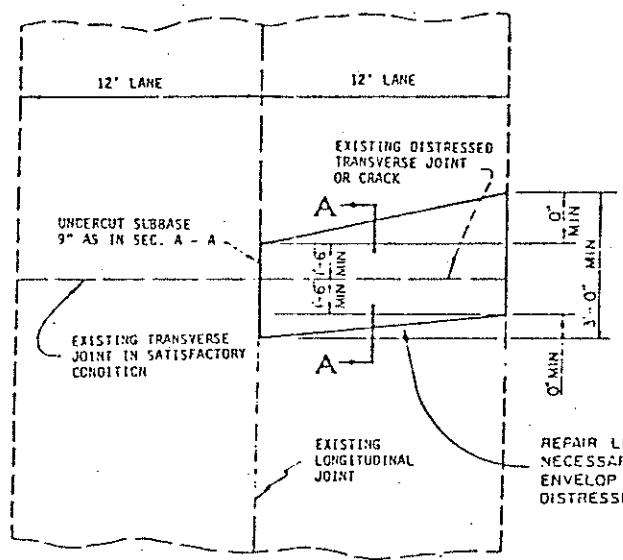


SINGLE LANE REPLACEMENT

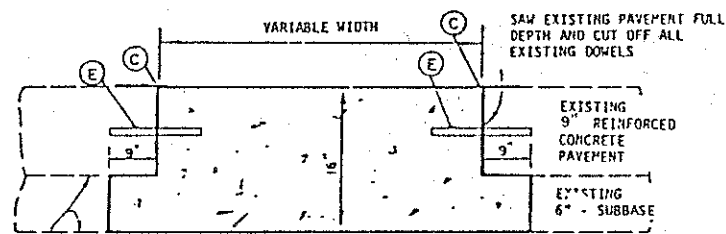

SECTION A-A

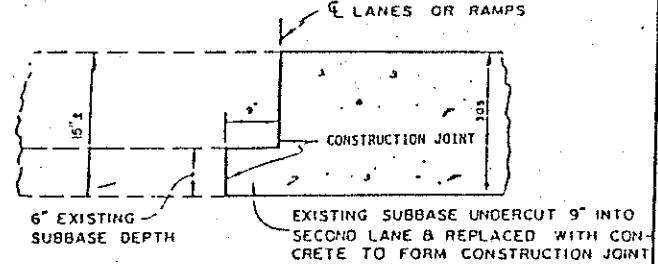

OPTIONAL LONGITUDINAL CONSTRUCTION JOINT FOR FULL WIDTH REPLACEMENT WHERE ONE LANE OF TRAFFIC MAINTAINED

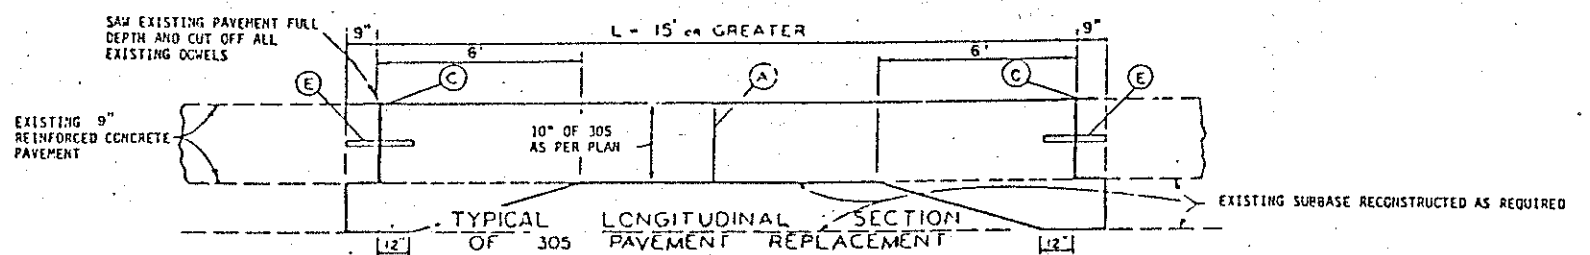


NOTE:

THIS WORK IS FOR THE REPAIRING OF THE LARGER SIZE (DETERIORATED) PAVEMENT AREAS OF EITHER SINGLE OR TWO LANE WIDTHS. THE LOCATIONS AND SIZES OF THESE REPAIRS SHALL BE AT THE DISCRETION OF THE ENGINEER.

THE COST OF RESURFACING, RECONSTRUCTING AND RECOMPACTING OF THE EXISTING SUBBASE AS NECESSARY SHALL BE INCLUDED IN THE UNIT PRICE BID FOR 305 10" PORTLAND CEMENT CONCRETE BASE, AS PER PLAN.

THIS DETAIL ALSO APPLIES TO THE REPAIR OF 9" REINFORCED CONCRETE. PAVEMENT SHALL BE FOR 10" - ITEM 305 FOR EITHER THICKNESS.

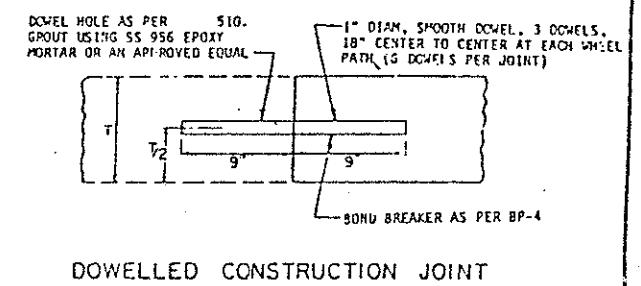

SEE SHEET No 6 FOR GENERAL NOTES PERTAINING TO PAVEMENT REMOVAL AND REPLACEMENT

NOTE:

THIS WORK IS FOR THE REPAIRING OF (DETERIORATED) TRANSVERSE PAVEMENT JOINTS AND OTHER SMALL (DETERIORATED) AREAS. THE LOCATION AND SIZES OF THE REPAIRS SHALL BE AT THE DISCRETION OF THE ENGINEER.

THE COST OF RESURFACING, RECONSTRUCTING AND RECOMPACTING OF THE EXISTING SUBBASE AS NECESSARY SHALL BE INCLUDED IN THE UNIT PRICE BID FOR 305, 16" PORTLAND CEMENT CONCRETE BASE, AS PER PLAN.

THIS DETAIL ALSO APPLIES TO THE REPAIR OF EXISTING 9" REINFORCED CONCRETE. PAVEMENT SHALL BE FOR 16" - ITEM 305 FOR EITHER THICKNESS.

ESTIMATED QUANTITIES	
ITEM 305 - 16" PORTLAND CEMENT CONCRETE BASE, AS PER PLAN 620 S.Y.	ITEM 305 - 10" PORTLAND CEMENT CONCRETE BASE, AS PER PLAN 4400 S.Y.
ITEM 202 - PAVEMENT REMOVED 4,840 S.Y.	
ITEM SPEC - PAVEMENT SAWING 7,260 L.F.	