

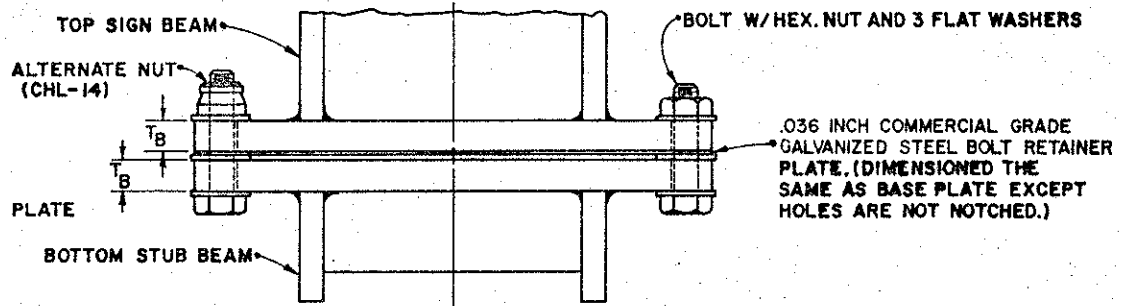
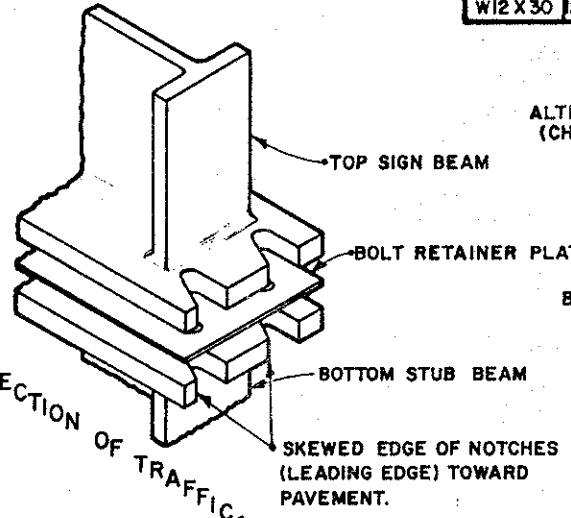


HINGE AND FUSE PLATE DIMENSIONS, INCHES

BEAM TYPE	BEAM SIZE	A _H	A _F	B	C	D	E	T	U	HOLE DIA.	BOLT SIZE	MIN. PRELOAD(lbs)
S4 X 7.7	4 X 2 5/8	4 1/8	3 5/8	2 5/8	9/16	1	1/2	3/16	2 1/2	9/16	1/2	10,000
W6 X 9	5 7/8 X 4	4 1/8	3 5/8	4	7/8	1	1/2	3/16	2 1/2	9/16	1/2	10,000
W10 X 12	9 7/8 X 4	6 1/8	5 3/8	4	7/8	1 1/2	3/4	3/16	3 1/2	13/16	3/4	25,000
W8 X 18	8 1/2 X 5 1/4	7 1/8	6 1/4	5 1/4	1 1/4	1 3/4	7/8	1/4	4	15/16	7/8	35,000
W10 X 22	10 1/8 X 5 3/4	8 1/8	7 1/8	5 3/4	1 1/2	2	1	5/16	4 1/2	1 1/16	1	46,000
W12 X 30	12 3/8 X 6 1/2	8 1/8	7 1/8	6 1/2	1 1/2	2	1	5/16	4 1/2	1 1/16	1	46,000

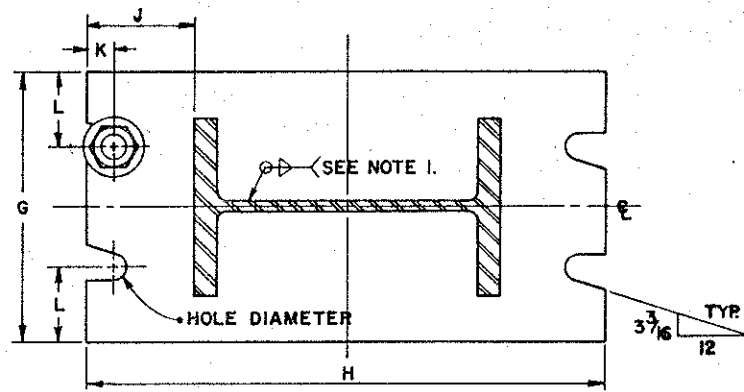

BASE PLATE ORIENTATION

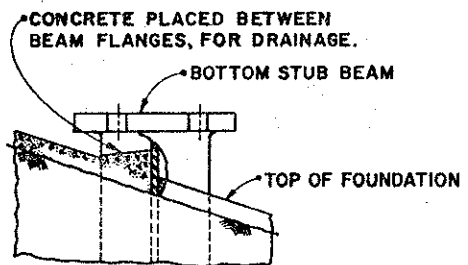

BASE PLATE

BEAM		FOUNDATIONS			BASE PLATE DIMENSIONS, INCHES								MAX. TORQUE in./lbs
TYPE	SIZE	DIA. (feet)	DEPTH (feet)	CONCRETE cu.yd./sq.	G	H	J	K	L	T _B	HOLE DIA.	BOLT SIZE	
S4 X 7.7	4 X 2 5/8	1.5	4	.27	4	8	2	1/2	1	3/4	9/16	1/2	200
W6 X 9	5 7/8 X 4	1.5	5	.33	5 1/2	10	2 1/16	1/2	1	3/4	9/16	1/2	200
W10 X 12	9 7/8 X 4	2.5	6	1.10	8	14 1/2	2 5/16	3/4	1 1/2	3/4	13/16	3/4	750
W8 X 18	8 1/2 X 5 1/4	2.5	6	1.10	8	14 1/2	3 1/4	3/4	1 1/2	1	13/16	3/4	750
W10 X 22	10 1/8 X 5 3/4	2.5	6.75	1.23	8	14 1/2	2 5/16	15/16	2	1	1 1/16	1	1325
W12 X 30	12 3/8 X 6 1/2	2.5	8.25	1.50	10	17	2 7/16	15/16	2	1 1/4	1 1/16	1	1325

NOTES

- BASE PLATE WELD SIZE SHALL BE EQUAL TO THE BEAM FLANGE AND WEB THICKNESS RESPECTIVELY, BUT NO LESS THAN 1/4" INCH IN EITHER INSTANCE.
- BEVELED WASHERS SHALL BE USED WITH THE S4 X 7.7 BEAM AND SHALL BE MALLEABLE IRON CONFORMING WITH ASTM A47 GRADE 35018.
- FUSE AND HINGE PLATE CONNECTIONS SHALL BE TIGHTENED IN THE SHOP FOLLOWING A METHOD APPROVED BY THE ENGINEER TO PRODUCE THE MINIMUM BOLT PRELOAD SPECIFIED.
- THE FOLLOWING PROCEDURE SHALL BE USED IN ASSEMBLING THE BREAKAWAY BASE PLATE:
AFTER ALL BOLTS, WASHERS, STANDARD NUTS AND BOLT RETAINER PLATE ARE IN PLACE, TIGHTEN ALL STANDARD NUTS SNUGLY WITH A 12" WRENCH. LOOSEN EACH BOLT IN TURN AND RETIGHTEN IN A SYSTEMATIC MANNER TO THE SPECIFIED MAXIMUM TORQUE. WRENCHES SHALL BE CALIBRATED AT LEAST ONCE EACH WORKING DAY FOR EACH BOLT DIAMETER BEING TORQUED. BURR THREADS AT JUNCTION WITH NUT USING A CENTER PUNCH.
- IN LIEU OF THE STANDARD NUTS AND PROCEDURES OUTLINED IN 3 AND 4 ABOVE, THE SUPPORTS MAY BE ASSEMBLED USING TORQUE LIMITING NUTS. EACH NUT SHALL BE TIGHTENED WITH SUFFICIENT TORQUE APPLIED UNTIL THE UPPER WRENCHING SURFACE HAS SHEARED AWAY FROM THE STRUCTURAL BODY OF THE NUT. FUSE AND HINGE PLATES SHALL BE SHOP ASSEMBLED FOLLOWING THIS PROCEDURE. THE NUTS USED SHALL BE AS MANUFACTURED BY HI-SHEAR CORP., TORRANCE CALIFORNIA; VOI SHAN INDUSTRIES - CULVER CITY, CALIFORNIA; STANDARD PRESSED STEEL - JENKINTOWN, PENNSYLVANIA OR APPROVED EQUAL. THE TORQUE LIMITING NUT PART NUMBER CHL-14 SHALL BE USED FOR THE BASE PLATE, CHL-II FOR THE FUSE AND HINGE PLATES.

ALL ITEMS SHALL CONFORM TO C & M SPECIFICATIONS 630 AND 730, UNLESS OTHERWISE SPECIFIED.

BUREAU OF DESIGN SERVICES DIVISION OF HIGHWAYS OHIO DEPARTMENT OF TRANSPORTATION	
TRAFFIC CONTROL	DATE
STRUCTURAL BEAM	8/19/77
SIGN SUPPORTS	3/26/79
STANDARD CONSTRUCTION DRAWING	12/23/81
TC-41.10	
APPROVED: <i>E. J. [Signature]</i> Engineer of Design Services	