
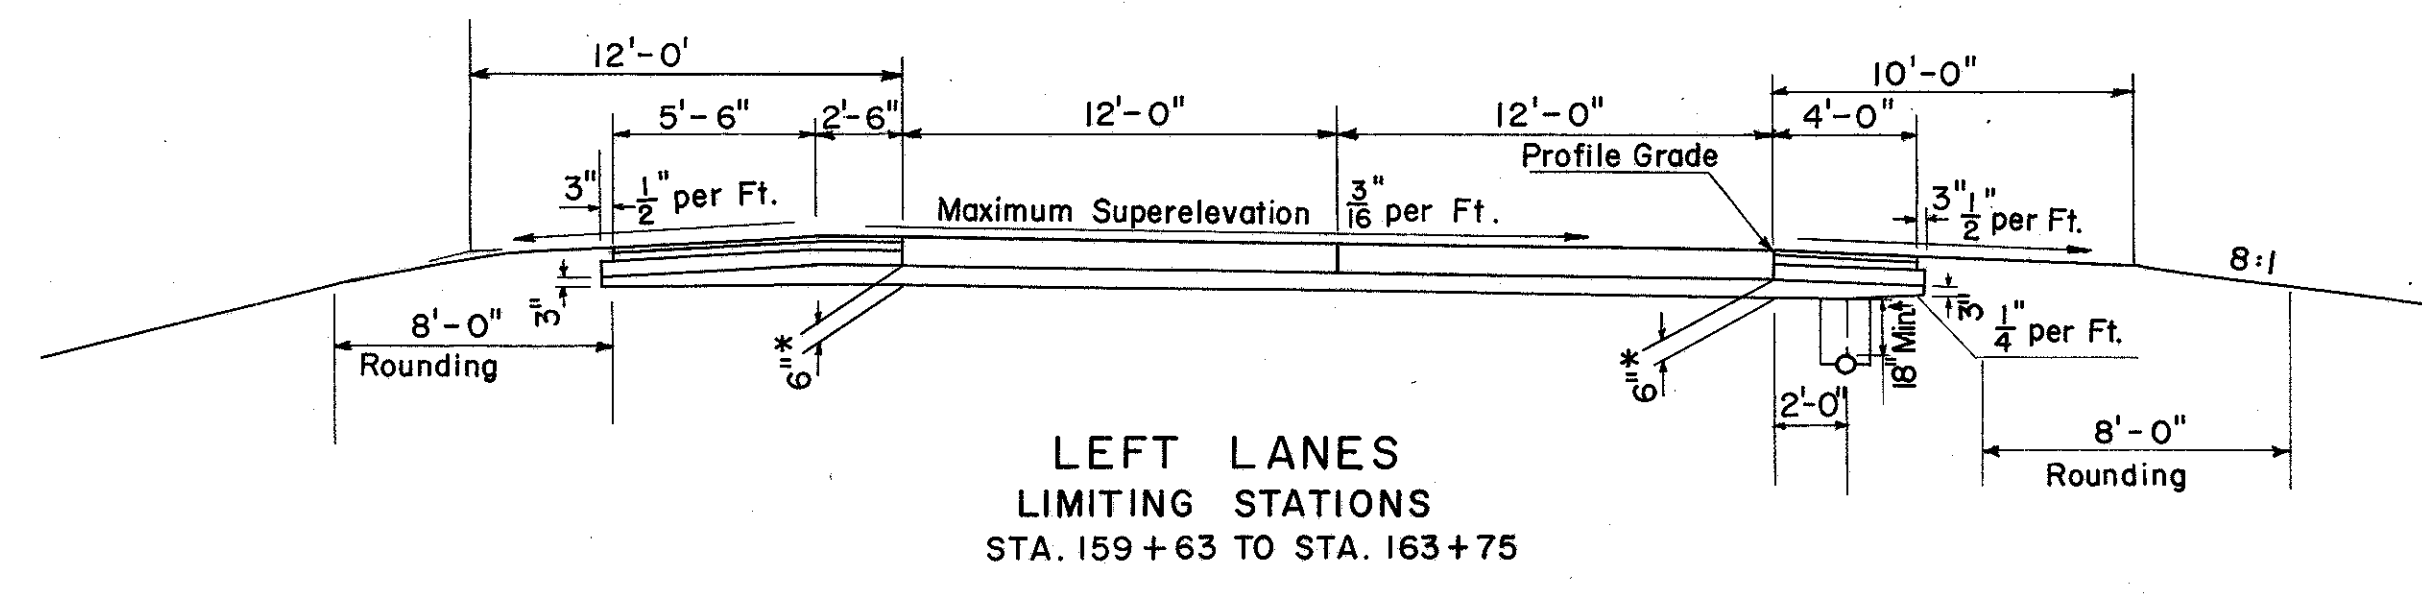
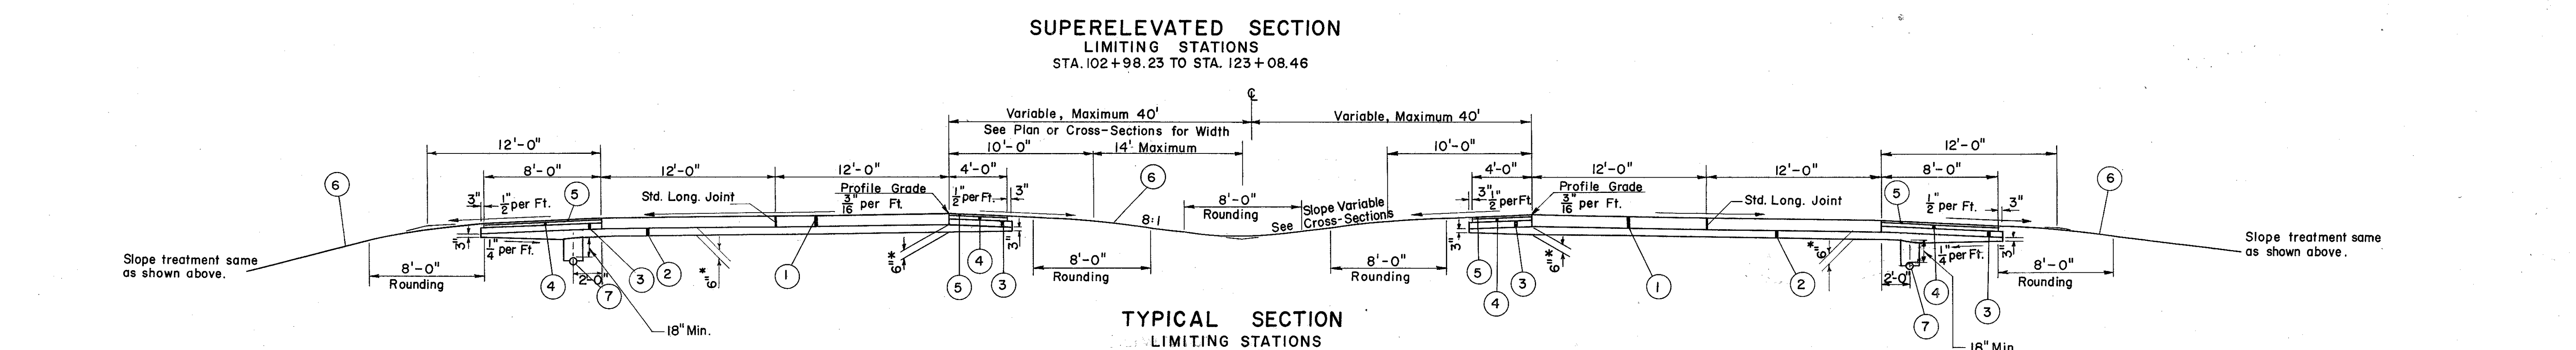
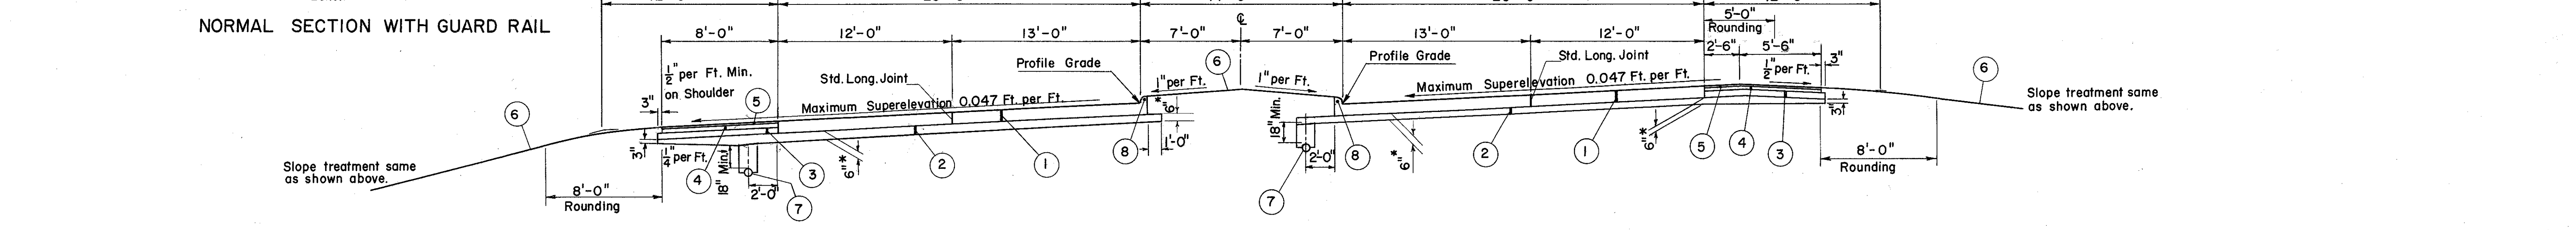
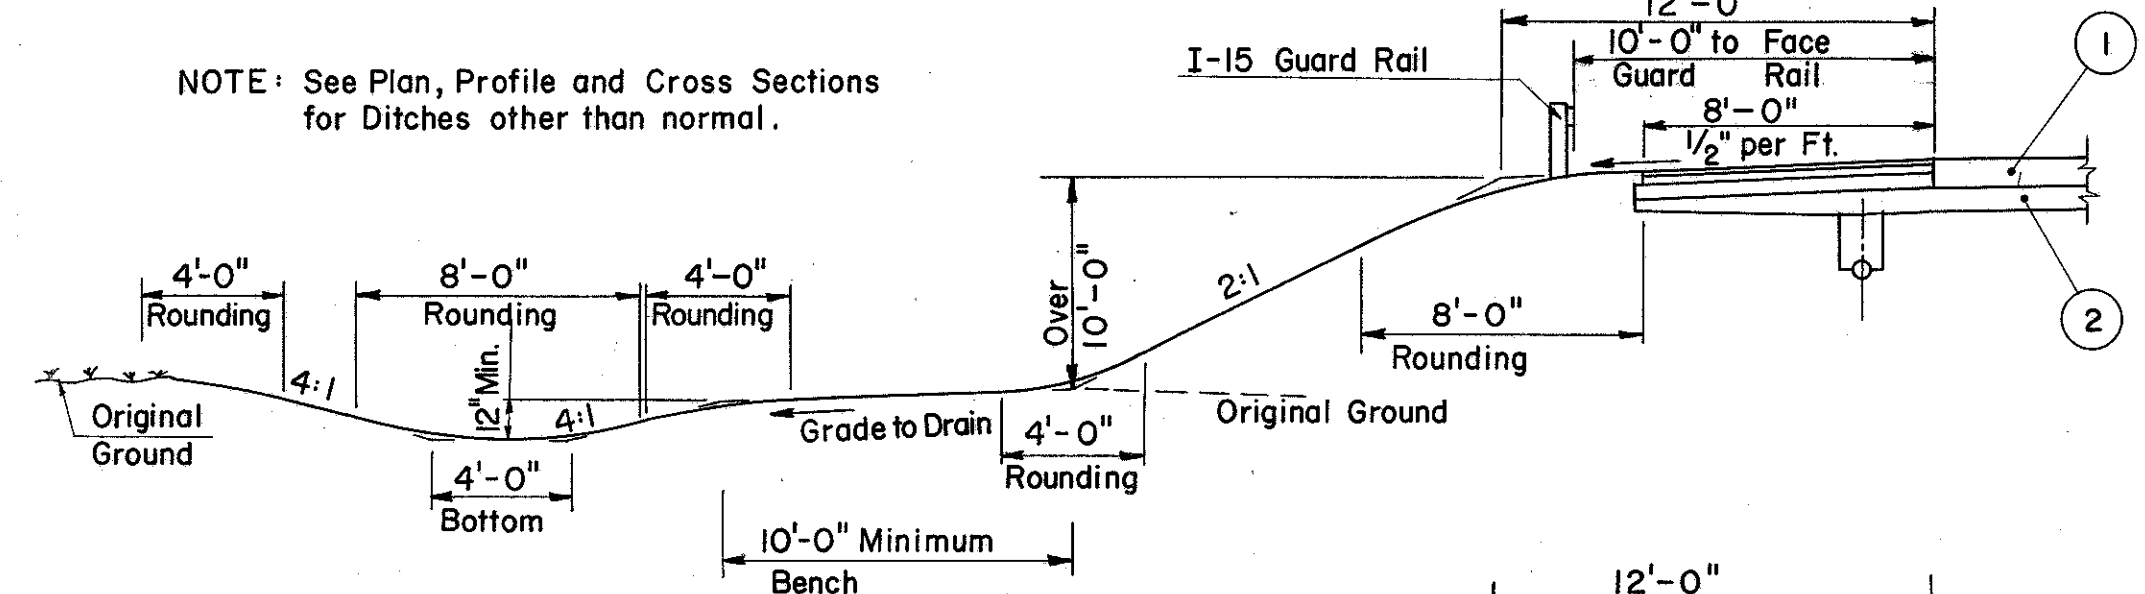


TYPICAL SECTIONS

FED. RD. DIVISION	STATE	PROJECT	3 212
2	OHIO		

LAKE COUNTY
LAK-44-7.22

TYPE T-71
SCALE $\frac{3}{16}'' = 1'-0''$

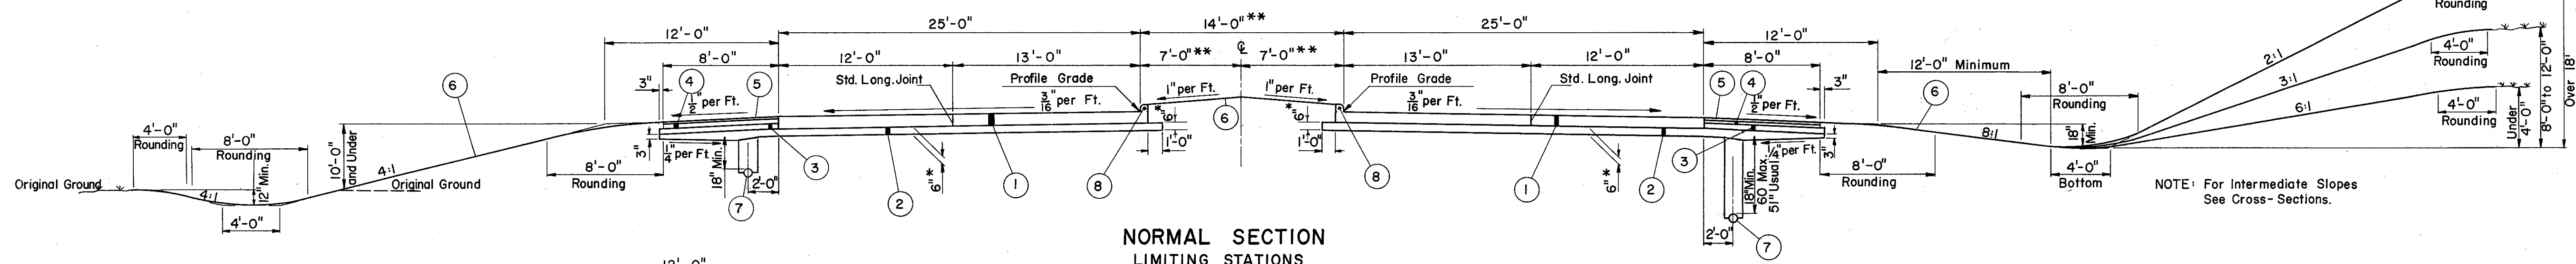

* 18" Subbase Thickness
Approximate Sta. 93+50 to Sta. 95+00
Approximate Sta. 101+00 to Sta. 103+50
Approximate Sta. 162+00 to Sta. 165+00
Frost-Susceptible Silt is anticipated thru these Areas.

† Thickness shown is "designed" thickness as described in Section B-21.01

- LEGEND**
- ① T-71 9" Reinforced Portland Cement Concrete Pavement.
 - ② I-22 Variable depth Subbase Grading A or B as per plan.
 - ③ I-18 5" Stabilized Crushed Aggregate
 - ④ B-21 3" Waterproofed Aggregate Base Course
 - ⑤ T-31 Bituminous Surface Treatment (See Proposal Note)
 - ⑥ L-9 Seeding and Protecting
 - ⑦ I-1 6" Pipe Class I-3
 - ⑧ I-12 Concrete Curb, Std. Type 2-A