



LAK-6-9.84

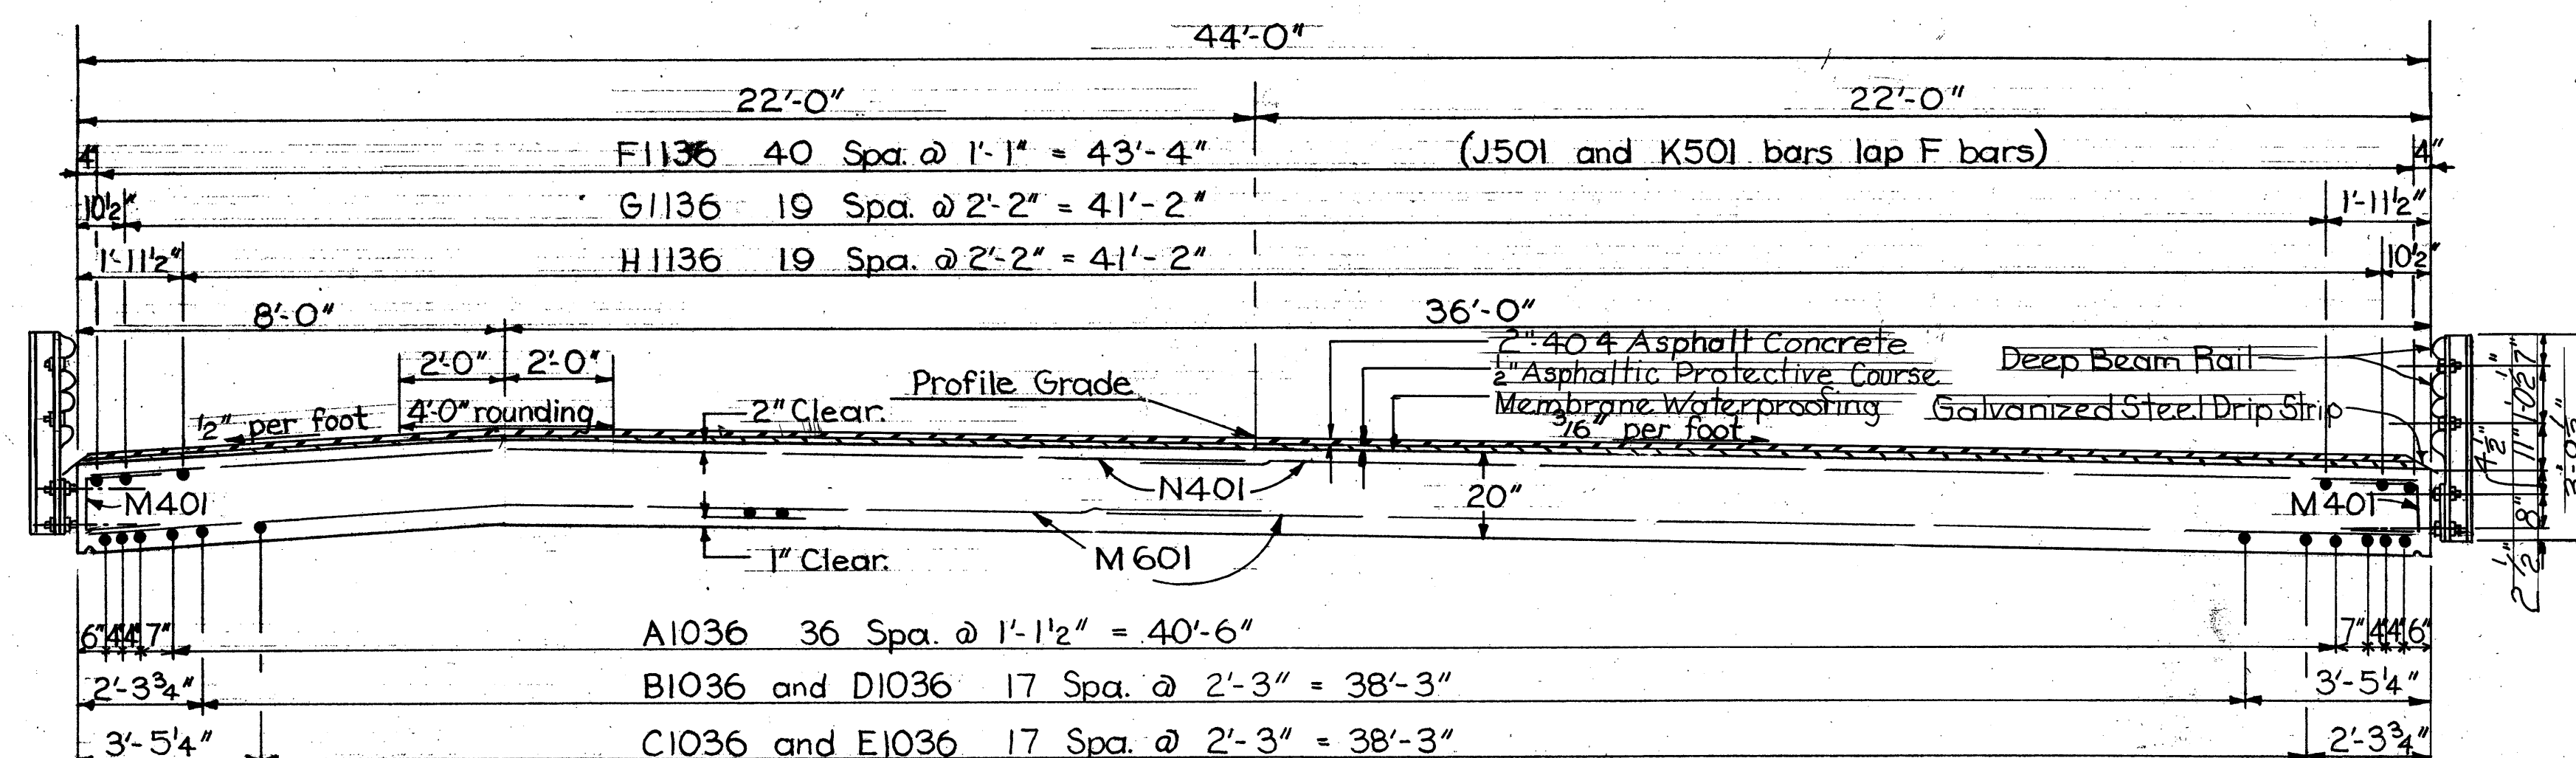

For further details see Std. Dwg. CS-1-71



Note: For additional Paving details
See Std. Dwg. DBR-1-71.

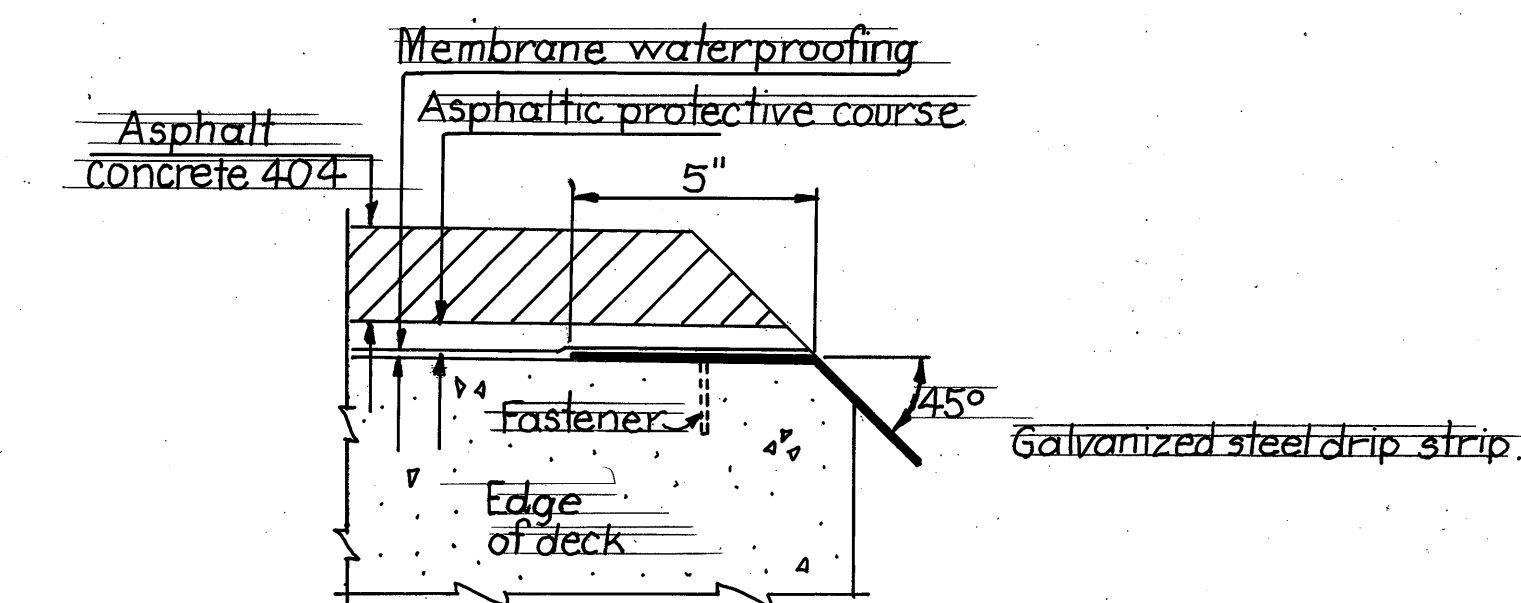


**DRIP STRIP
BRIDGES WITHOUT CURBS**

Galvanized Steel Drip Strip: Prior to applying deck membrane waterproofing a bent galvanized steel drip strip 8" x 0.105" shall be installed along the edges of the deck as shown. The strips shall be fastened at 3'-0" maximum with power driven pins or #10 galvanized expansion screws, subject to the approval of the Engineer. The strips shall be placed the full length of the deck. Where splices are required a 3" (min.) lap shall be used, with a fastener through the lap. Steel shall meet the requirements of ASTM A568 and galvanizing shall be in accordance with Z11.02. Payment shall be at the contract price bid for Item Special, Sq. Ft., Galvanized steel drip strip which shall include all materials, labor, tools and incidentals necessary to complete the item.

COMPOSITE TRANSVERSE SECTION

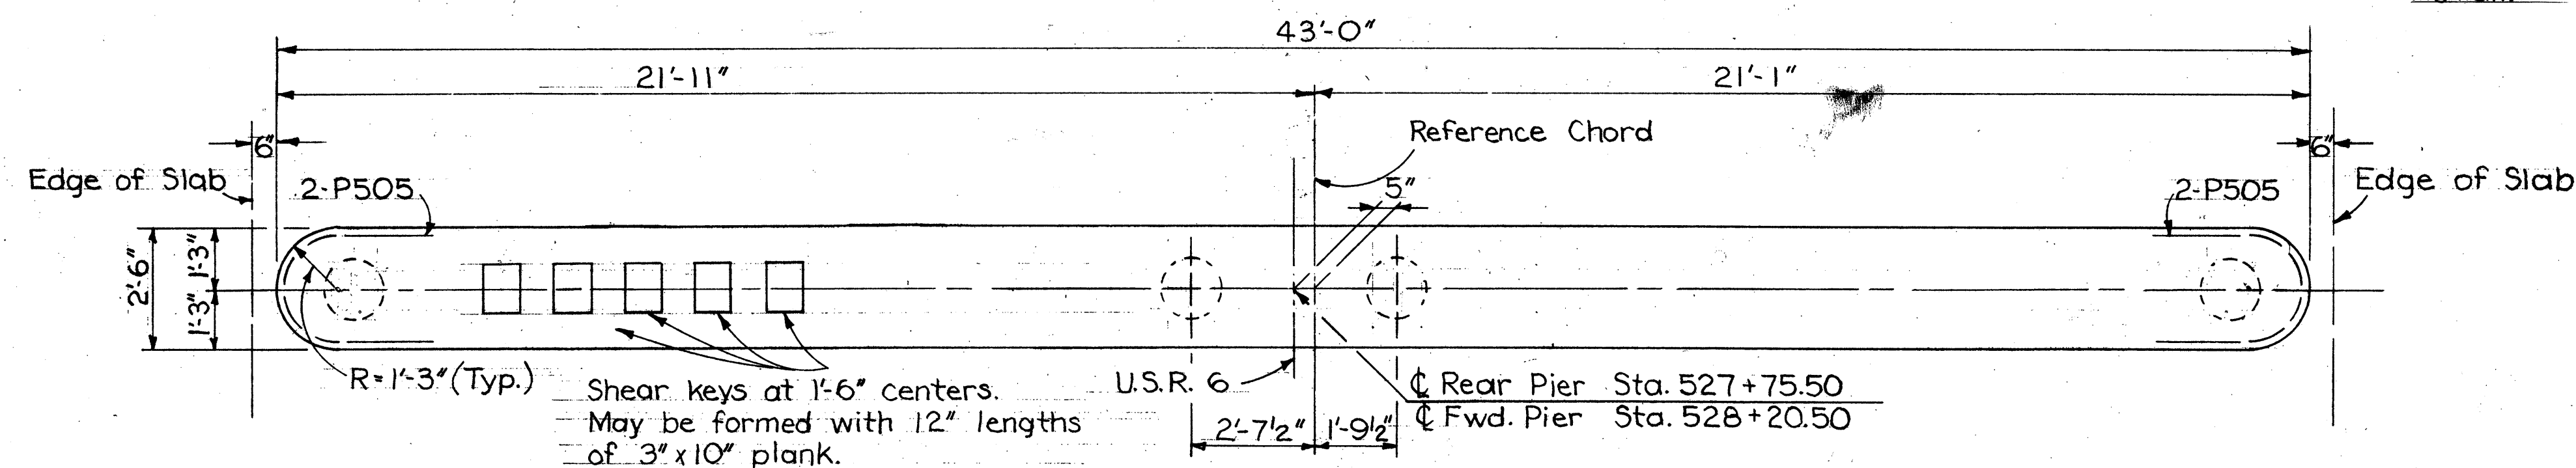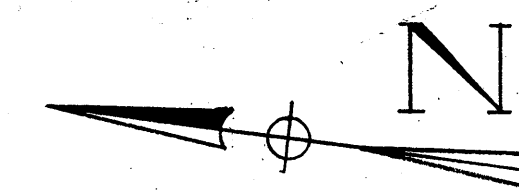

FORWARD AND REAR PIER PLAN

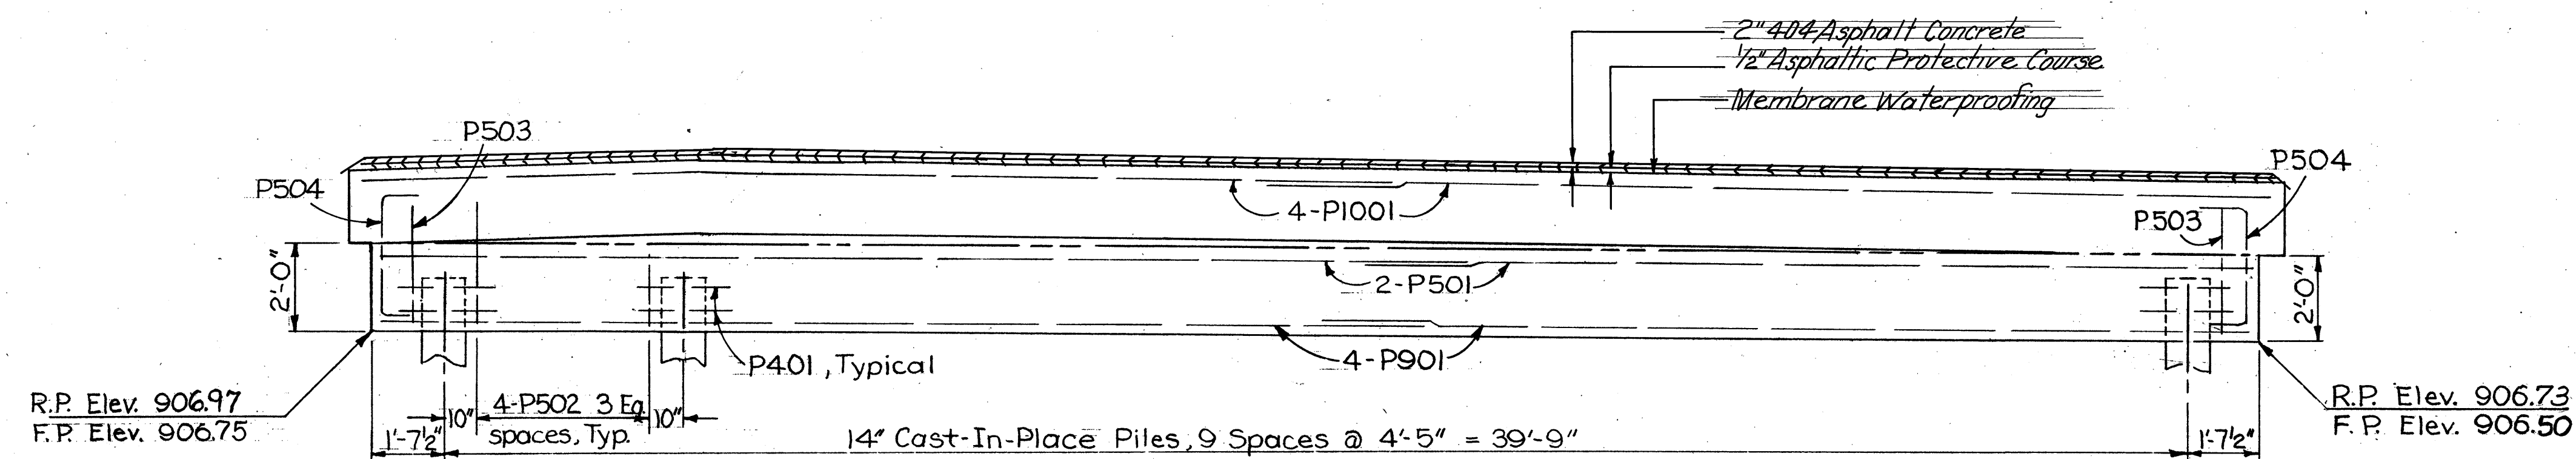

ELEVATION

Composite Transverse Section
Forward and Rear Pier
Plan and Elevation
Br. No. LAK-6-0990
Over East Br. Chagrin River

DESIGNED	DRAWN	TRACED	CHECKED	REVIEWED	DATE
AGD	AGD		J.D.R.	BFG	8-25-72