


SIGNAL DISPLAY CHART

SIGNAL	Ø1	Ø2	Ø3	Ø4	Ø5	Ø6	
HEAD	CLEAR	R/W	CLEAR	R/W	CLEAR	R/W	CLEAR
A	R	G	Y	R	R	R	R
B	R	G	Y	R	R	R	R
C	R	R	R	R	R	R	R
D	R	R	R	R	R	R	R
E	R	R	R	R	R	R	R
F	R	R	R	R	R	R	R
G	R	R	R	R	R	R	R
H	R	R	R	R	R	R	R

SIGNAL TIMING CHART

INTERVAL	PHASE					
	1	2	3	4	5	6
MIN. GREEN						
EXTENSION						
GAP						
MAX. GREEN		15.0	10.0	10.0		11.0
YELLOW		4.0	3.0	3.0		4.0
ALL RED	20.0				20.0	
MEMORY						
RECALL	OFF	ON	OFF	OFF	OFF	OFF

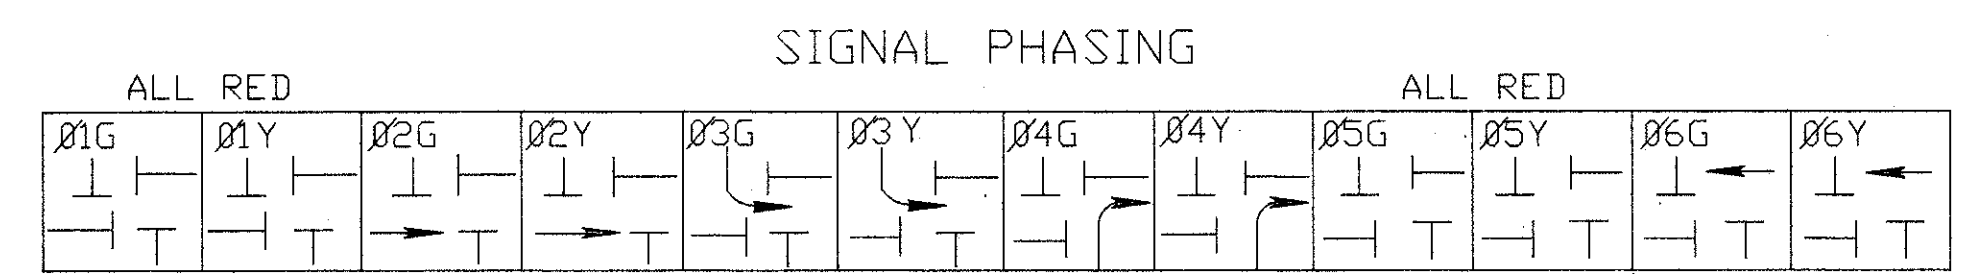

Ø2, Ø3, Ø4, AND Ø6 GREEN SHALL BE ACTUATED BY DETECTORS AS SHOWN ON SHT. 25/45. Ø1 & Ø5 ARE DUMMY PHASES TO TIME ALL RED INTERVAL. TIMING INITIALIZES ON PHASE ONE.

REVISED BY: D.D.T. DISTRICT 12 PLANNING & DESIGN DATE: 8-4-93

209620 C DATE: 09/09/88

DETAILS FOR ACTUATED SIGNALIZED CLOSING 1 LANE OF A 2-LANE HIGHWAY (4 PHASE)

PLAN INSERT SHEET

DESIGNED	DRAWN	CHECKED	REVIEWED	REVISED
DATE	DATE	DATE	DATE	DATE

OHIO SHEET /