

GENERAL NOTES

ROUNDING OF CORNERS SHOWN ON CROSS

THE ROUNDED CORNERS SHOWN ON THE TYPICAL SECTIONS APPLY TO ALL CROSS SECTIONS EVEN THOUGH OTHERWISE SHOWN ON THESE PLANS.

SEEDING

QUANTITIES FOR SEEDING ARE CALCULATED FOR AREAS BETWEEN THE AGGREGATE SHOULDER EDGE AND THE SLOPE EASEMENT.

ITEM 616 DUST CONTROL

THE FOLLOWING ESTIMATED QUANTITY HAS BEEN PROVIDED FOR APPLICATION FOR THE PREVENTION OR ALLEVIATION OF DUST WHERE DIRECTED AND IN THE AMOUNTS SPECIFIED BY THE ENGINEER.

ITEM 616	WATER	15 M. GAL.
----------	-------	------------


ITEM 605 AGGREGATE DRAINS

AGGREGATE DRAINS SHALL BE PLACED AT FIFTY (50) FOOT INTERVALS AND SHALL INCLUDE AN AGGREGATE DRAIN AT THE LOCATION OF THE BEGINNING OF THE SUBBASE.

ESTIMATED QUANTITY	50 LIN. FT.
--------------------	-------------

DETOUR


TRAFFIC WILL BE DETOURED FOR THE DURATION OF THE PROJECT. DETOUR LOCATIONS WILL BE SPECIFIED BY AND MAINTAINED BY DIVISION OF HIGHWAYS DISTRICT 12 TRAFFIC DEPARTMENT.

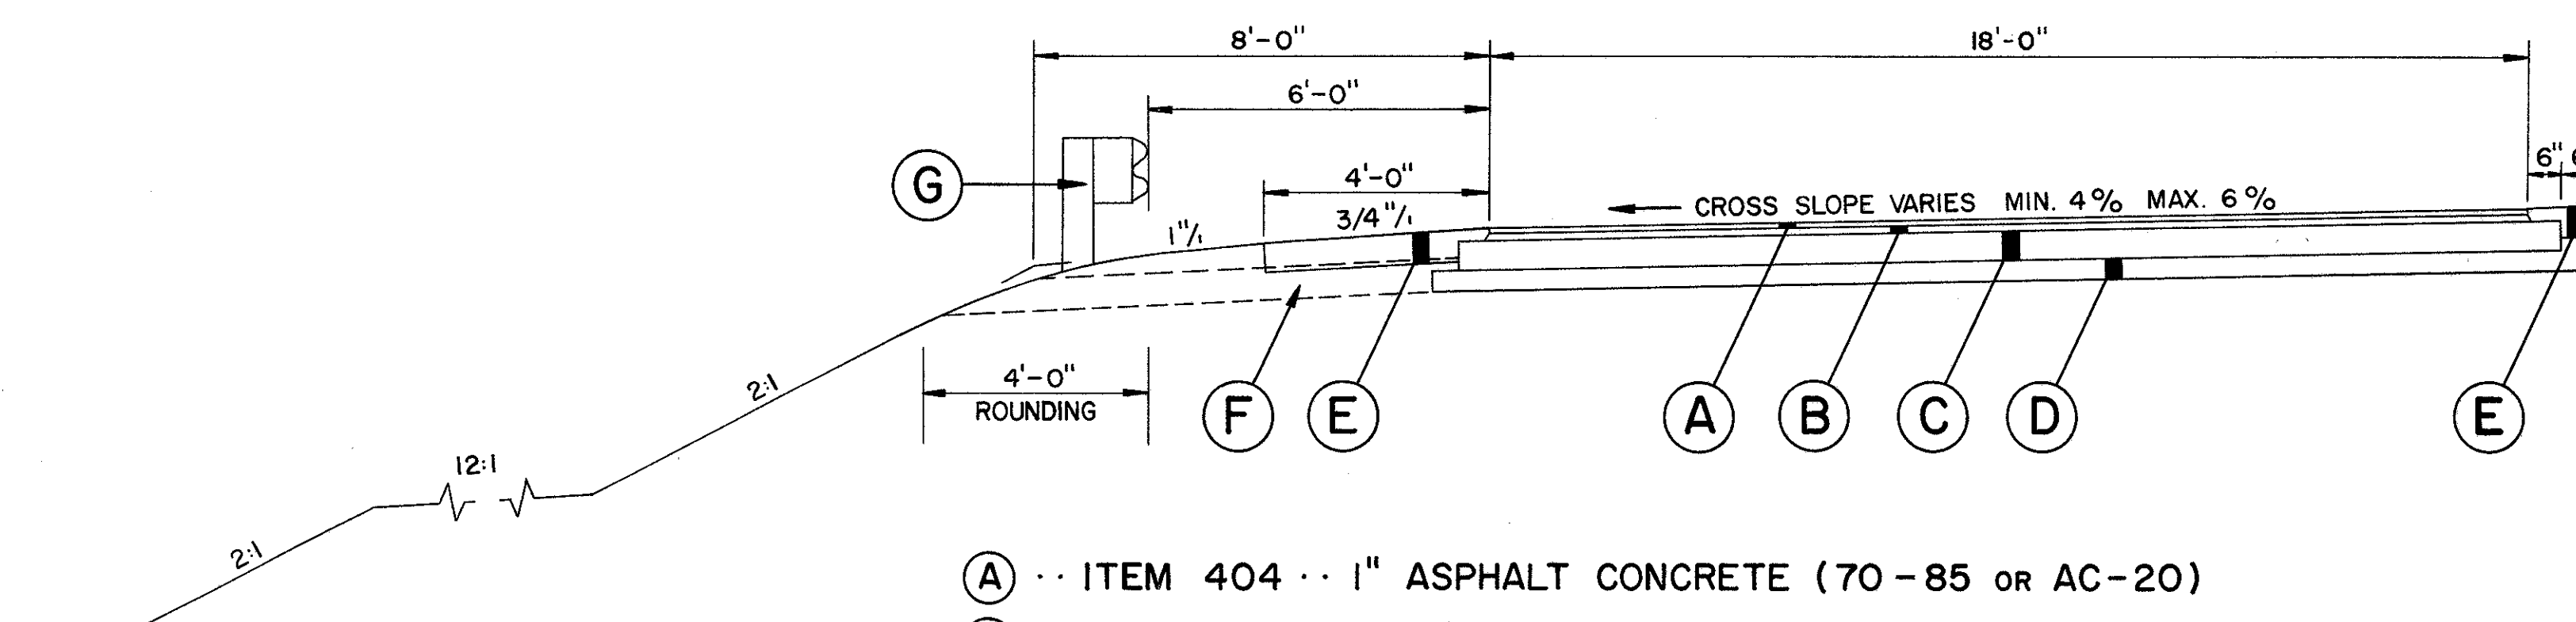

- (A) .. ITEM 404 .. 1" ASPHALT CONCRETE (70-85 OR AC-20)
- (B) .. ITEM 402 .. 1 1/2" ASPHALT CONCRETE (70-85 OR AC-20)
- (C) .. ITEM 301 .. 6" BITUMINOUS AGGREGATE BASE (70-85 OR AC-20 OR RT-11 OR 12)
- (D) .. ITEM 310 .. 4" SUBBASE
- (E) .. ITEM 304 .. 6" AGGREGATE BASE
- (F) .. ITEM 605 .. AGGREGATE DRAINS
- (G) .. ITEM 606 .. GUARD RAIL, TYPE 5 REBUILT FROM TYPE 7

TYPICAL SECTION

STA. 45+50 TO STA. 48+00
SCALE 3/8" = 1'-0"

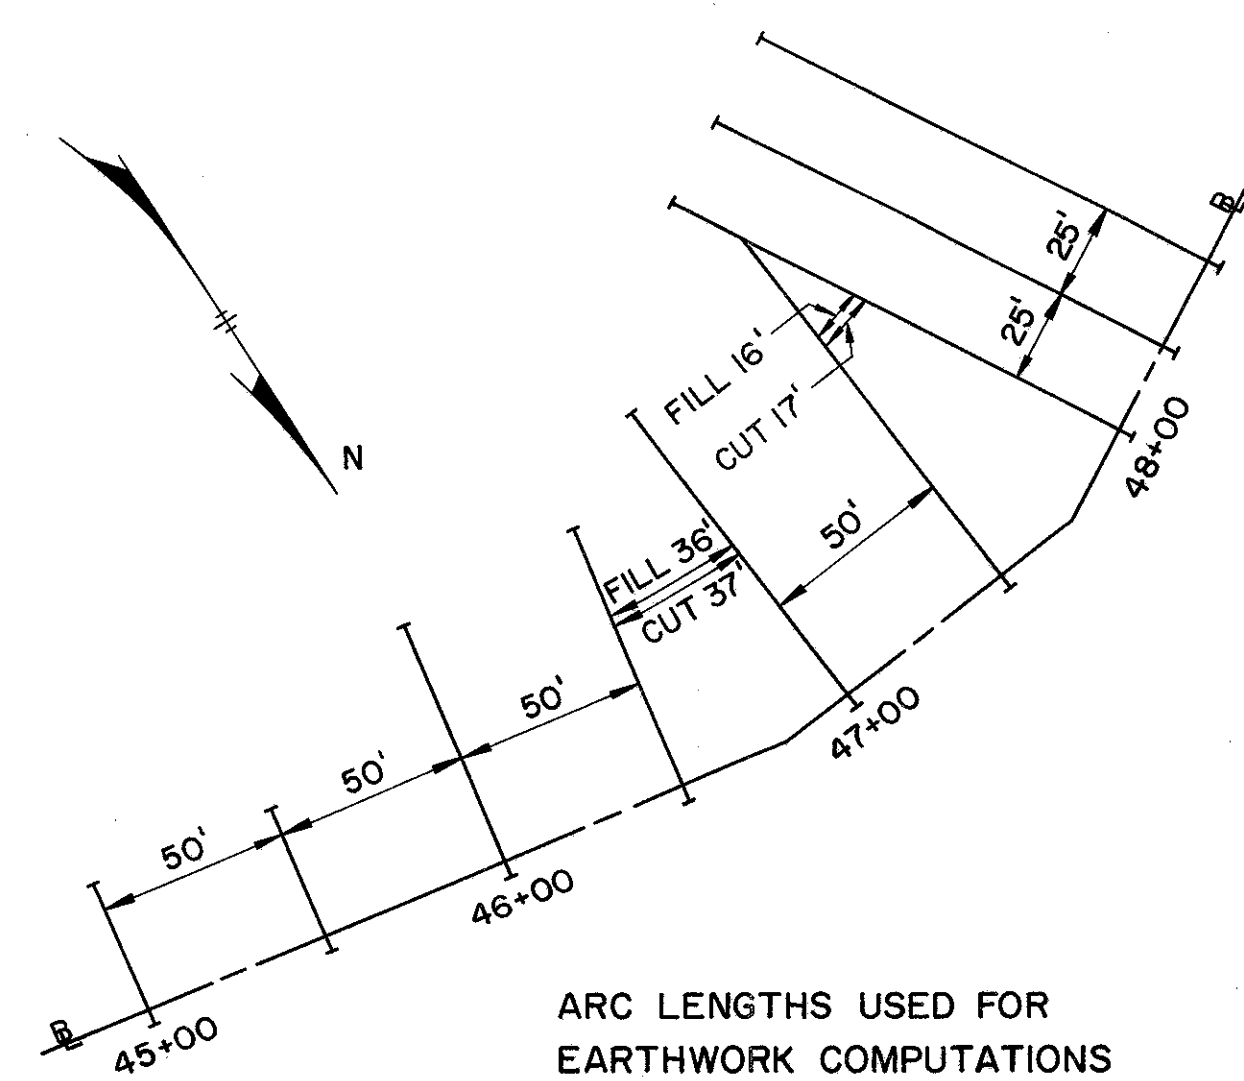

ARC LENGTHS USED FOR
EARTHWORK COMPUTATIONS