


TYPICAL SECTIONS


TYPE T-35 on B-19

SCALE $\frac{3}{8}" = 1'-0"$

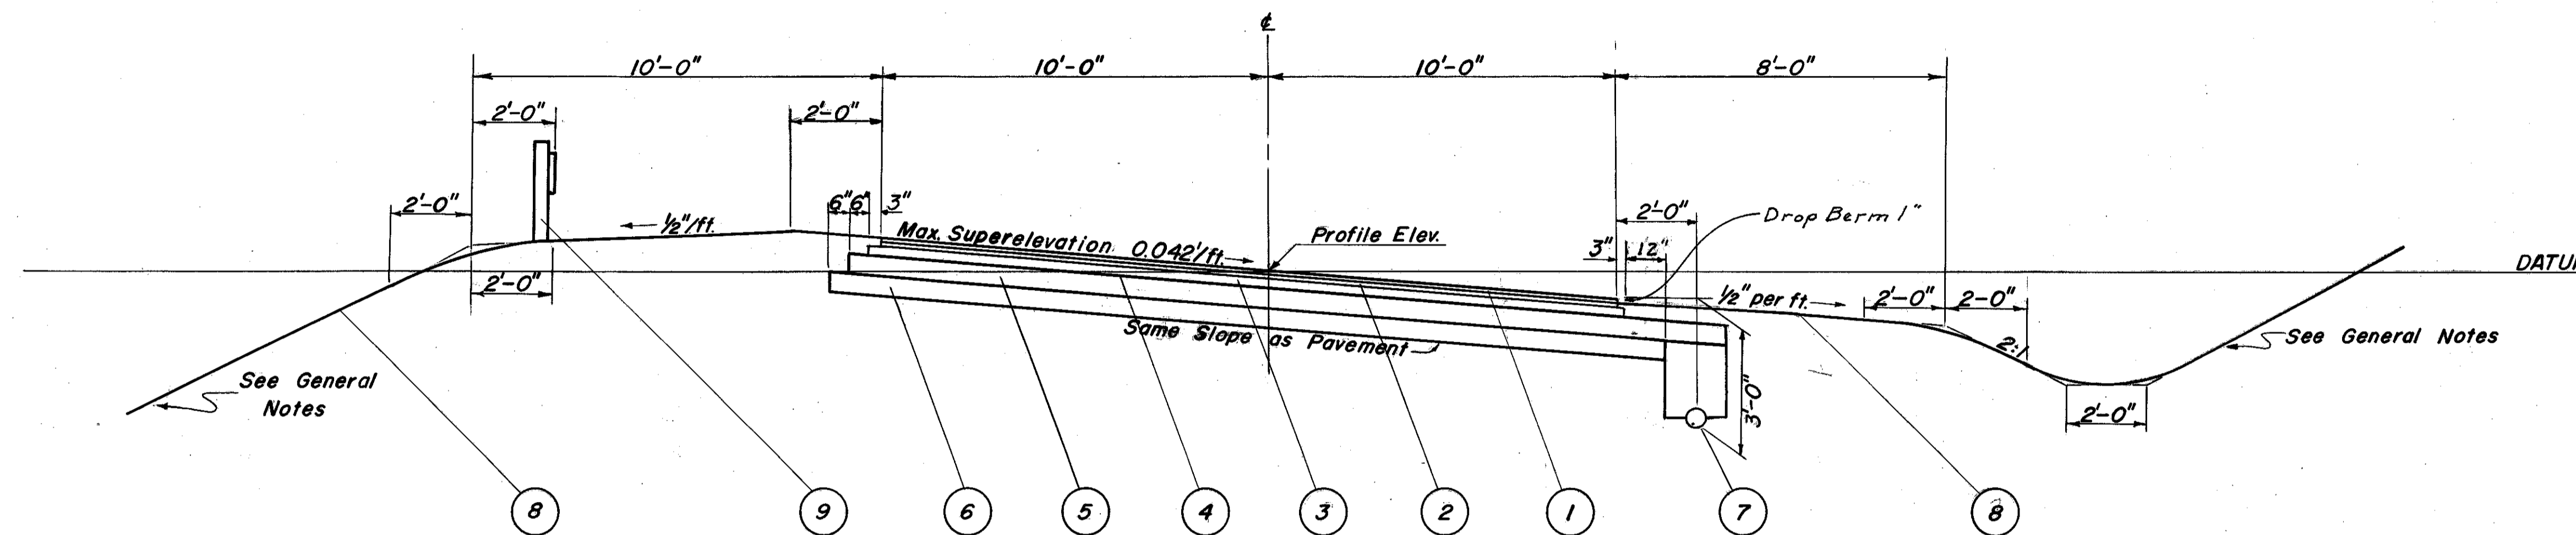

SUPERELEVATED SECTION
Sta. 0+12.07 To Sta. 9+65.79

- ① * T-35 1" Asphaltic Concrete Surface Course (85-100), Type "C"
- ② * B-35 1½" Asphaltic Concrete Leveling Course (85-100)
- ③ * B-35 3" Asphaltic Concrete Base Course (85-100)
- ④ T-30 Bituminous Prime Coat, Sec. M-5.7, RT-2 or RT-3 applied at the rate of 0.40 gal. per sq. yd.
- ⑤ B-19 6" Aggregate Base Course
- ⑥ I-22 6" Subbase Grading "A" or "B", as per plan
- ⑦ I-4 6" Underdrains
- ⑧ L-9 Seeding & Protecting
- ⑨ I-15 Guard Rail

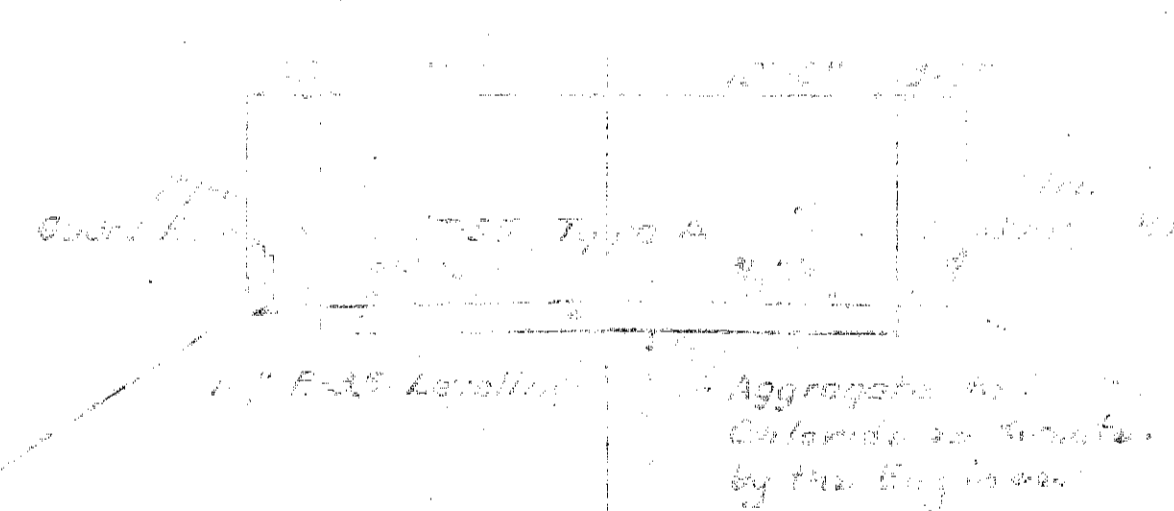

TYPICAL SECTION
TEMPORARY SHOULDER
Notes: aggregate and subgrade used as shown on plan and to be checked by the Engineer.

GENERAL NOTES

- 1. Fills less than 10ft., 4:1 Slopes without Guard Rail
- 2. Fills greater than 10ft., 2:1 Slopes with Guard Rail
- 3. Cuts less than 10ft., 4:1 Slopes
- 4. Cuts greater than 10ft., 2:1 Slopes
- 5. Shoulders with Guard Rail shall be 10ft. Shoulders without Guard Rail shall be 8ft.
- 6. Limit of Seeding & Protecting - 10ft. beyond the work limits or to the Right-of-Way line when it is less
- * 7- Thicknesses shown are "designed" thicknesses as described in Section T-35.01 and B-35.01