


**BRACE ROD PLATE**

**ELEVATION**

**TYPE T**

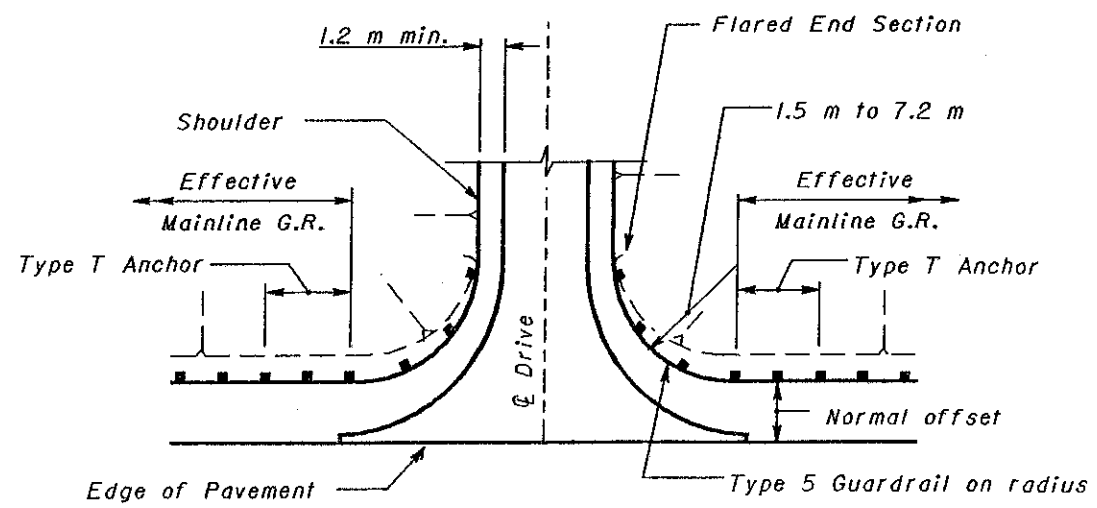

**DRIVEWAY OPENING**

**NOTES**

- FOR DETAILS NOT SHOWN:** See SCD's GR-1.1M, GR-1.2M and other Drawings pertaining to design of specific guardrail types.
- WASHERS:** All washers indicated are standard galvanized steel of the appropriate size.
- POSTS:** Posts shall be the same as used on the adjacent guardrail, with 100 mm minimum concrete encasement.
- SPACER BLOCKS:** Blocks may be notched in the field, in a manner satisfactory to the Engineer, to accommodate the installation of the brace rod plate 16 mm attachment bolts.
- BRACE ROD ASSEMBLY:** Rods shall be galvanized and develop a tensile strength of at least 178 kN.
- \* FOR SPECIFIC POST EMBEDMENT:** See SCD GR-1.2M for depth requirements.

All dimensions are in millimeters unless otherwise noted.



|  |                                    |
|--|------------------------------------|
| <b>OHIO DEPARTMENT OF TRANSPORTATION</b>     |                                    |
| <b>TYPE T<br/>ANCHOR ASSEMBLY</b>            | <b>DATE</b><br>4-21-95<br>10-21-97 |
| <b>STANDARD CONSTRUCTION DRAWING GR-4.2M</b> |                                    |
| APPROVED <i>Randy T. Lubbock</i>             |                                    |