



RIPRAP AND AGGREGATE FOR TREE PROTECTION AND AERATION IN FILL

Where fill around tree is 300 mm or more in depth over any part of feeding root area or periphery of the tree, a well is to be constructed as shown.

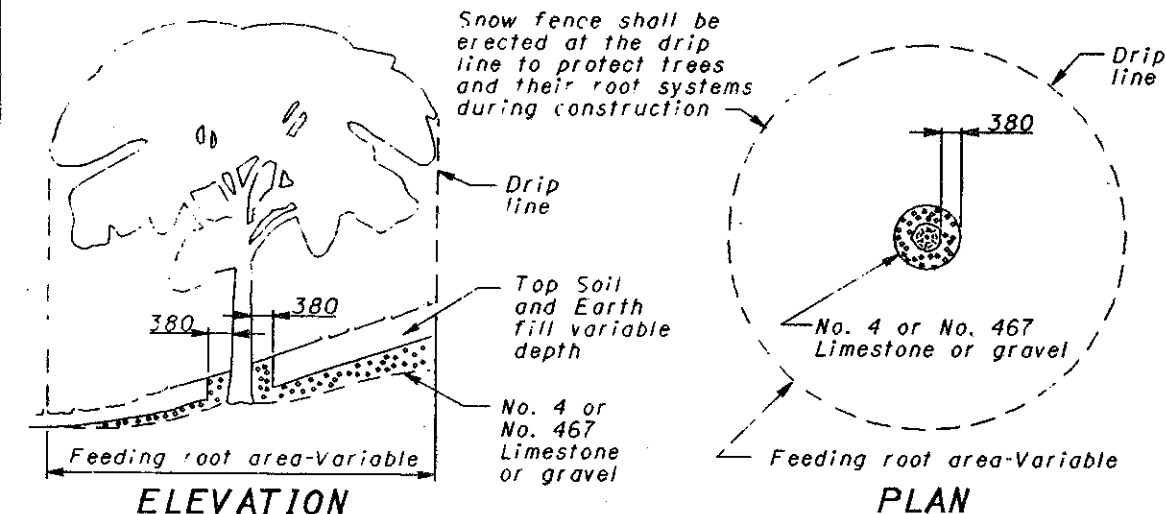


AGGREGATE FOR TREE ROOT PROTECTION IN FILL

Where fill around tree is less than 300 mm in depth over any part of feeding root area or periphery of the tree, construct as shown.

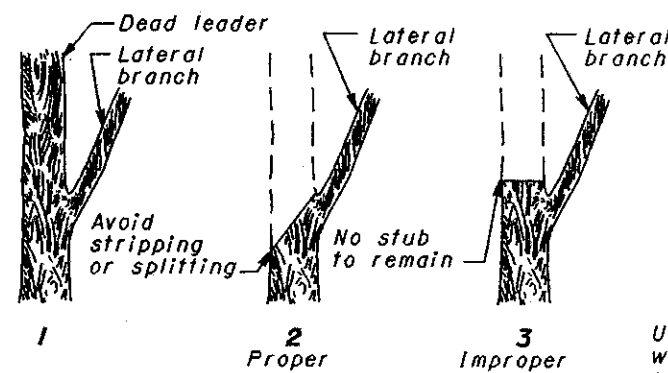


PART OF LEADER OR BRANCH TO BE REMOVED

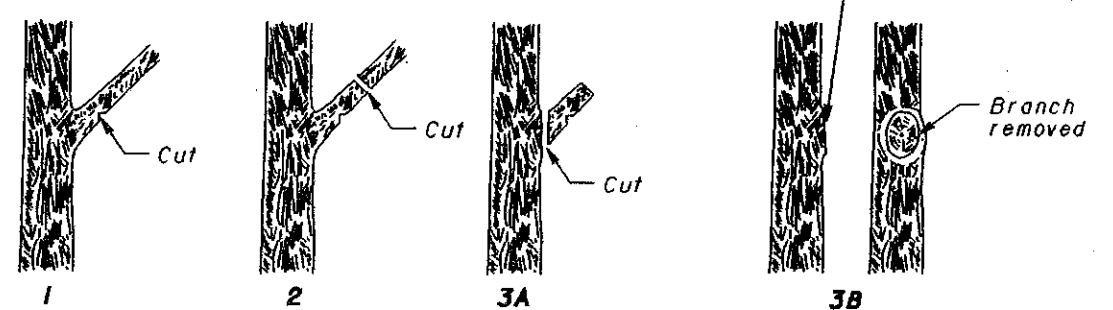


Undercut 1/3 of way through to prevent bark from stripping.
 Remove the limb by making one downward cut leaving a stub.
 Removed the stub by making one downward cut from the top side.
 Final cuts shall be made flush with the remaining limb or trunk and painted if the cut diameters exceed a value between 13 mm and 25 mm as specified in the plans.

PROPER REMOVAL OF BRANCHES

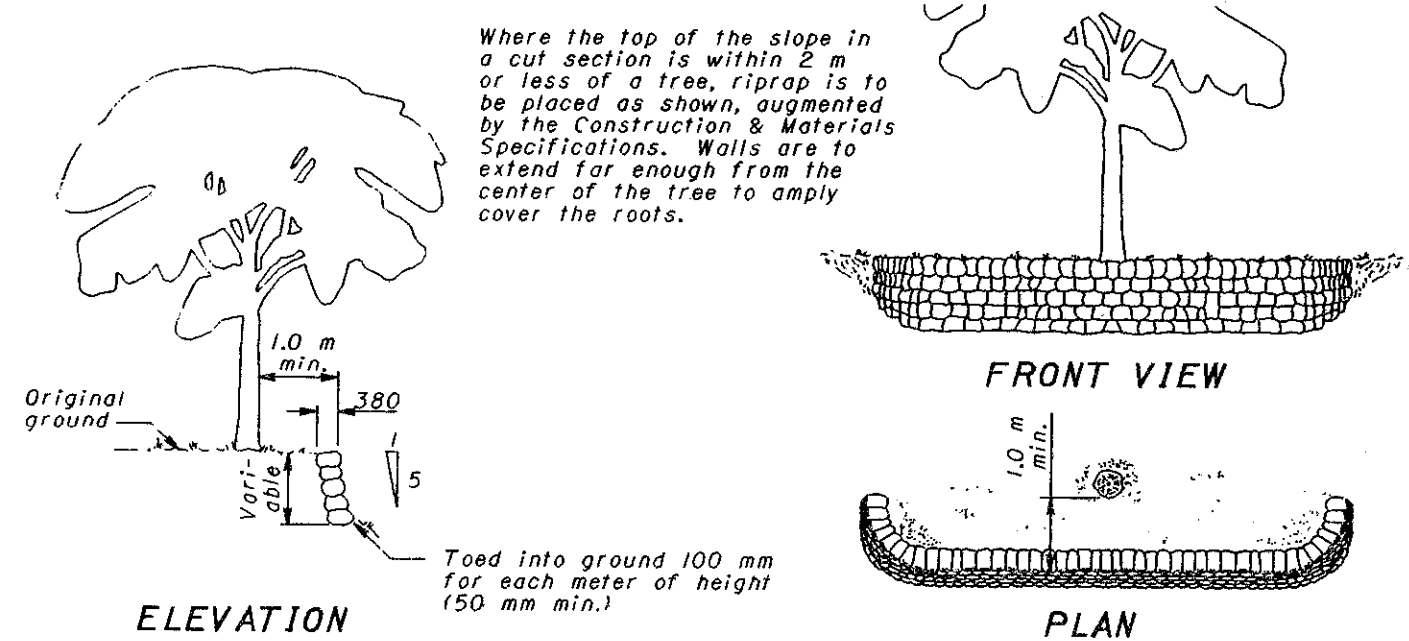

RIPRIP FOR TREE PROTECTION IN CUT

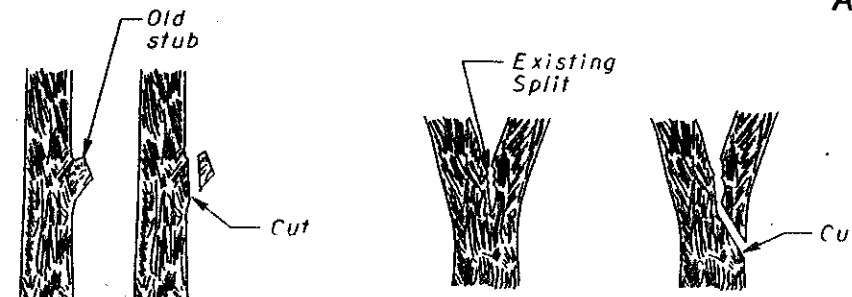

REMOVING STUBS

PROPER CROTCH TREATMENT

PRUNING

All dimensions are in millimeters unless otherwise noted.



This Drawing Replaces LA-1.

OFFICE OF ROADWAY ENGINEERING
OHIO DEPARTMENT OF TRANSPORTATION

TREE WELLS & PRUNING

DATE
9-6-95

STANDARD CONSTRUCTION DRAWING
LA-1.1M

APPROVED *D.K. Hulwace, P.E.*
ADMINISTRATOR