


GENERAL QUANTITIES FOR RETAINING WALL

ITEM	QUANTITY	UNITS	DESCRIPTION
503	57	CU. YDS.	UNCLASSIFIED EXCAVATION, AS PER PLAN
524	195	LIN. FT.	DRILLED SHAFT, 30" DIAMETER
509	3,110	POUND	REINFORCING STEEL, GRADE 60, EPOXY COATED
511	39	CU. YDS.	CLASS C CONCRETE, RETAINING WALL
513	16,741	POUND	STRUCTURAL STEEL (ASTM 36)
513	364	EACH	WELDED SHEAR STUD
690	300	SQ. FT.	PREFABRICATED GEOCOMPOSITE IN-PLANE DRAIN
690	108	EACH	4" x 12" x 7'-10" TIMBER

THESE QUANTITIES HAVE BEEN CARRIED TO GENERAL SUMMARY SHEET 13-14.

NOTES:
 FOR RETAINING WALL TYPICAL SECTION SEE SHEET 2-3.
 FOR PLAN AND PROFILE SEE SHEET 15-17.
 FOR CROSS SECTIONS SEE SHEETS 18-29.
 FOR RETAINING WALL DETAILS SEE SHEET 30-36.
 FOR ELEVATION OF WALL SEE SHEET 33.
 FOR SOIL BORING LOGS SEE SHEETS 38-42.

DATE: 09-19-96 - TIME: 14:57 - H:\CT\93119\CAD2\9311921A.DWG

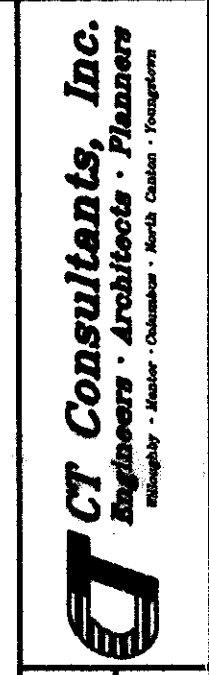

DATE 6/94
 REVIEWED J.E.A.
 STRUCTURE FILE NUMBER 1810057

DESIGNED 6/94
 CHECKED J.P.R.
 DRAWN 6/94
 REVISIONS

LAKE COUNTY
 STA. 36+40
 STA. 40+40

SITE PLAN
 RETAINING WALLS
 ALONG S.R. 174

LAK - 174 - 4.39

2 / 7

31
 47