


**CURVE DATA**

①	Δ = 8°07'14"	②	Δ = 13°58'20"
	R = 1509.83'		R = 638.62'
	T = 107.17'		T = 78.26'
	L = 213.98'		L = 155.73'
	Ch = 213.81'		Ch = 155.35'
③	Δ = 40°47'16"		
	R = 83.00'		
	T = 30.86'		
	L = 59.09'		
	Ch = 57.85'		

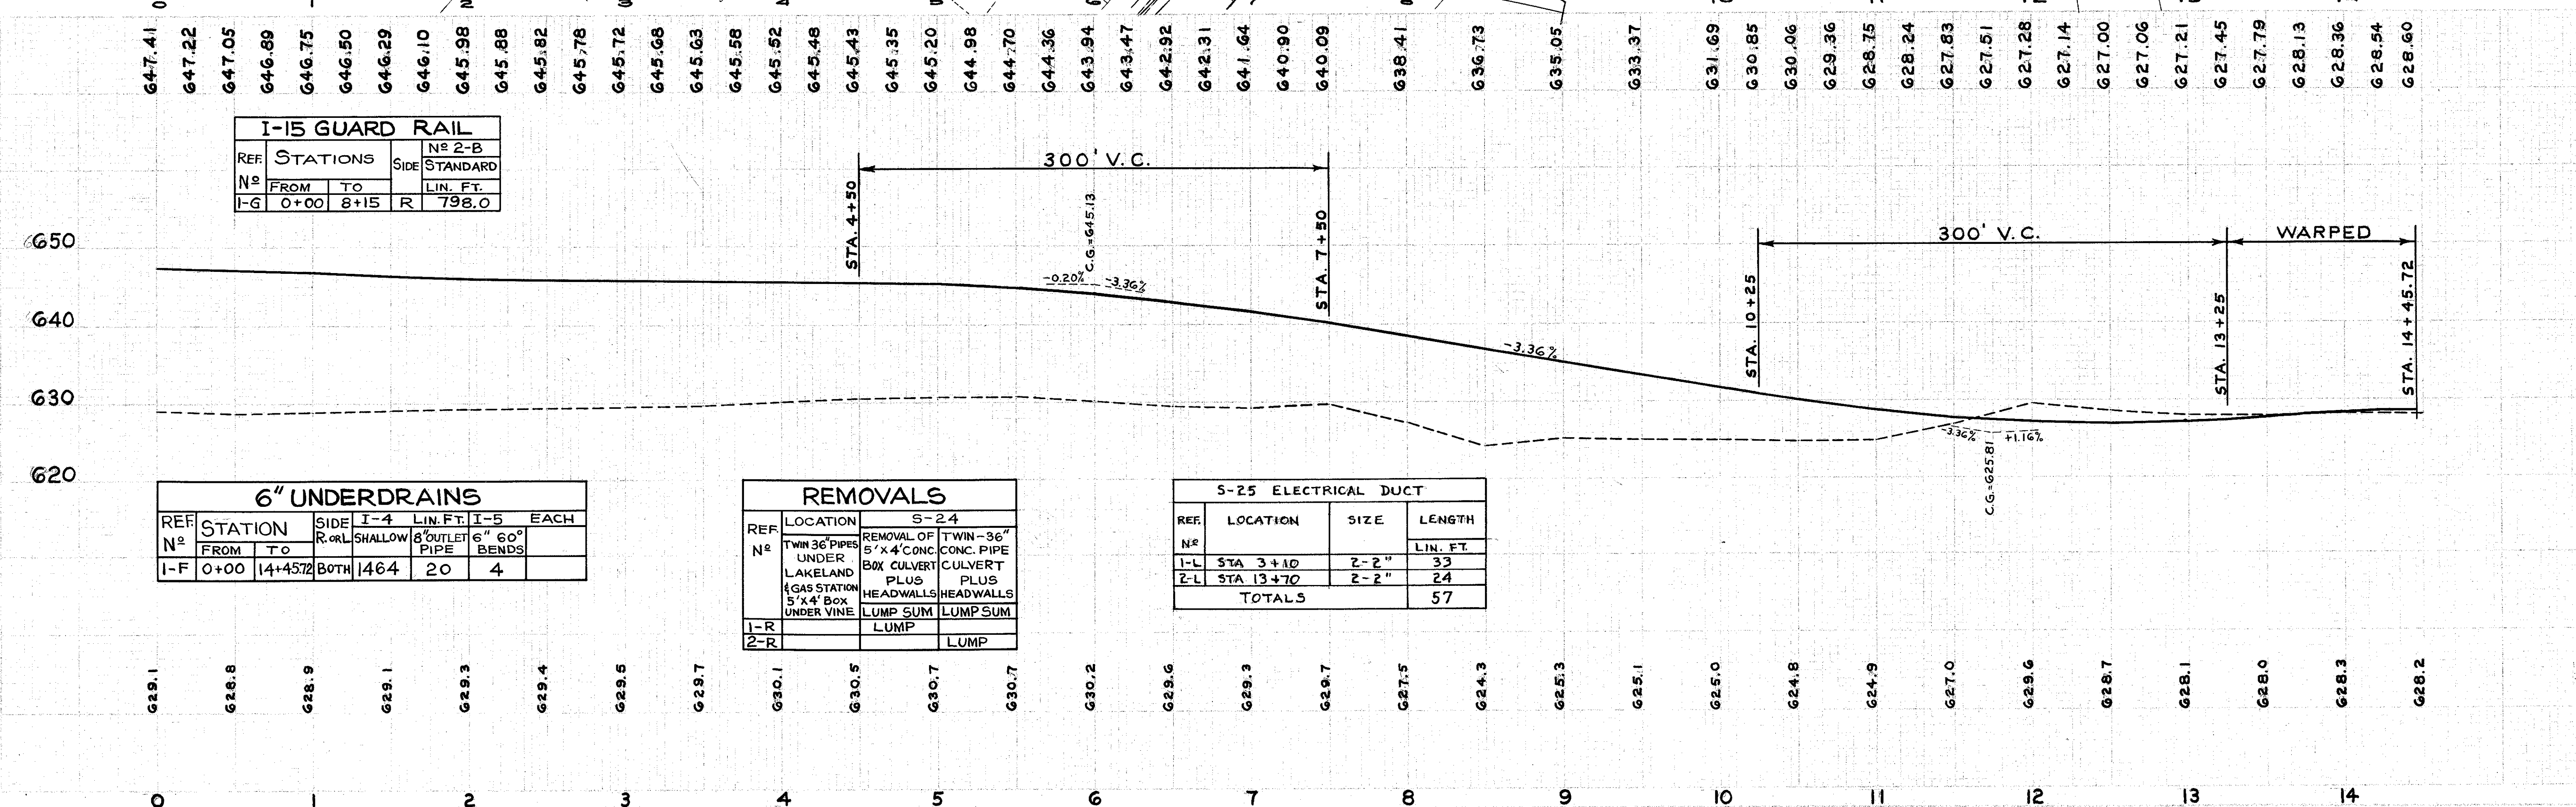

**I-15 GUARD RAIL**

REF. N°	STATIONS	SIDE	N° 2-B STANDARD
1-G	0+00 TO 8+15	R	798.0

**6" UNDERDRAINS**

REF. N°	STATION	SIDE	I-4	LIN. FT.	I-5	EACH
1-F	0+00 TO 14+45.72	BOTH	1464	20	4	

**REMOVALS**

REF. N°	LOCATION	S-24
1-R	TWIN 36" PIPES UNDER LAKELAND	REMOVAL OF 5' x 4' CONC. PIPE BOX CULVERT PLUS HEADWALLS
2-R	GAS STATION 5' x 4' BOX UNDER VINE	LUMP SUM
		LUMP SUM

**S-25 ELECTRICAL DUCT**

REF. N°	LOCATION	SIZE	LENGTH
1-L	STA 3+10	2-2"	33
2-L	STA 13+70	2-2"	24
<b>TOTALS</b>			<b>57</b>

PLAN & PROFILE RAMP N° 15 STA. 0+00 to STA. 14+45.72