


LAKE COUNTY  
LAK.-2-0.01

COMPUTED BY: W.J.B.  
CHECKED BY: J.T.B.

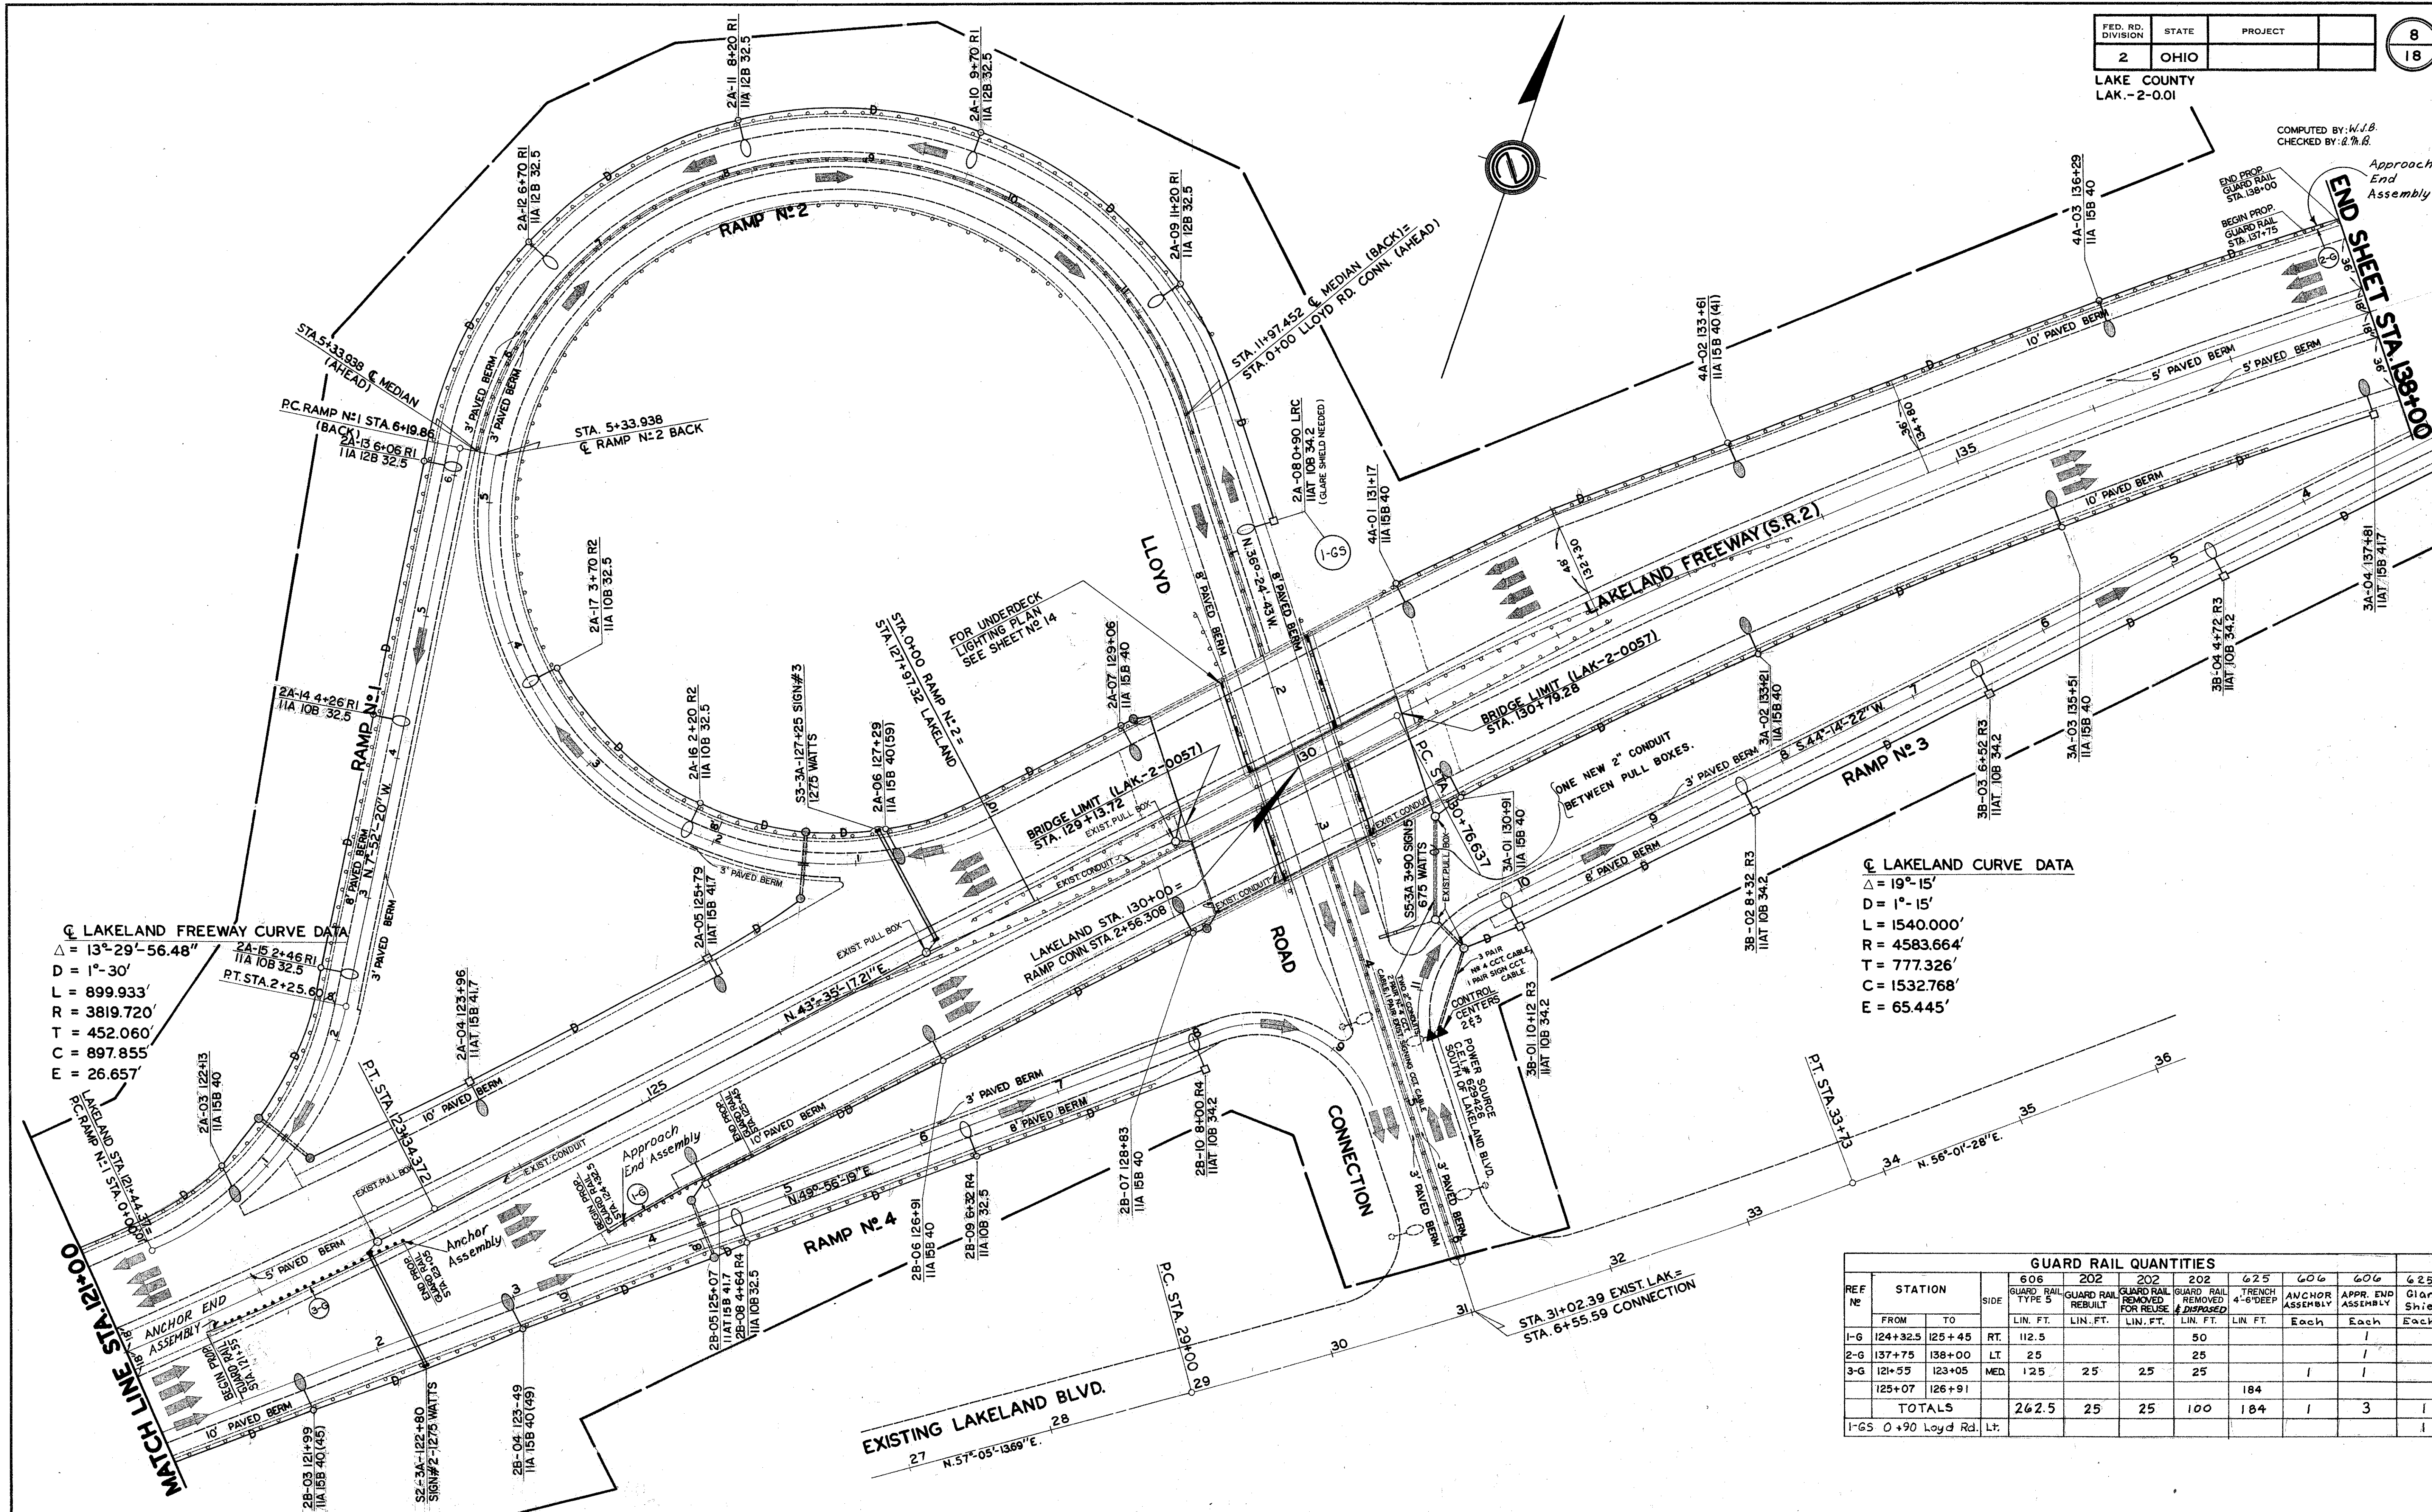

☉ LAKELAND FREEWAY CURVE DATA  
 $\Delta = 13^{\circ}29'56.48''$   
 $D = 1^{\circ}30'$   
 $L = 899.933'$   
 $R = 3819.720'$   
 $T = 452.060'$   
 $C = 897.855'$   
 $E = 26.657'$

☉ LAKELAND CURVE DATA  
 $\Delta = 19^{\circ}15'$   
 $D = 1^{\circ}15'$   
 $L = 1540.000'$   
 $R = 4583.664'$   
 $T = 777.326'$   
 $C = 1532.768'$   
 $E = 65.445'$

REF No	STATION		SIDE	GUARD RAIL QUANTITIES					ANCHOR ASSEMBLY	APPR. END ASSEMBLY	GLARE SHIELD
	FROM	TO		606 GUARD RAIL TYPE 5	202 GUARD RAIL REBUILT	202 GUARD RAIL REMOVED FOR REUSE	202 GUARD RAIL REMOVED & DISPOSED	625 TRENCH 4'-6" DEEP			
	LIN. FT.	LIN. FT.		LIN. FT.	LIN. FT.	LIN. FT.	Each				
1-G	124+32.5	125+45	RT	112.5			50			1	
2-G	137+75	138+00	LT	25			25			1	
3-G	121+55	123+05	MED	125		25	25			1	
	125+07	126+91						184			
<b>TOTALS</b>				<b>262.5</b>	<b>25</b>	<b>25</b>	<b>100</b>	<b>184</b>		<b>3</b>	<b>1</b>
1-G5 0+90 Lloyd Rd. Lt.											

LIGHTING PLANS...LAKELAND FREEWAY (S.R.2) @ LLOYD RD. INTERCHANGE STA. 121+00 TO STA. 138+00