


ELEVATION
REAR ABUTMENT

- Notes:
- Quantity for Item 519, Patching Concrete Structure made during field survey is for the purpose of establishing the contract unit price for this item. Actual quantities and extent of repair shall be as directed by the Engineer and measured in the field.
 - 1" deep saw cut to be made at surface before concrete is removed.
 - Notation: Sq. Ft. - Square Feet, Typ. - Typical, Exist. - Existing

Legend

Existing portions to be removed (reinforcing to be salvaged as indicated in plans)

Existing areas to be repaired per Item 519-Patching Concrete Structure.

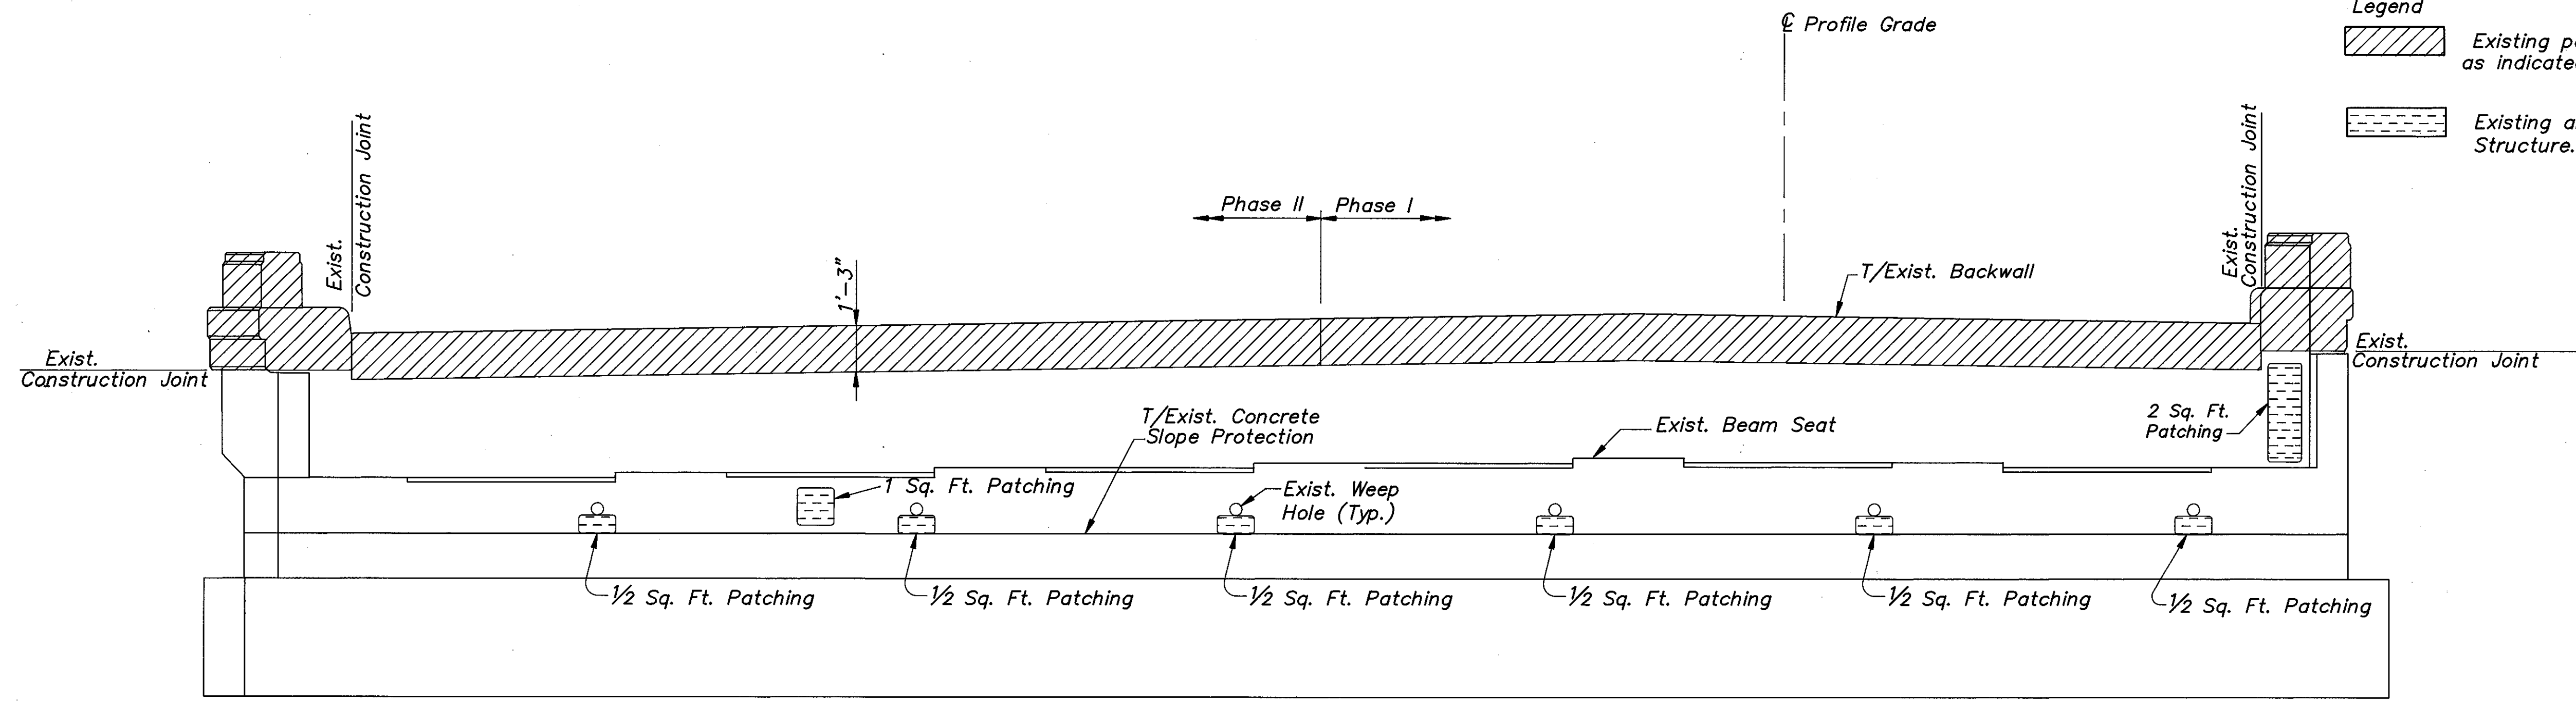

ELEVATION
FORWARD ABUTMENT

COLPETZER-THOMAS, INC. AN ENGINEERING GROUP <small>WILLOUGHBY • MENTOR • NORTH CANTON • STEUBENVILLE • LORAIN</small>					
6/78					
ABUTMENT DEMOLITION AND REPAIR BRIDGE NO. LAK-2-0180 L OVER RUSH ROAD LAKE COUNTY					
DESIGNED	DRAWN	TRACED	CHECKED	REVIEWED	DATE
B.J.A.	R.L.B.	R.L.B.	R.J.C.	J.E.A.	11/15/88