


ELEVATION
REAR ABUTMENT

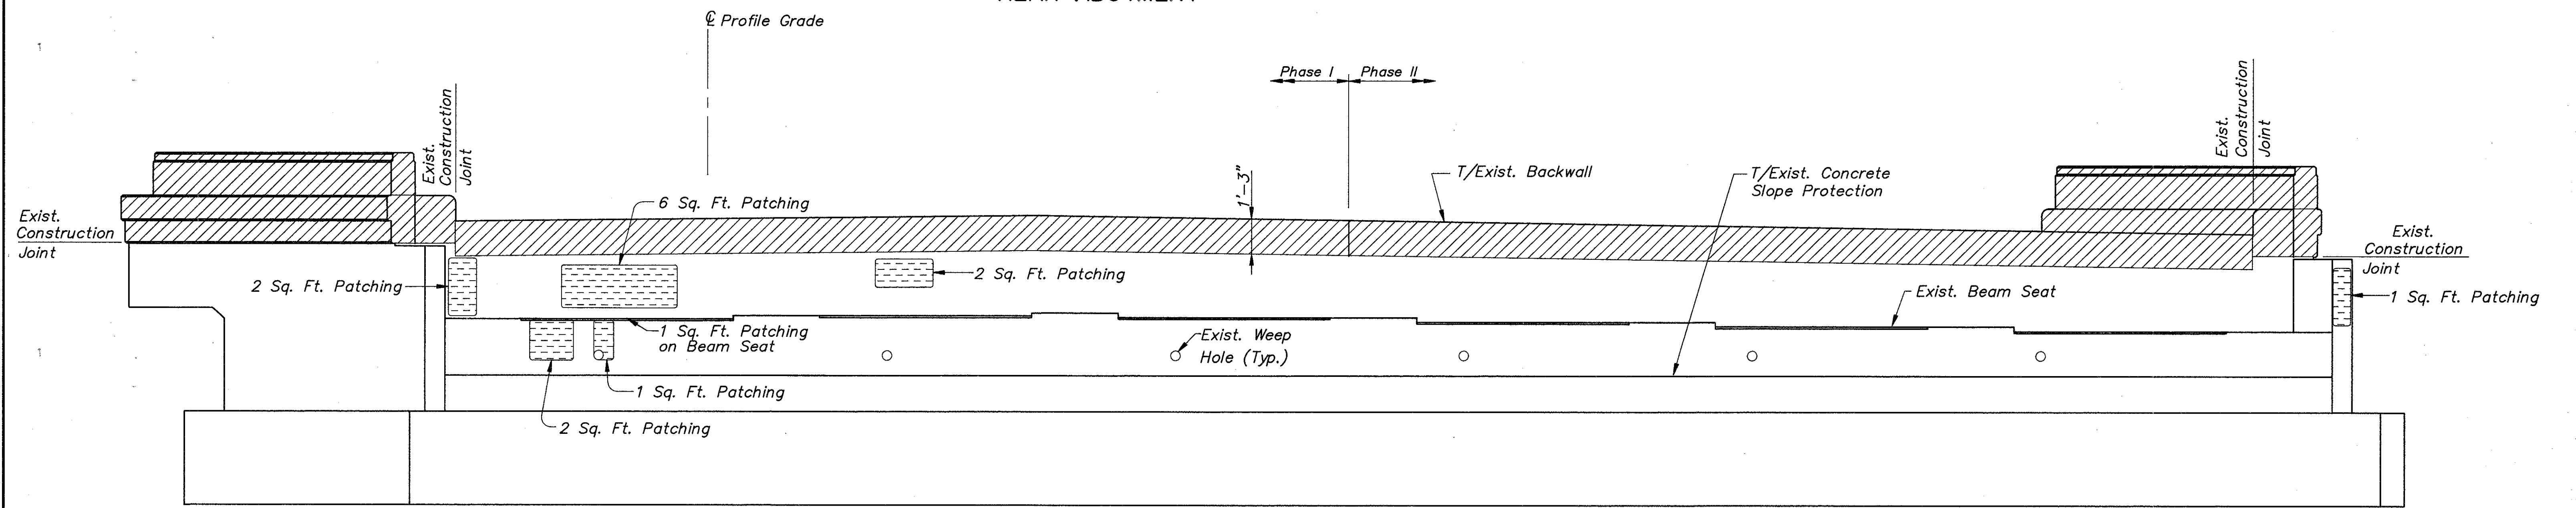

ELEVATION
FORWARD ABUTMENT

- Notes:
- Quantities for Item 519- Patching Concrete Structures, made during field survey are for the purpose of establishing the contract unit price for this item. Actual quantities and extent of repair shall be as directed by the Engineer and measured in the field.
 - 1" deep saw cut to be made at surface before concrete is removed.
 - Notation: Sq. ft. - Square Feet, typ. - Typical, Exist. - Existing.

- Legend
- Existing portions to be removed (reinforcing to be salvaged as indicated in plans).
 - Existing areas to be repaired per item 519- patching concrete structures

CT COLPETZER-THOMAS, INC. AN ENGINEERING GROUP		24/78
WILLOUGHBY • MENTOR • NORTH CANTON • STEUBENVILLE • LORAIN		
ABUTMENT DEMOLITION AND REPAIR		
BRIDGE NO. LAK-2-0363 R OVER BEIDLER ROAD		
LAKE COUNTY		
DESIGNED	DRAWN	TRACED
B.J.A.	R.L.B.	R.L.B.
CHECKED	REVIEWED	DATE
R.J.C.	J.E.A.	11/15/88
REVISED		