

SEEDING
END WIDTH SQ YDS

FED. RD. DIVISION STATE PROJECT
2 OHIO
127-313

LAKE COUNTY
LAK-2-16.49


Frontage Road 'B'

Station	seeding end width	sq yds	end area cut	end area fill	volume cut	volume fill
99+72	79	142	296			
99+22	78	436	146	102	267	369
99+05				0		45
98+75	46	331	136		251	
98+72	46	26	122		24	

Frontage Road 'B' E Work is computed using Reconst. U.S. 20 cross section intervals

Frontage Road 'B'

Station	seeding end width	sq yds	end area cut	end area fill	volume cut	volume fill
98+25	45	238	108	200		

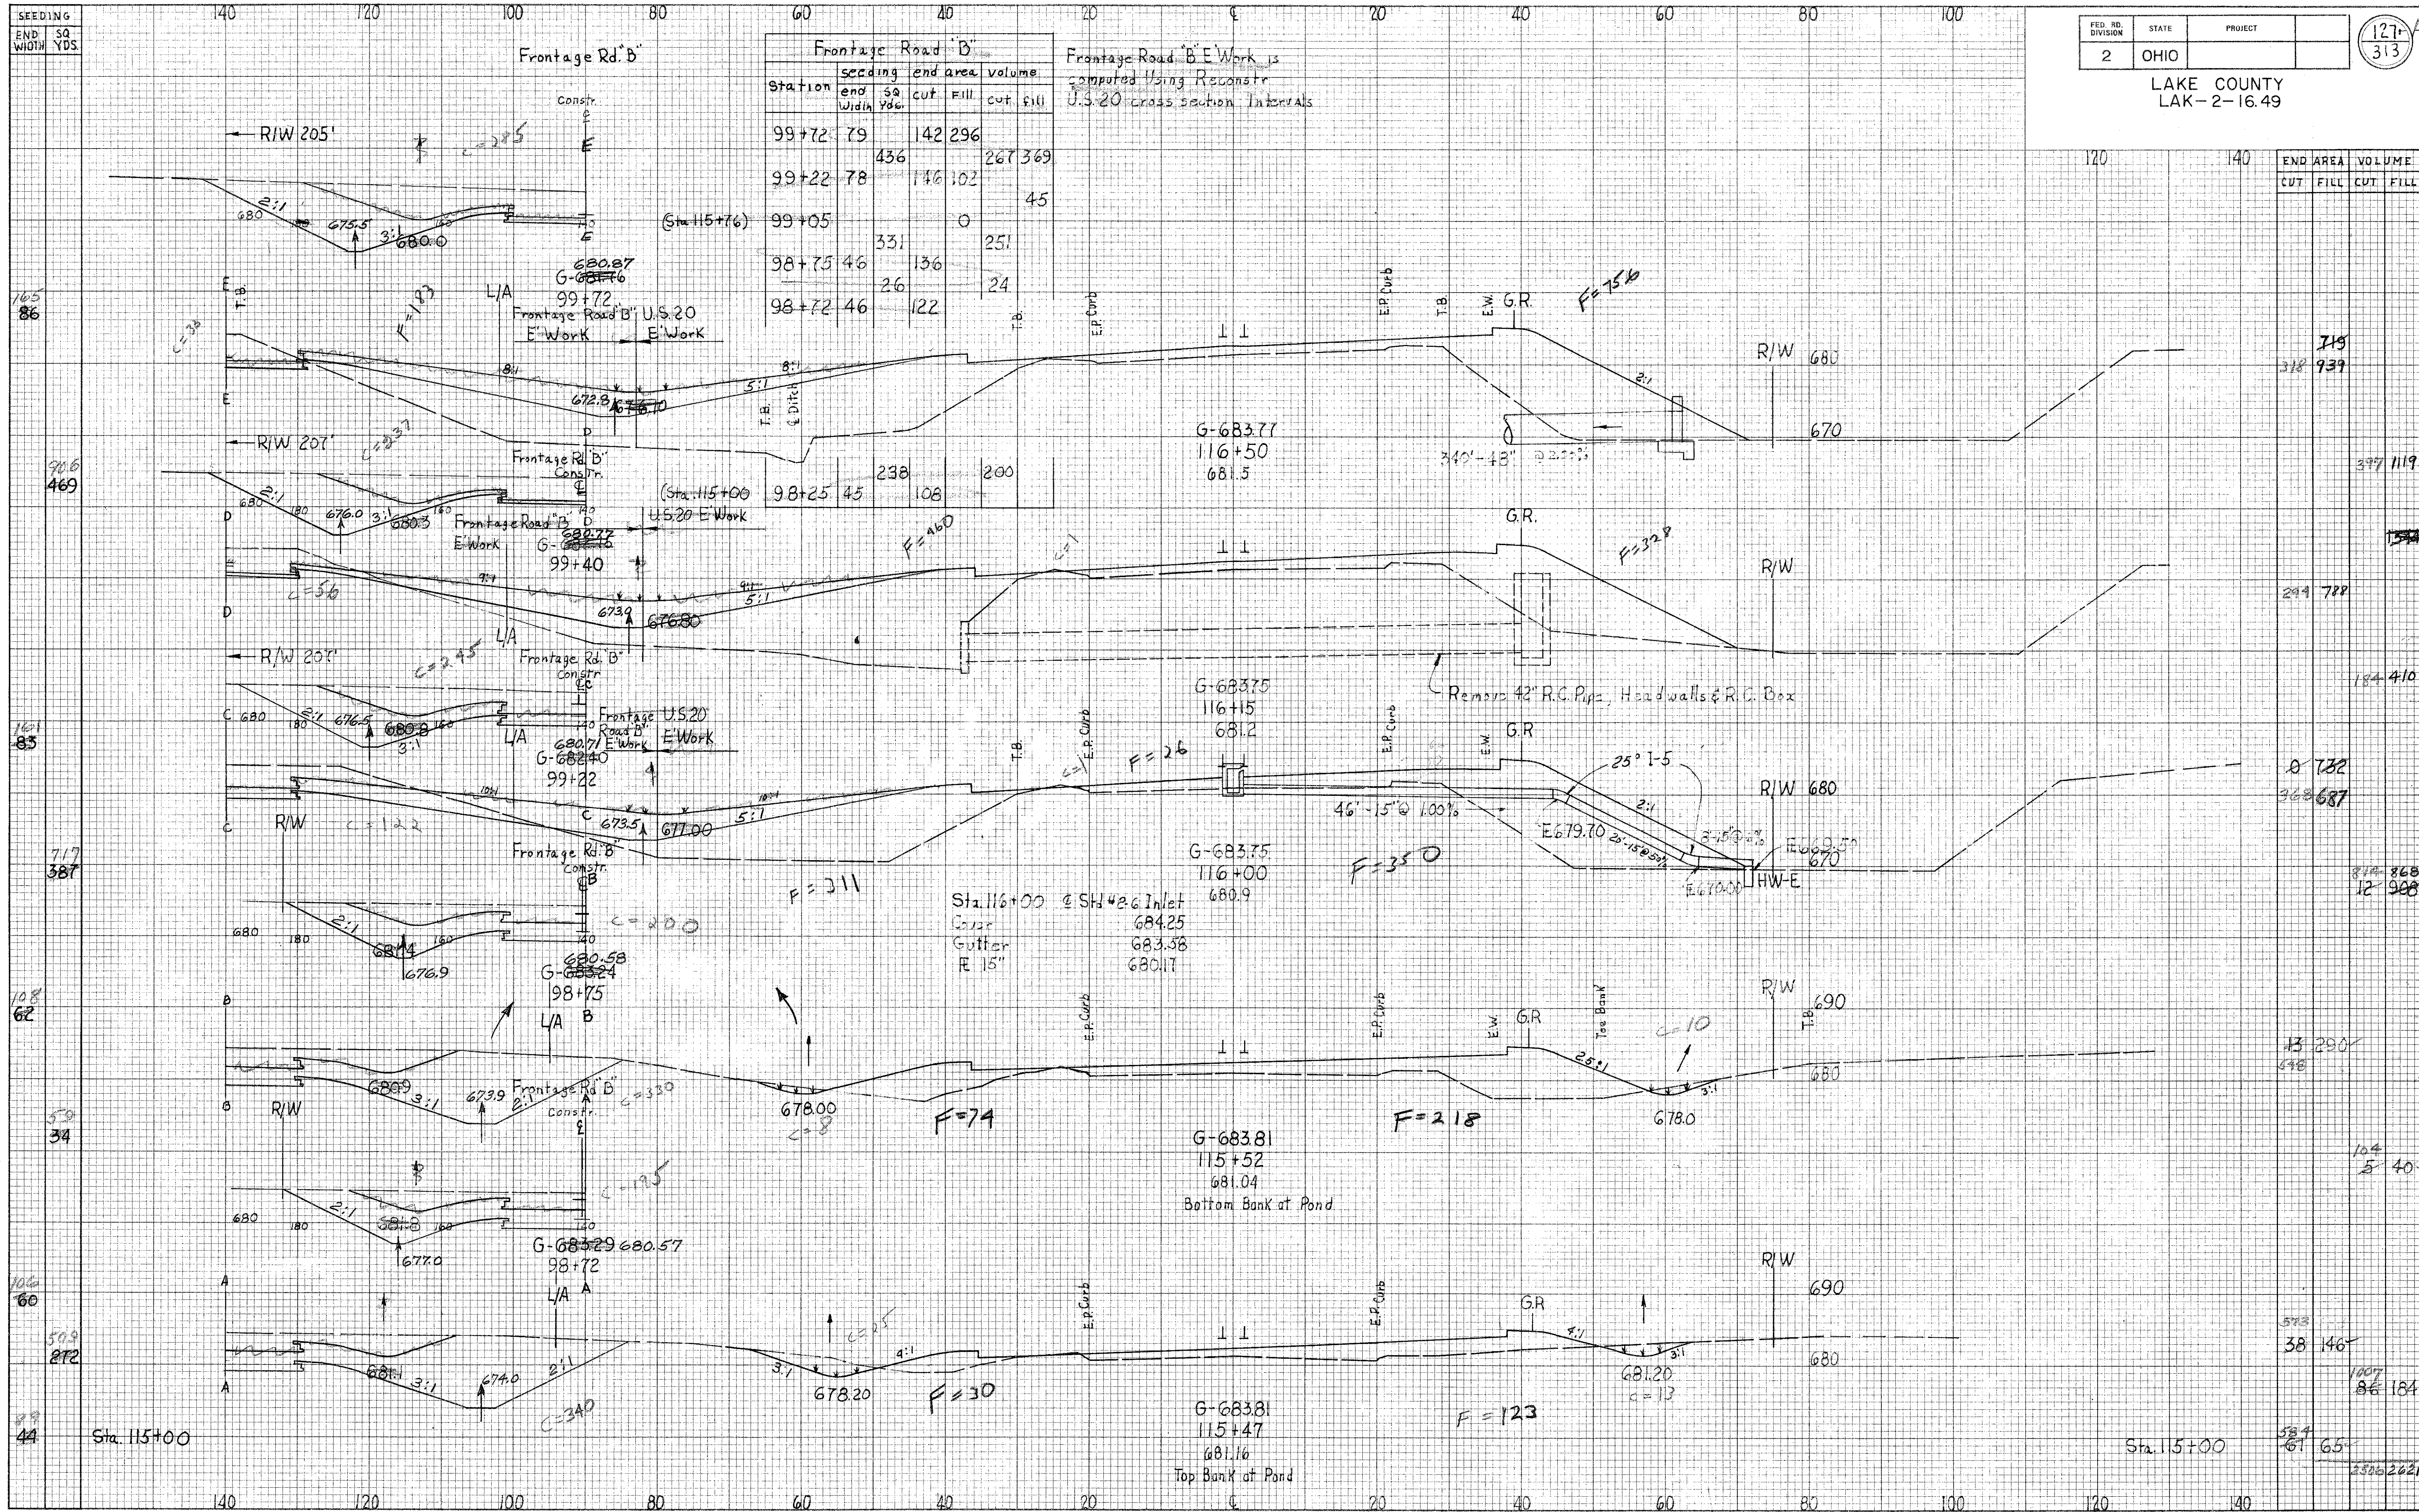

Station	End Area Cut	End Area Fill	Volume Cut	Volume Fill
115+00	318	719	939	
115+05	397	1119		154
115+10	294	788		184
115+15	184	410		732
115+20	368	687		968
115+25	13	290		40
115+30	38	146		184
115+35	61	65		262