


TYPICAL SECTIONS

2 - 26'-0" PAVEMENTS

TYPE T-71 REINFORCED CONCRETE PAVEMENT

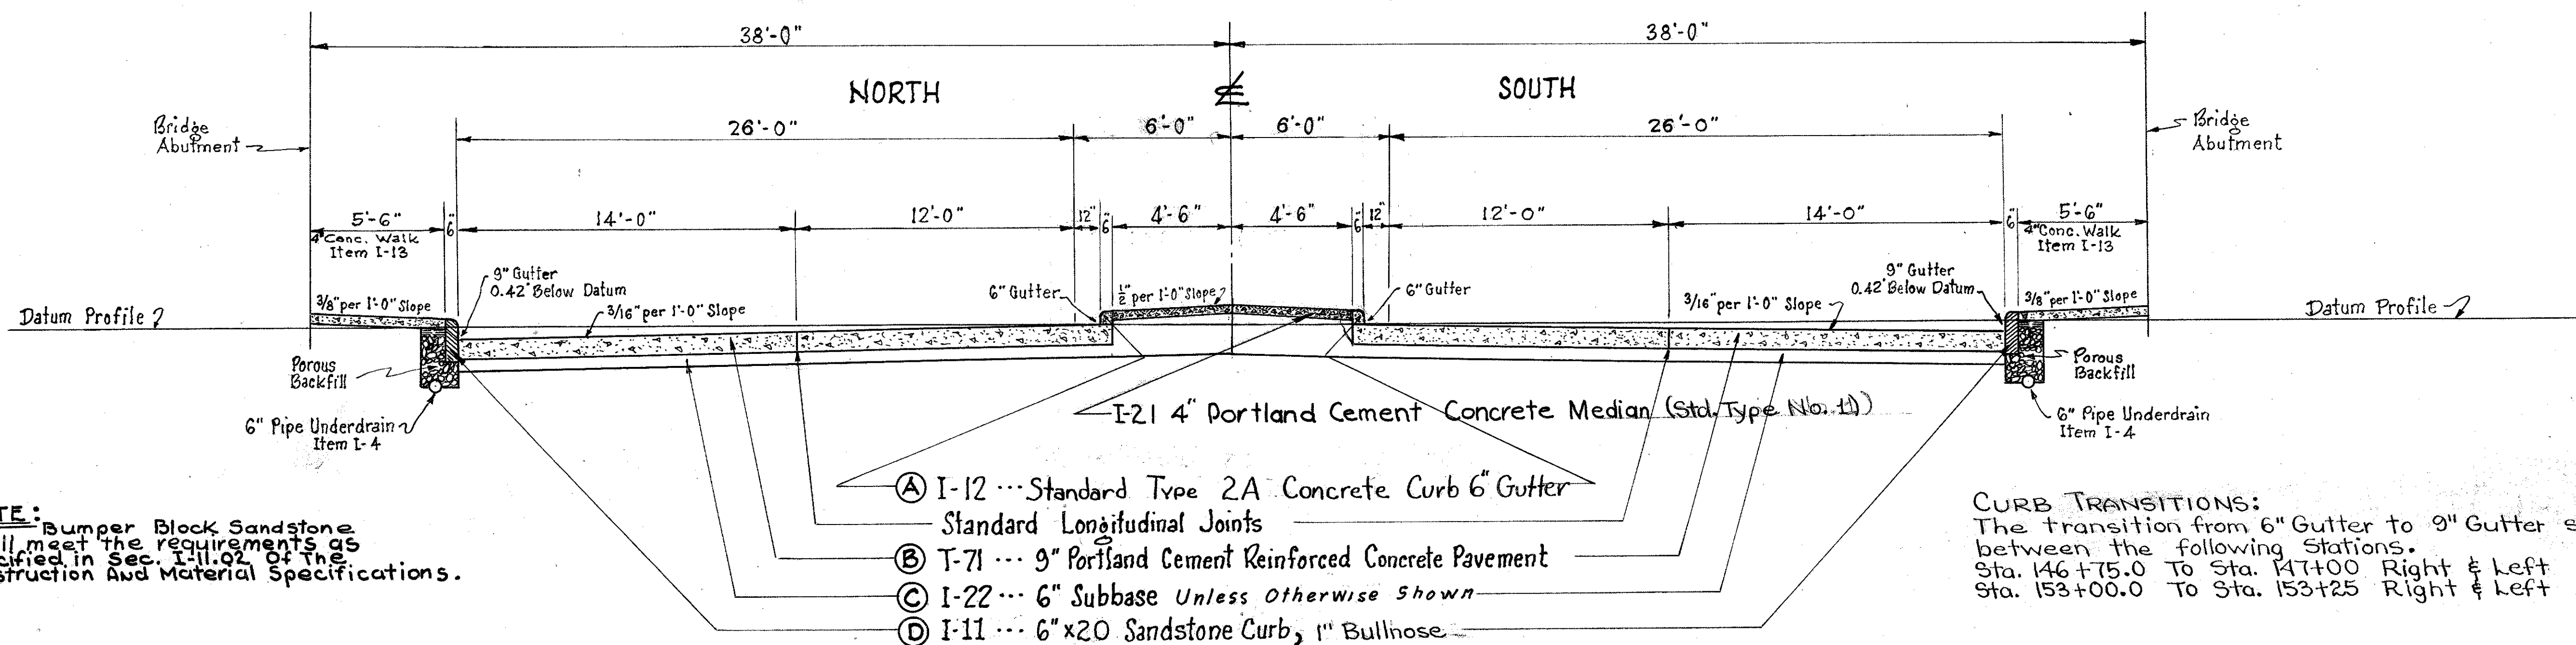



NOTE: Bumper Block Sandstone shall meet the requirements as specified in Sec. I-11.02 of the Construction and Material Specifications.

CURB TRANSITIONS:
The transition from 6" Gutter to 9" Gutter shall be made between the following Stations:
Sta. 146+75.0 To Sta. 147+00 Right & Left
Sta. 153+00.0 To Sta. 153+25 Right & Left


- Ⓐ I-12 ... Standard Type 2A Concrete Curb 6" Gutter
Standard Longitudinal Joints
- Ⓑ T-71 ... 9" Portland Cement Reinforced Concrete Pavement
- Ⓒ I-22 ... 6" Subbase Unless Otherwise Shown
- Ⓓ I-11 ... 6"x20 Sandstone Curb, 1" Bullnose

VINE STREET

SCALE = 1/4" = 1'-0"
STA. 147+00 to STA. 153+00

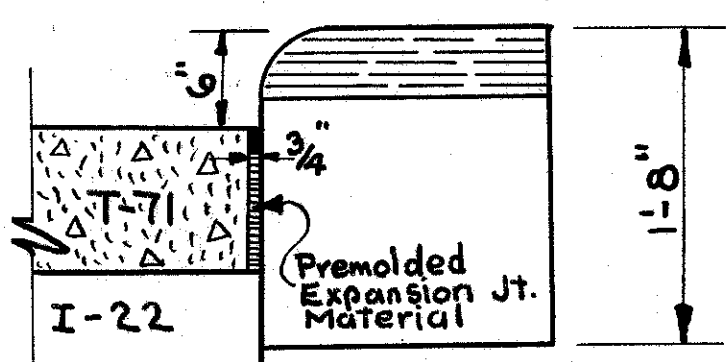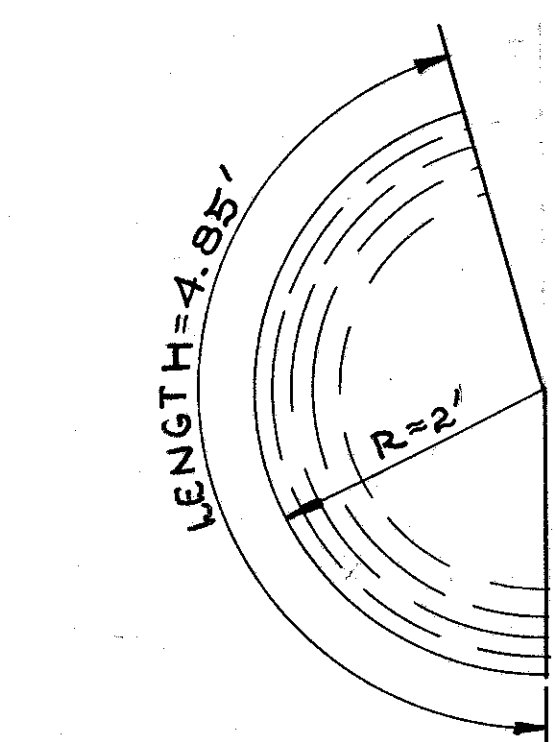

BUMPER BLOCK DETAIL

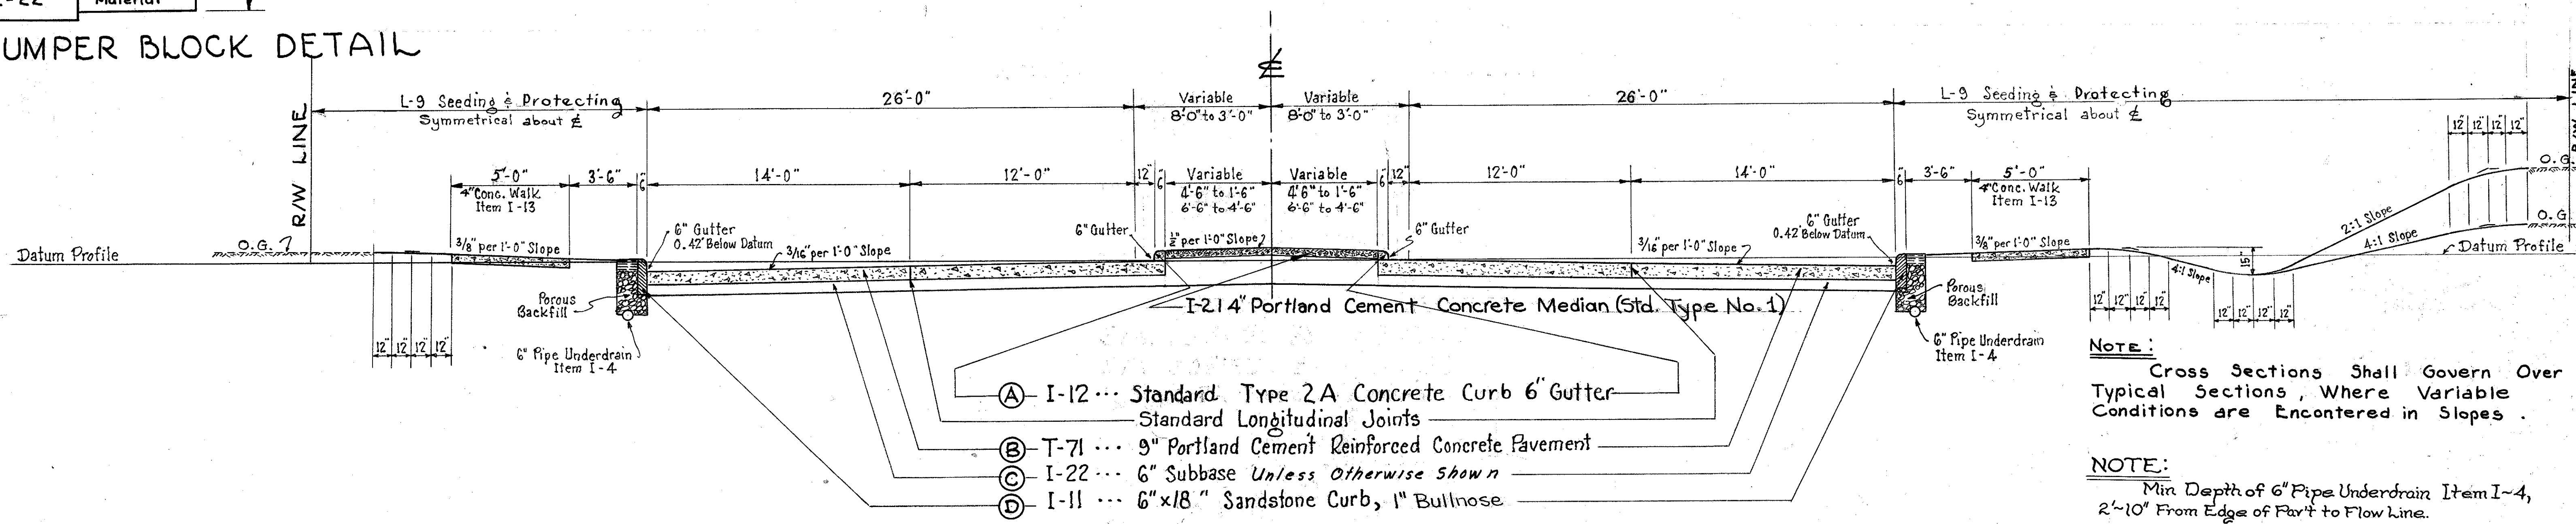

- Ⓐ I-12 ... Standard Type 2A Concrete Curb 6" Gutter
Standard Longitudinal Joints
- Ⓑ T-71 ... 9" Portland Cement Reinforced Concrete Pavement
- Ⓒ I-22 ... 6" Subbase Unless Otherwise Shown
- Ⓓ I-11 ... 6"x18 Sandstone Curb, 1" Bullnose

NOTE: Cross Sections Shall Govern Over Typical Sections, Where Variable Conditions are Encountered in Slopes.

NOTE: Min Depth of 6" Pipe Underdrain Item I-4, 2'-10" From Edge of Pav't to Flow Line.

VINE STREET

SCALE : 1/4" = 1'-0"
STA. 153+00 to STA. 157+31.51
STA. 139+13.50 to STA. 143+00