

TYPICAL SECTIONS


TYPE T-71

SCALE: $\frac{3}{8}''=1'-0''$


FED. RD. DIVISION	STATE	PROJECT	
2	OHIO		

2
33

LAKE COUNTY
LAK. 84-19.26

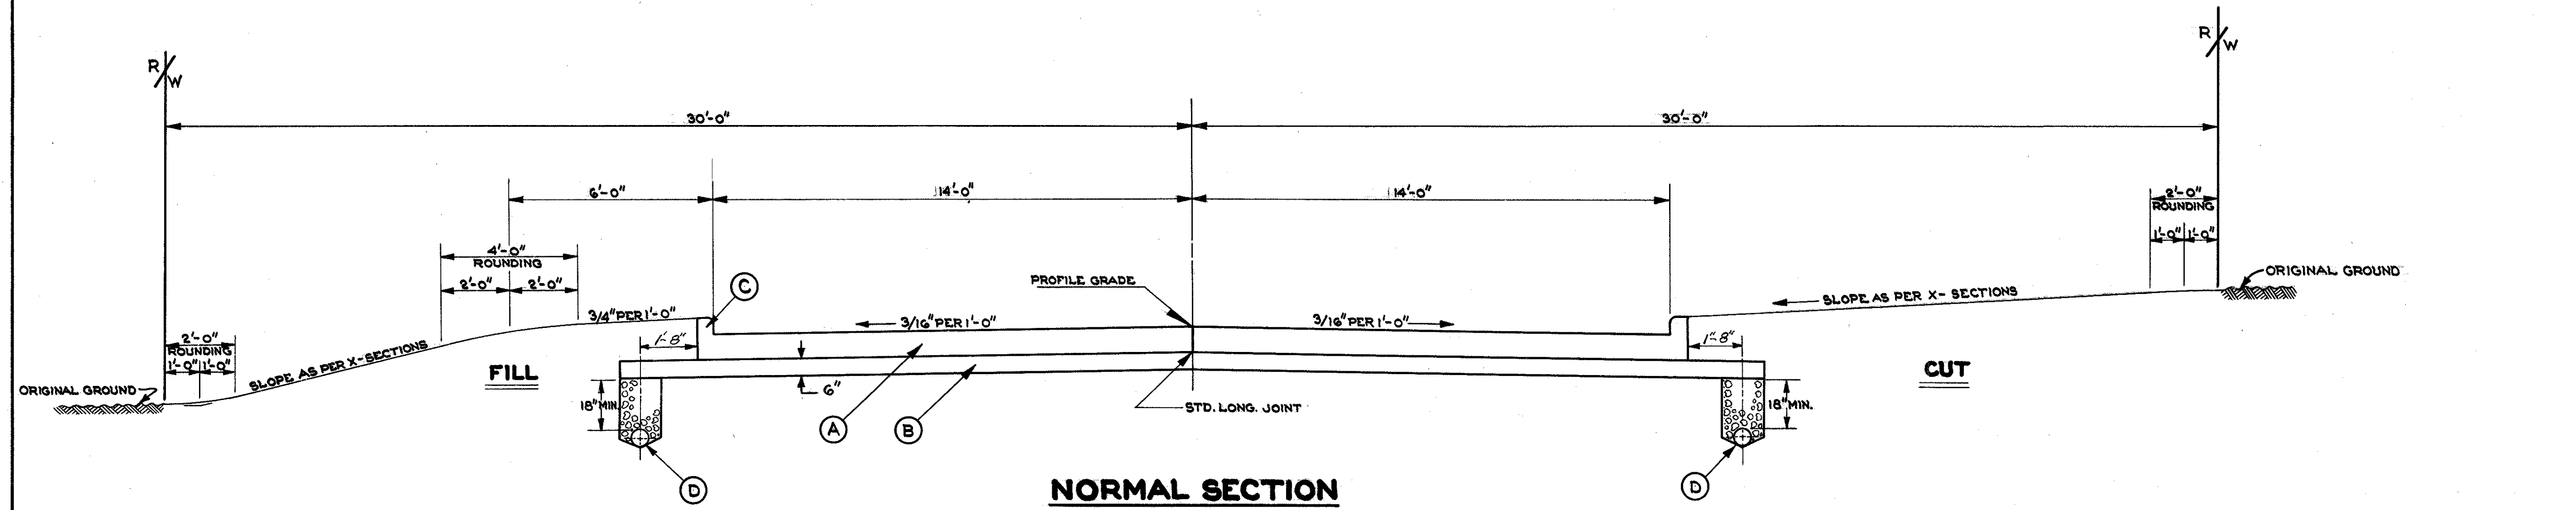

NORMAL SECTION
LIMITING STATIONS
STA. 72+28.00 TO STA. 85+50.00

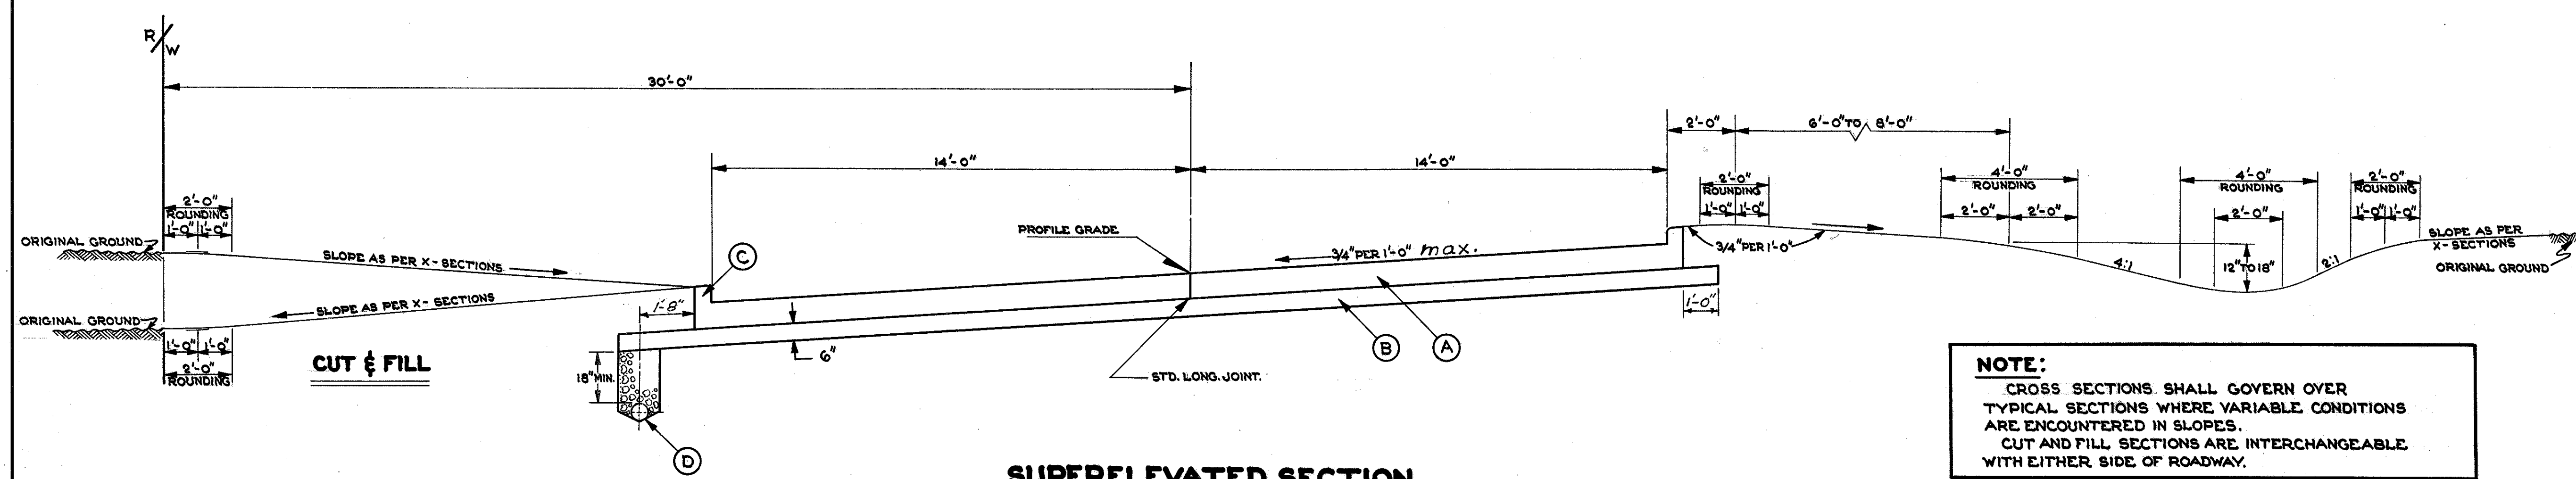

SUPERELEVATED SECTION
LIMITING STATIONS
STA. 85+50 TO STA. 98+00

- LEGEND**
- (A) T-71 9" REINFORCED PORTLAND CEMENT CONCRETE PAVEMENT
 - (B) I-22 6" SUBBASE, GRADING "A" OR "B"
 - (C) I-12 CONCRETE CURB, STANDARD TYPE 2-A
 - (D) I-1 6" PIPE, CLASS I-3

NOTE:
CROSS SECTIONS SHALL GOVERN OVER TYPICAL SECTIONS WHERE VARIABLE CONDITIONS ARE ENCOUNTERED IN SLOPES.
CUT AND FILL SECTIONS ARE INTERCHANGEABLE WITH EITHER SIDE OF ROADWAY.

TRANSITION SECTION
NORMAL TO SUPER: STA. 85+50 TO STA. 88+00 } SEE SUPERELEVATION TABLE THIS SHEET
SUPER TO NORMAL: STA. 95+50 TO STA. 98+00 }

STATION	PAVEMENT ELEVATIONS		
	LT. EDGE	C	RT. EDGE
85+50	711.17	711.39	711.17
85+75	711.42	711.64	711.48
86+00	711.67	711.89	711.79
86+25	711.92	712.14	712.10
86+40	712.07	712.29	712.29
86+50	712.17	712.39	712.44
86+75	712.42	712.64	712.81
86+85	712.52	712.74	712.96
87+00	712.58	712.89	713.20
87+25	712.69	713.14	713.59
87+50	712.80	713.39	713.98
87+75	712.91	713.64	714.37
88+00	713.01	713.89	714.77
88+25	713.26	714.14	715.02
88+50	713.51	714.39	715.27
88+75	713.76	714.64	715.52
89+00	714.01	714.89	715.77
89+25	714.26	715.14	716.02
89+50	714.51	715.39	716.27
89+75	714.76	715.64	716.52
90+00	715.01	715.89	716.77
90+25	715.26	716.14	717.02
90+50	715.51	716.39	717.27
90+75	715.76	716.64	717.52
91+00	716.01	716.89	717.77
91+25	716.26	717.14	718.02
91+50	716.51	717.39	718.27
91+75	716.76	717.64	718.52
92+00	717.01	717.89	718.77
92+25	717.26	718.14	719.02
92+50	717.51	718.39	719.27
92+75	717.76	718.64	719.52
93+00	718.01	718.89	719.77
93+25	718.26	719.14	720.02
93+50	718.51	719.39	720.27
93+75	718.76	719.64	720.52
94+00	719.01	719.89	720.77
94+25	719.26	720.14	721.02
94+50	719.51	720.39	721.27
94+75	719.76	720.64	721.52
95+00	720.01	720.89	721.77
95+25	720.26	721.14	722.02
95+50	720.51	721.39	722.27
95+75	720.90	721.64	722.38
96+00	721.29	721.89	722.49
96+25	721.68	722.14	722.60
96+50	722.07	722.39	722.71
96+65	722.32	722.54	722.76
96+75	722.42	722.64	722.81
97+00	722.67	722.89	722.94
97+10	722.77	722.99	722.99
97+25	722.92	723.14	723.10
97+50	723.17	723.39	723.29
97+75	723.42	723.64	723.48
98+00	723.67	723.89	723.67