

SEE SIDE ROAD SHEET NO. 229

FOR PROFILE RELOC.
KELLOGG RD. SEE
SHEET NO. 230

27	306
----	-----

LAKE COUNTY
LAK-I-10.38

(S) STRUCTURES

REF. NO.	STATION	SIDE	E-2	E-3	L-10	I-10	S-1	S-4	S-27	
			EXC. FOR STRUCT.	CHANNEL EXC.	SODDING	DUMPED ROCK CHANNEL PROTECT.	CONC. FOR STRUCT. CLASS	REINF. STEEL	24" PIPE FOR ROWY. CULVERTS SEC. M-6.8(b) or M-6.8(b)	
FROM			C.Y.	C.Y.	S.Y.	C.Y.	C.Y.	LBS.	L.F.	
I-S	298+72	CL	60	8	14	16	10.5	0.82	436	176

(P) PAVEMENT


REF. NO.	STATION	SIDE	ROAD MIX BIT. MATL.		SEAL COAT BIT. MATL.		T-32 # 46 AGGR. FOR ROAD MIX		# 6 AGGR. FOR CHOKE		# 6 AGGR. FOR SEAL COAT		T-30 BIT. PRIME COAT	B-19 5" CRUSHED AGGR. BASE COURSE	I-22 4" SUB-BASE	E-1 COMP. SUB-GRADE	I-9 STONE UNDER DRAIN (NO. 2)
			GAL.	GAL.	GAL.	GAL.	C.Y.	C.Y.	C.Y.	C.Y.	GAL.	C.Y.	S.Y.	L.F.			
1-P	88+00	LT	1920	533	119	9	17	853	315	267	2133	432					
2-P	96+50	LT	82	23	5	1	1	36	13	91							
TOTALS			2002	556	124	10	18	889	328	267	2224	432					

(D) DRAINAGE

REF. NO.	STATION	SIDE OR	6" PIPE UNDERDRAIN		8" PIPE OUTLET PIPE SEC. M-6.4(d)	I-5 6" BEND		I-5 6" WYE	L-10 SODDING	S-29 DRAINAGE OF STRUCT. NO. 2 AGGR.
			SHALLOW	DEEP		EA	EA			
FROM			L.F.	L.F.	C.Y.	S.Y.	C.Y.	S.Y.	L.F.	
I-D	290+00	300+00	LT		1068	10	1			0.3
2-D	290+00	300+00	LT	1034		10	2			0.3
3-D	290+00	300+00	RT	996			1			
4-D	290+00	300+00	RT		1030					
5-D	290+00	299+60	RT						1046	
6-D	296+50	298+75	CL						402	
7-D	297+50	298+75	CL						111	

(R) ROADWAY

REF. NO.	STATION		SIDE	L-6
	FROM	TO		ROADSIDE CLEANUP
FROM			UNITS	
I-R	290+00	300+00	CL	82
TOTAL				82

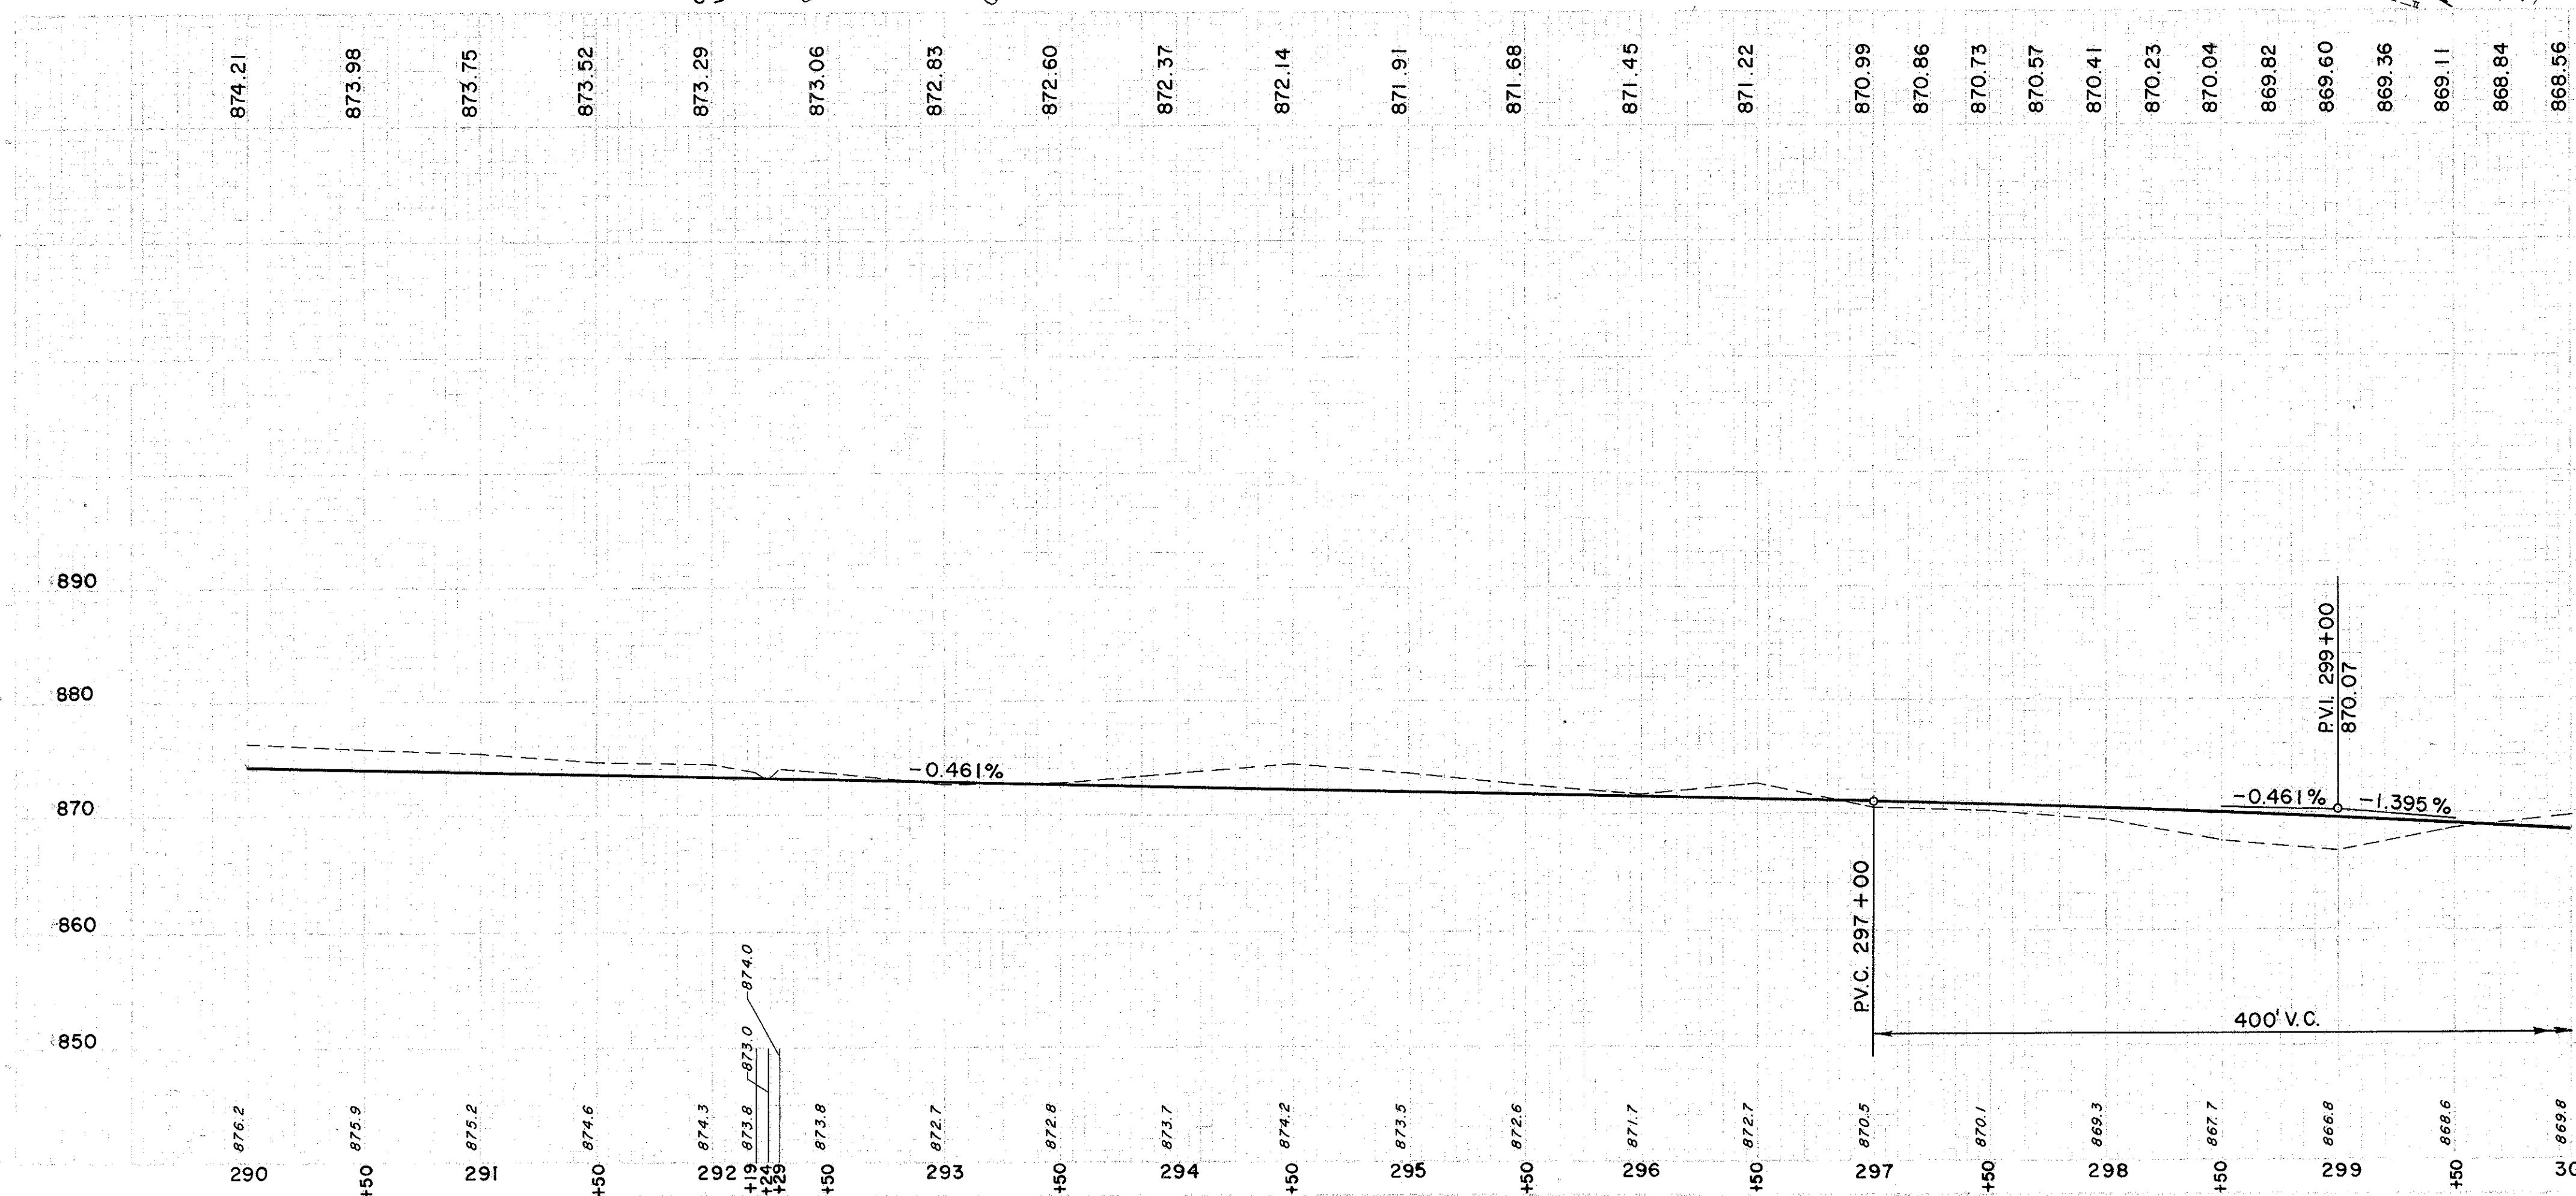

STA. 90+00 TO STA. 100+00 KELLOGG RD.	
EXCAVATION	= 989 C.Y.
EMBANKMENT	= 1622 C.Y.
EMBANKMENT + 18 %	= 1914 C.Y.
STA. 290+00 TO STA. 300+00	
EXCAVATION	= 23,640 C.Y.
EMBANKMENT	= 5,256 C.Y.
EMBANKMENT	= 18
EMBANKMENT	= 6,202 C.Y.

STA. 290+00 TO STA. 300+00