


LAKE COUNTY
SH 2 SEC WICKLIFFE, WILLOWICK,
I.B. & WILLOUGHBY (Pt)
ROADSIDE IMPROVEMENT

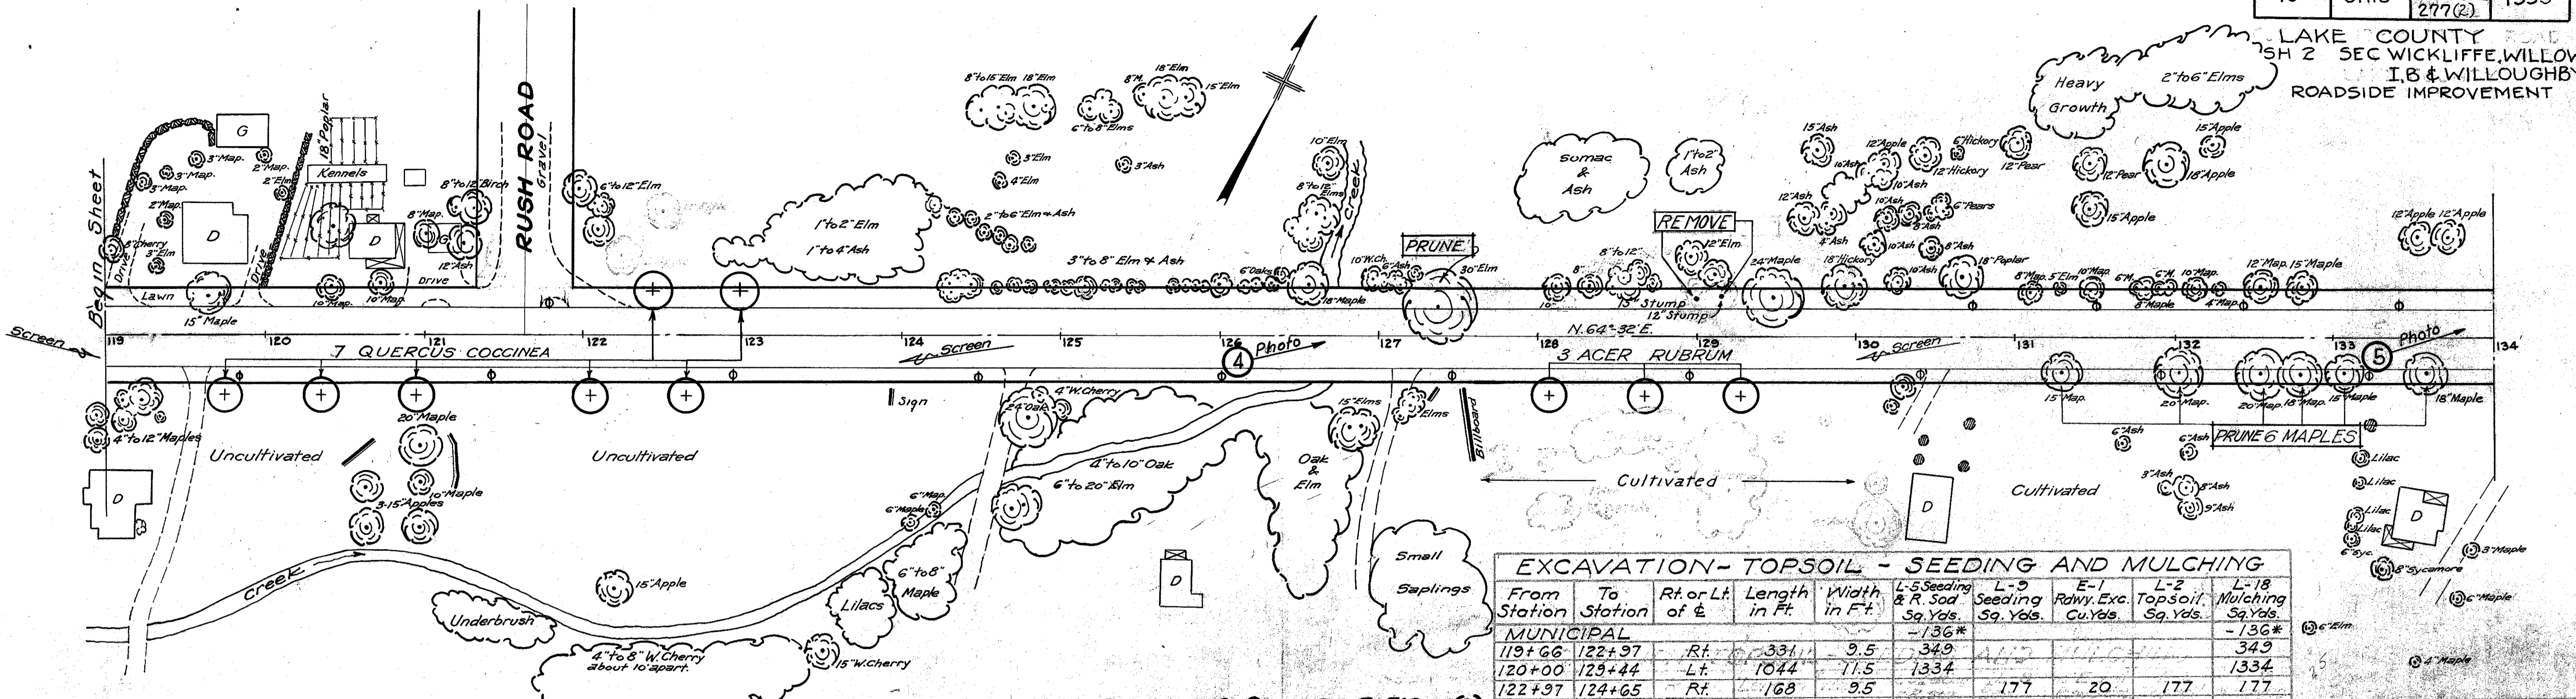

QUANTITIES FOR SHEET NO 8 F.A.P. 519-A(2)

Item	Quantity	Unit	Materials
L-14	7	Each	Quercus Coccinea (Scarlet Oak) 1 1/2" to 1 3/4" cal.
L-14	3	Each	Acer Rubrum (Red Maple) 1 1/2" to 1 3/4" cal.
L-9	177	101	Sq. Yds. Seeding
E-1	20	11	Cu. Yds. Roadway excavation (unclassified)
L-5	3655	432	Sq. Yds. Seeding and renovating existing sod
L-2	177	101	Sq. Yds. Topsoil furnished & placed (areas seeded under L-9)
L-18	3332	533	Sq. Yds. Straw Mulch (including stabilizing)

Item	Quantity	Unit	Materials
L-9	329	39	Lbs. Commercial Fertilizer #2 @ 10 lbs. per 1000 sq ft.
L-9	32	18	Lbs. Commercial Fertilizer #1 @ 20 lbs. per 1000 sq ft.
L-17	2	3	Each Pruning existing trees 12 inch
L-17	4	25	Each Pruning existing trees 20 inch
L-17	1	Each	Pruning existing trees 30 inch
E-9	2	2	Each Trees & Stumps to be removed & disposed of

EXCAVATION - TOPSOIL - SEEDING AND MULCHING									
From Station	To Station	Rt. or Lt.	Length in Ft.	Width in Ft.	L-5 Seeding & R. Sod Sq. Yds.	L-9 Seeding Sq. Yds.	E-1 Rdwy. Exc. Cu. Yds.	L-2 Topsoil Sq. Yds.	L-18 Mulching Sq. Yds.
MUNICIPAL									
119+66	122+97	Rt.	331	9.5	349				349
120+00	123+44	Lt.	1044	11.5	1334				1334
122+97	124+65	Rt.	168	9.5		177	20	177	177
124+80	142+44	Rt.	1764	9.5	1862				1862
132+80	134+35	Lt.	155	11.5	198				198
135+95	136+67	Lt.	72	6	48				48
TOTAL MUNICIPAL					3655	177	20	177	3832
RURAL									
136+67	137+20	Lt.	53	6	35				35
139+42	141+27	Lt.	285	11.5	364				364
141+27	142+54	Lt.	127	6	85				85
142+44	142+95	Rt.	51	9.5	54				54
144+15	144+60	Lt.	45	6	30				30
144+60	146+12	Lt.	152	6		101	11	101	101
TOTAL RURAL					432	101	11	101	533
TOTAL MUNICIPAL & RURAL					4087	278	31	278	4365

TREES REMOVED & DISPOSED OF Station Side Size Number				
MUNICIPAL				
123+00	Lt.	15"	1	
123+15	Lt.	12"	1	
TOTAL MUNICIPAL				
RURAL				
137+11	Rt.	18"	1	
138+10	Rt.	12"	1	
TOTAL RURAL				
TOTAL MUN. & RURAL 12" 15" 18"				

