


TYPICAL SECTIONS

FED. RD. DIVISION	STATE	PROJECT	
2	OHIO	ACI-1103 (21)	8 488

LAKE COUNTY
LAK-1-12.89

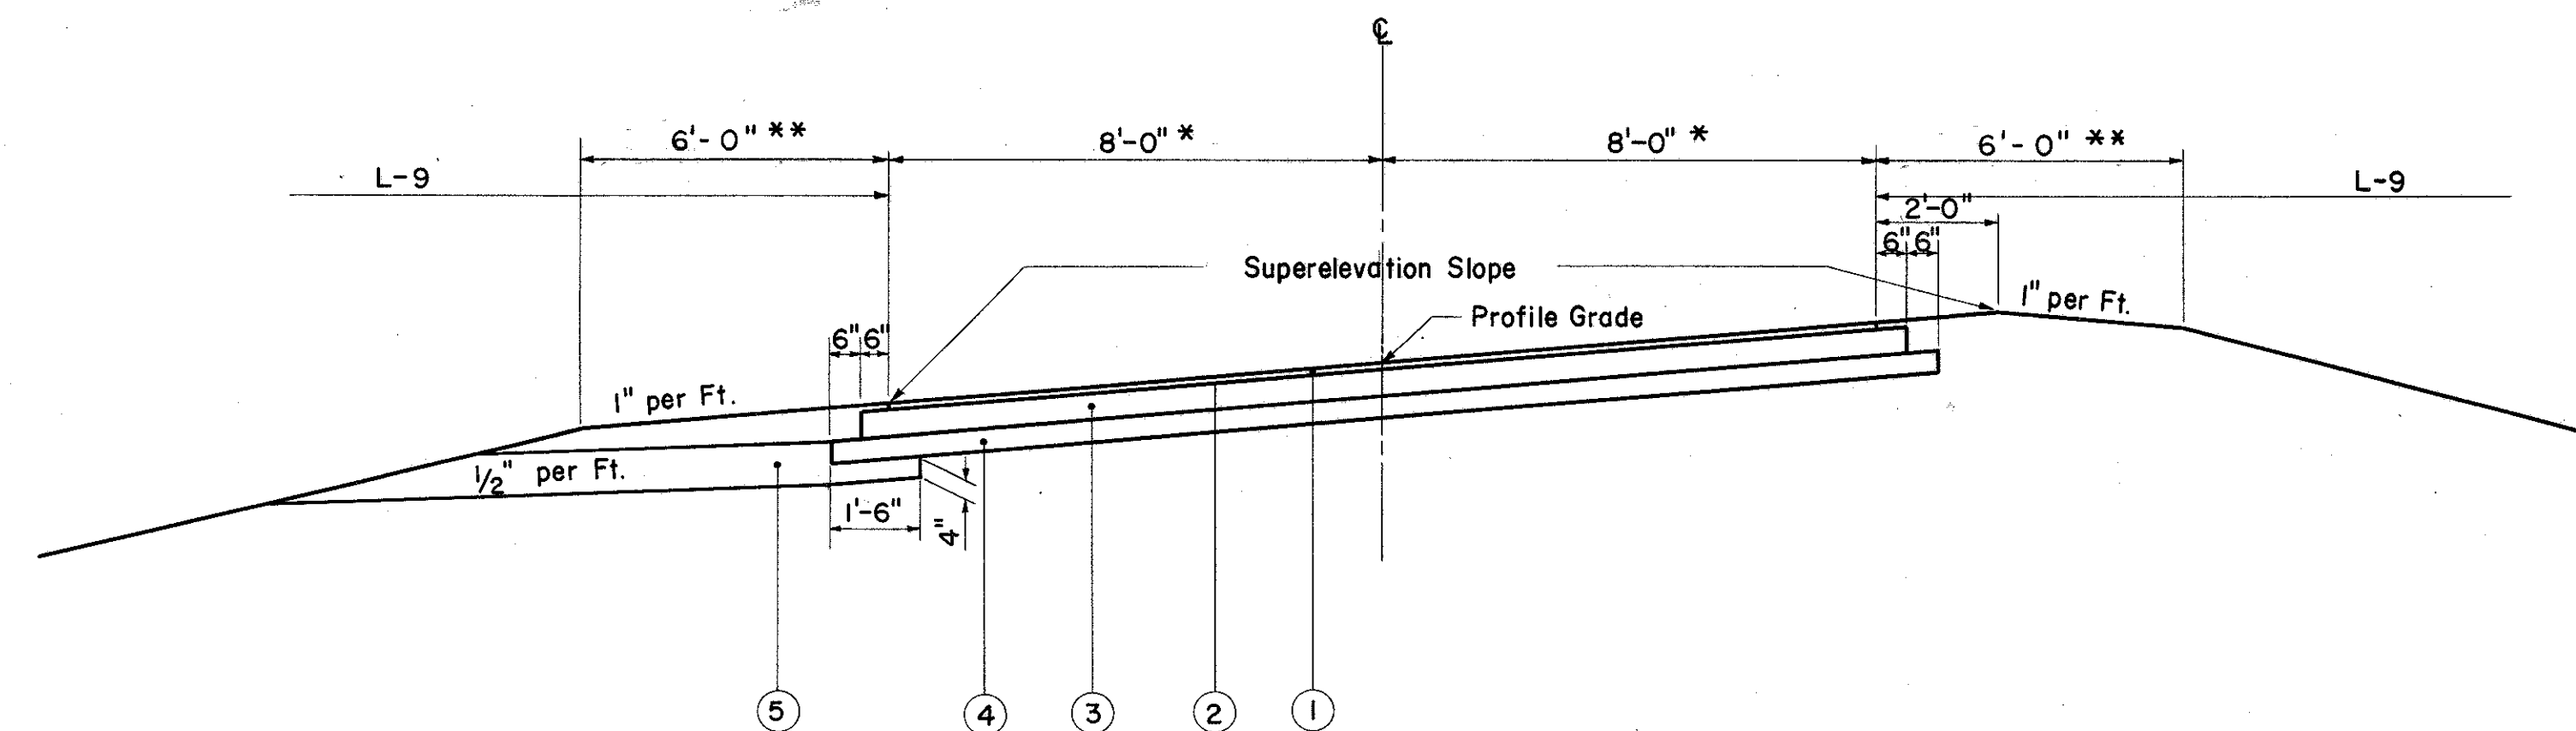

SUPERELEVATED
HUNTOON ROAD &
CONCORD ROAD

LEGEND

① T-32 Bituminous Road Mix, Method "B" or "C" using .056 Cu. Yd. No. 46 Aggregate per Sq. Yd. and 0.9 Gal. M-5.2, RC-2-3, or Sec. M-5.3, MC 4-5, or Sec. M-5.7, RT-8-9 per Sq. Yd.


Bituminous Choke & Seal Coat using 0.004 Cu. Yd. No. 6 Aggregate per Sq. Yd. for Choke, 0.008 Cu. Yd. No. 6 Aggregate per Sq. Yd. for Seal and 0.25 Gal. Sec. M-5.7, RT-9 or RT-10 or Sec. M-5.2, RC-3-4 or Sec. M-5.3, MC 4-5, per Sq. Yd. for Seal.

② T-30 Bituminous Prime Coat Sec. M-5.3, MC-0 or MC-1 or Sec. M-5.7, RT-2 or 3 Applied at the rate of 0.35 Gal. per Sq. Yd.

③ B-119 5" Crushed Aggregate Base Course.

④ I-22 4" Subbase

⑤ I-9 Stone Underdrain (No.2) Staggered at 50' Intervals or as directed by the Engineer.

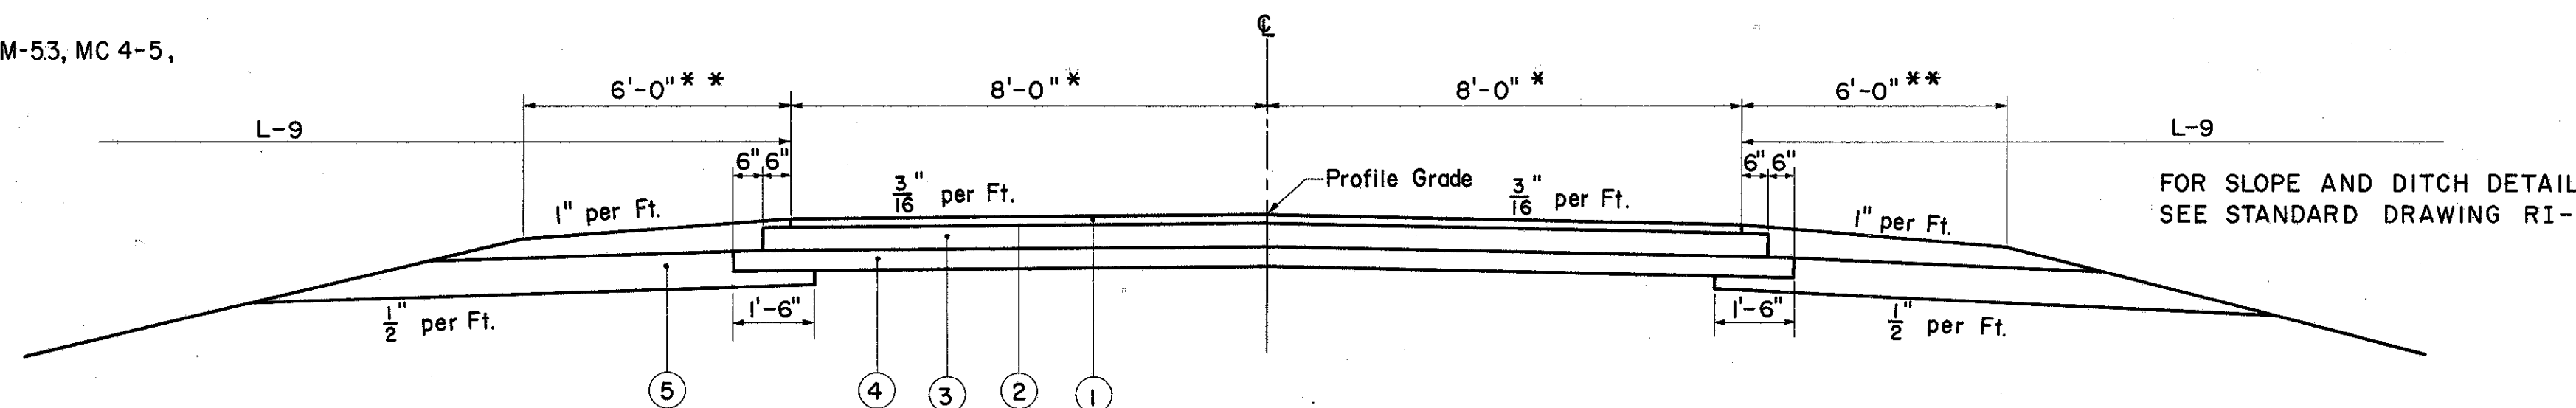

TYPICAL NORMAL SECTION
HUNTOON ROAD &
CONCORD ROAD

* 9'-0" on Concord Road
** 5'-0" on Concord Road

FOR SLOPE AND DITCH DETAILS
SEE STANDARD DRAWING R1-1

LIMITING STATIONS

HUNTOON RD.

STA. 87+01.15 TO STA. 93+24.55	623.40 LIN. FT.
STA. 100+35.30 TO STA. 106+20.52	585.22 LIN. FT.
TOTAL	1208.62 LIN. FT.

CONCORD RD.

STA. 85+45.37 TO STA. 88+54.81	309.44 LIN. FT.
STA. 107+98.33 TO STA. 113+00	501.67 LIN. FT.
TOTAL	811.11 LIN. FT.


LIMITING STATIONS

HUNTOON RD.

STA. 86+86.12 TO STA. 87+01.15	15.03 LIN. FT.
STA. 93+24.55 TO STA. 100+35.30	710.75 LIN. FT.
STA. 106+20.52 TO STA. 109+50.98	330.46 LIN. FT.
TOTAL	1056.24 LIN. FT.

CONCORD RD.

STA. 78+17.00 TO STA. 85+45.37	728.37 LIN. FT.
STA. 88+54.81 TO STA. 107+98.33	1943.52 LIN. FT.
TOTAL	2671.89 LIN. FT.

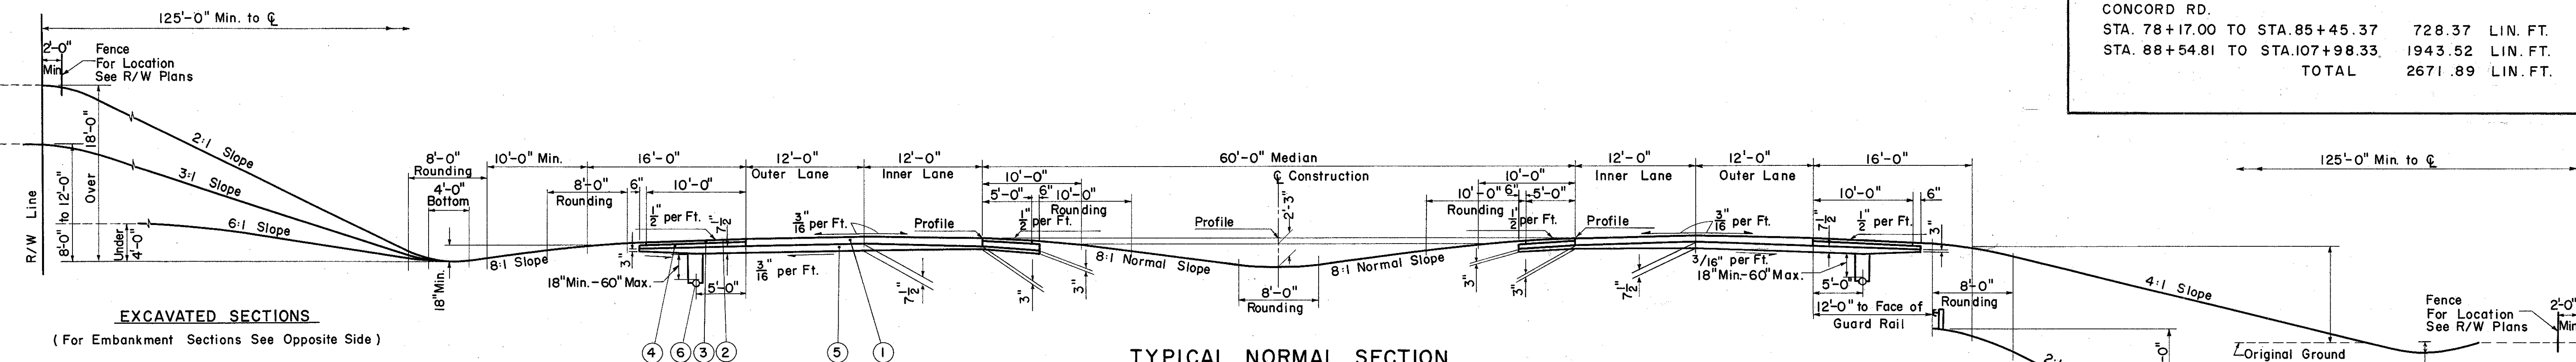

TYPICAL NORMAL SECTION
RELOC. S. R. 44

EXCAVATED SECTIONS

(For Embankment Sections See Opposite Side)

LEGEND

① T-71 9" Reinforced Portland Cement Pavement.

② T-31 Bituminous Surface Treatment

③ B-33 3" Bituminous Macadam Base Course

④ I-18 5" Stabilized Crushed Aggregate Shoulder

⑤ I-22 Variable Depth Subbase

⑥ I-4 6" Pipe Underdrain

EMBANKMENT SECTIONS

(For Excavated Sections See Opposite Side)

LIMITING STATIONS

RELOC. S. R. 44

STA. 118+01.12 TO STA. 131+17.31	1316.19 LIN. FT.
DEDUCT FOR BRIDGE	315.70 LIN. FT.
TOTAL	1000.49 LIN. FT.