
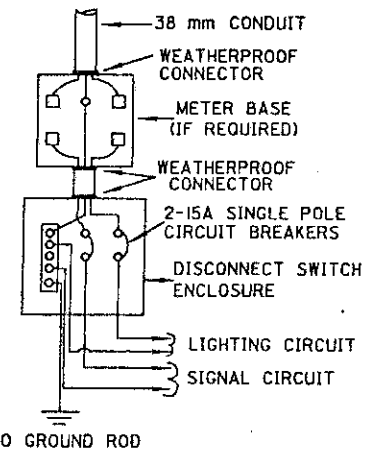


AREA ILLUMINATION SHALL BE PROVIDED BY USING 150 WATT MINIMUM HIGH PRESSURE SODIUM LUMINAIRES OR 250 WATT MINIMUM MERCURY LUMINAIRES


MINIMUM MOUNTING HEIGHT 8.2 m LUMINAIRE TO EXTEND TO AT LEAST THE EDGE OF PAVEMENT.

ON BRIDGE PROJECT CABLE MAY ALSO BE ROUTED UNDER BRIDGE IF PROPERLY SUPPORTED. SEE DETAIL "C"

ALL 305 mm LENSES

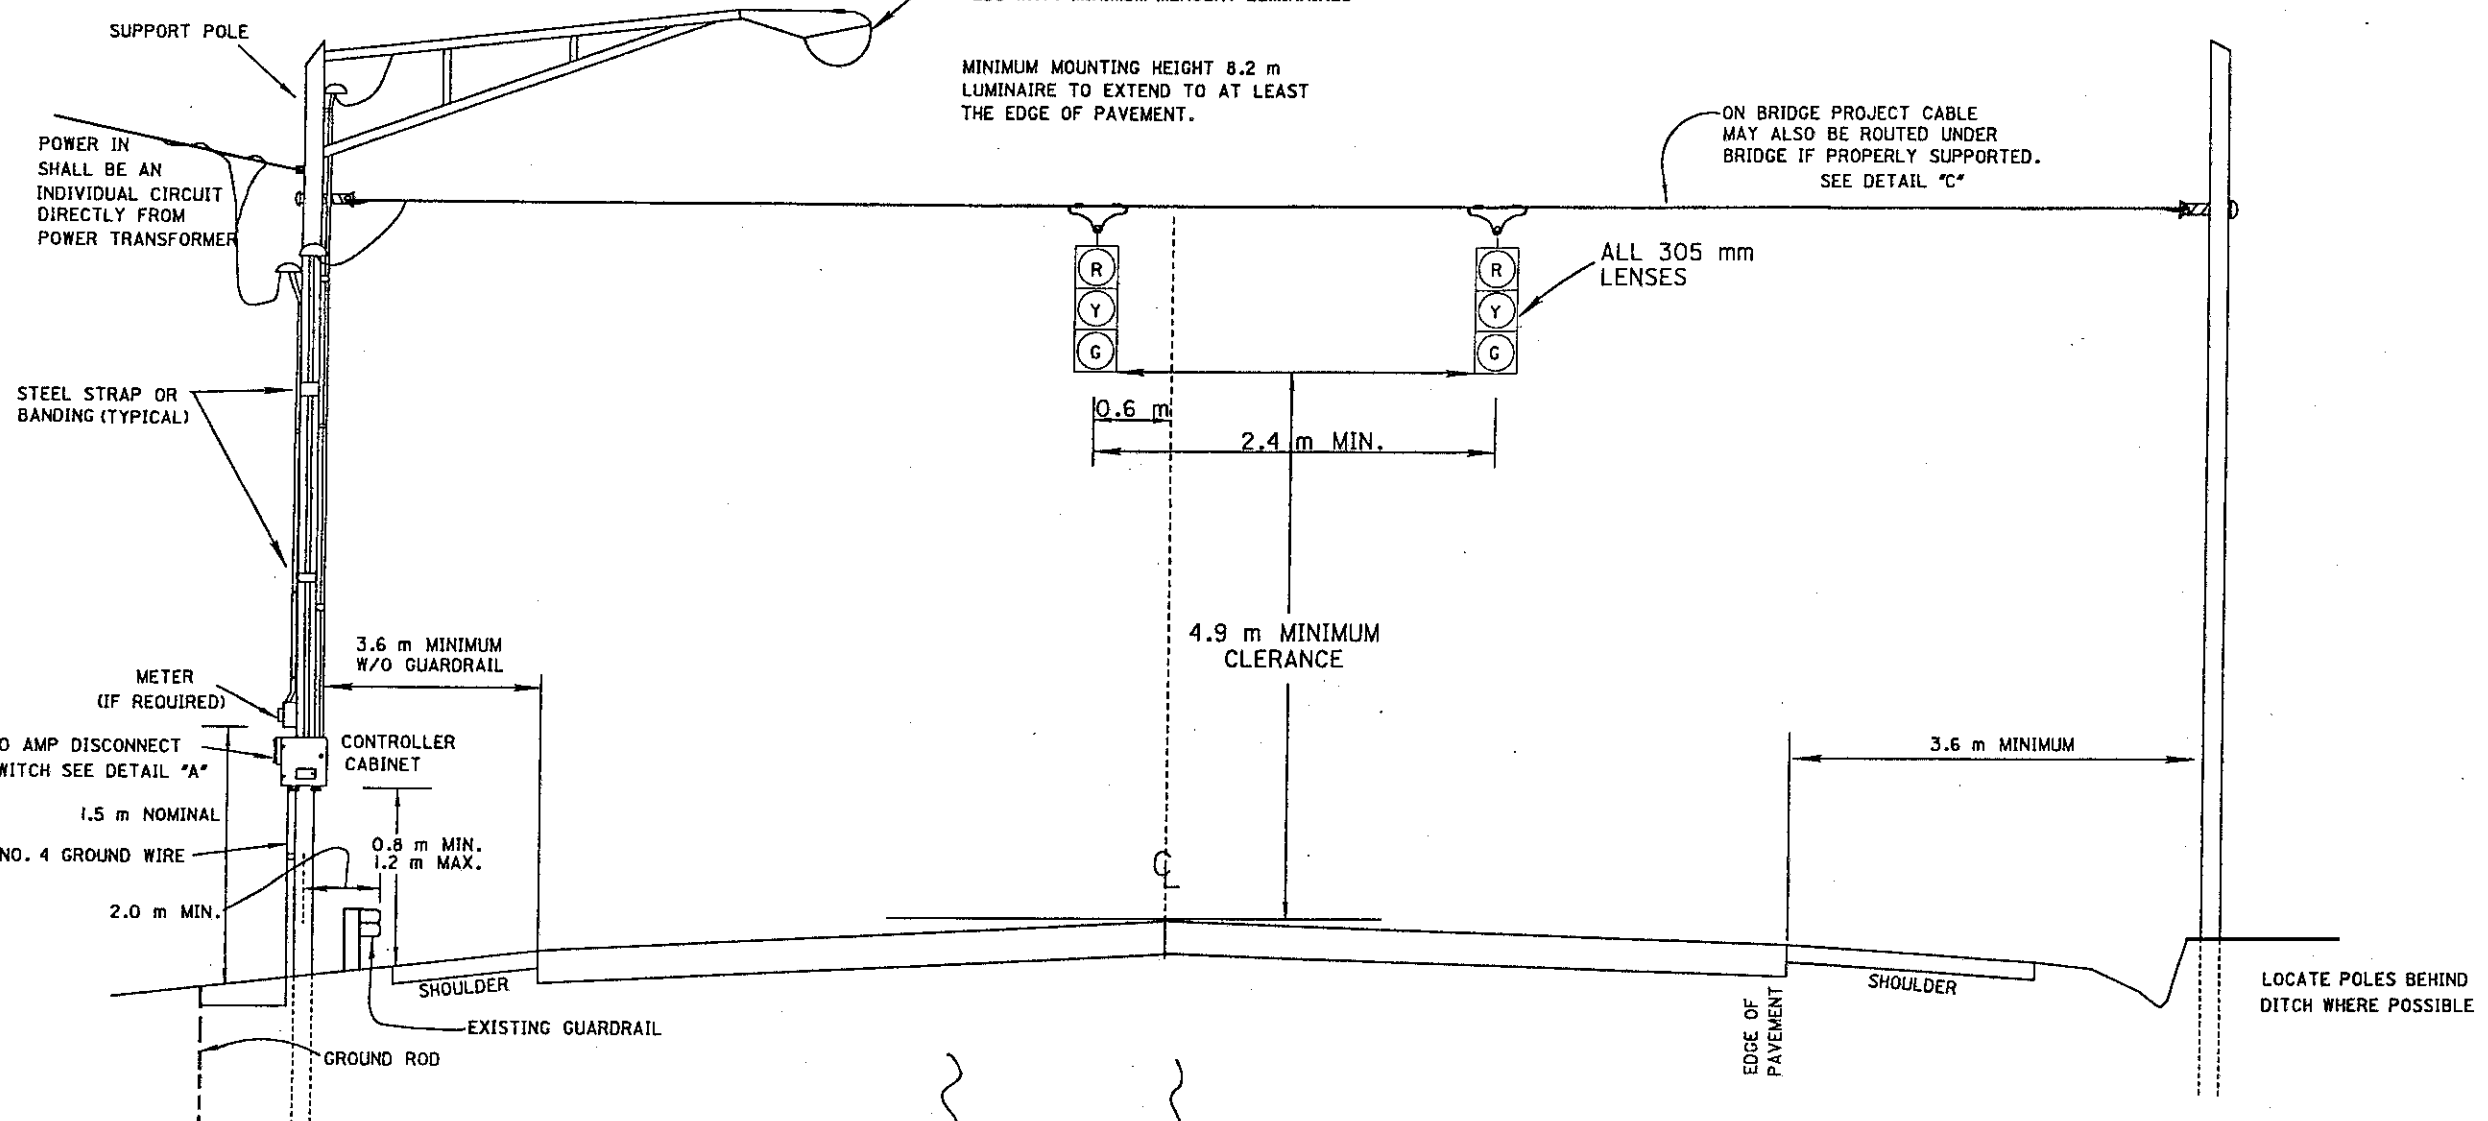


DETAIL "A"

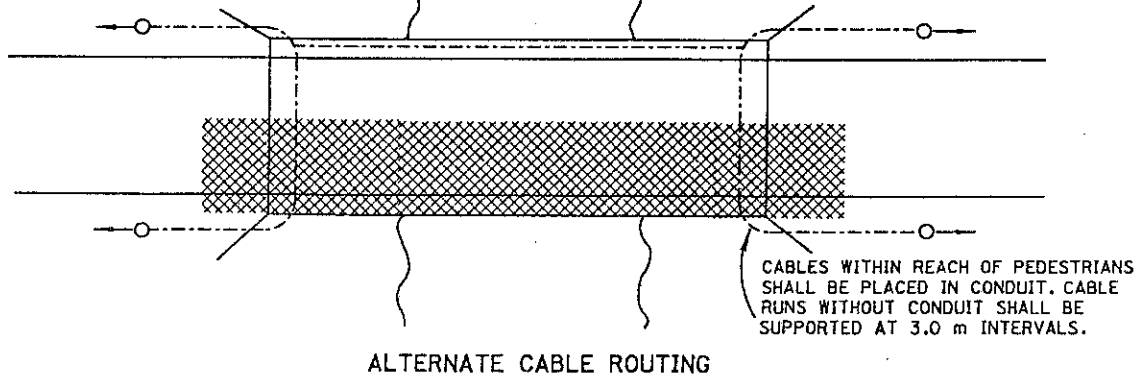

DETAIL "C"

| INTERVAL | 1 | 2 | 3 | 4 | 5 | 6 |
|----------|-----|-----|-----|-----|-----|-----|
| | — — | — — | — — | — — | — — | — — |

USING A PRETIMED CONTROL

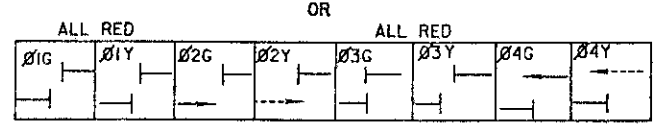

WHEN CALLED FOR IN THE PLANS, 02 GREEN AND 04 GREEN SHALL BE ACTUATED BY DETECTORS AT APPROACH TO THE WORK ZONE. 01 & 03 ARE DUMMY PHASES TO TIME ALL RED INTERVAL. TIMING INITIALIZES ON PHASE ONE.

USING A 4 PHASE ACTUATED CONTROL

DETAIL "B" SIGNAL PHASING

METRIC

BUREAU OF DESIGN SERVICES
DIVISION OF HIGHWAYS
OHIO DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC
DETAILS FOR SIGNALIZED
CLOSING 1 LANE OF A 2 LANE
HIGHWAY - OVERHEAD MOUNTED

STANDARD CONSTRUCTION DRAWING
DATE 01/30/95
APPROVED *[Signature]* ENGR. OF DESIGN SERVICES
MT-96.2IM