


90-gpa.dgn

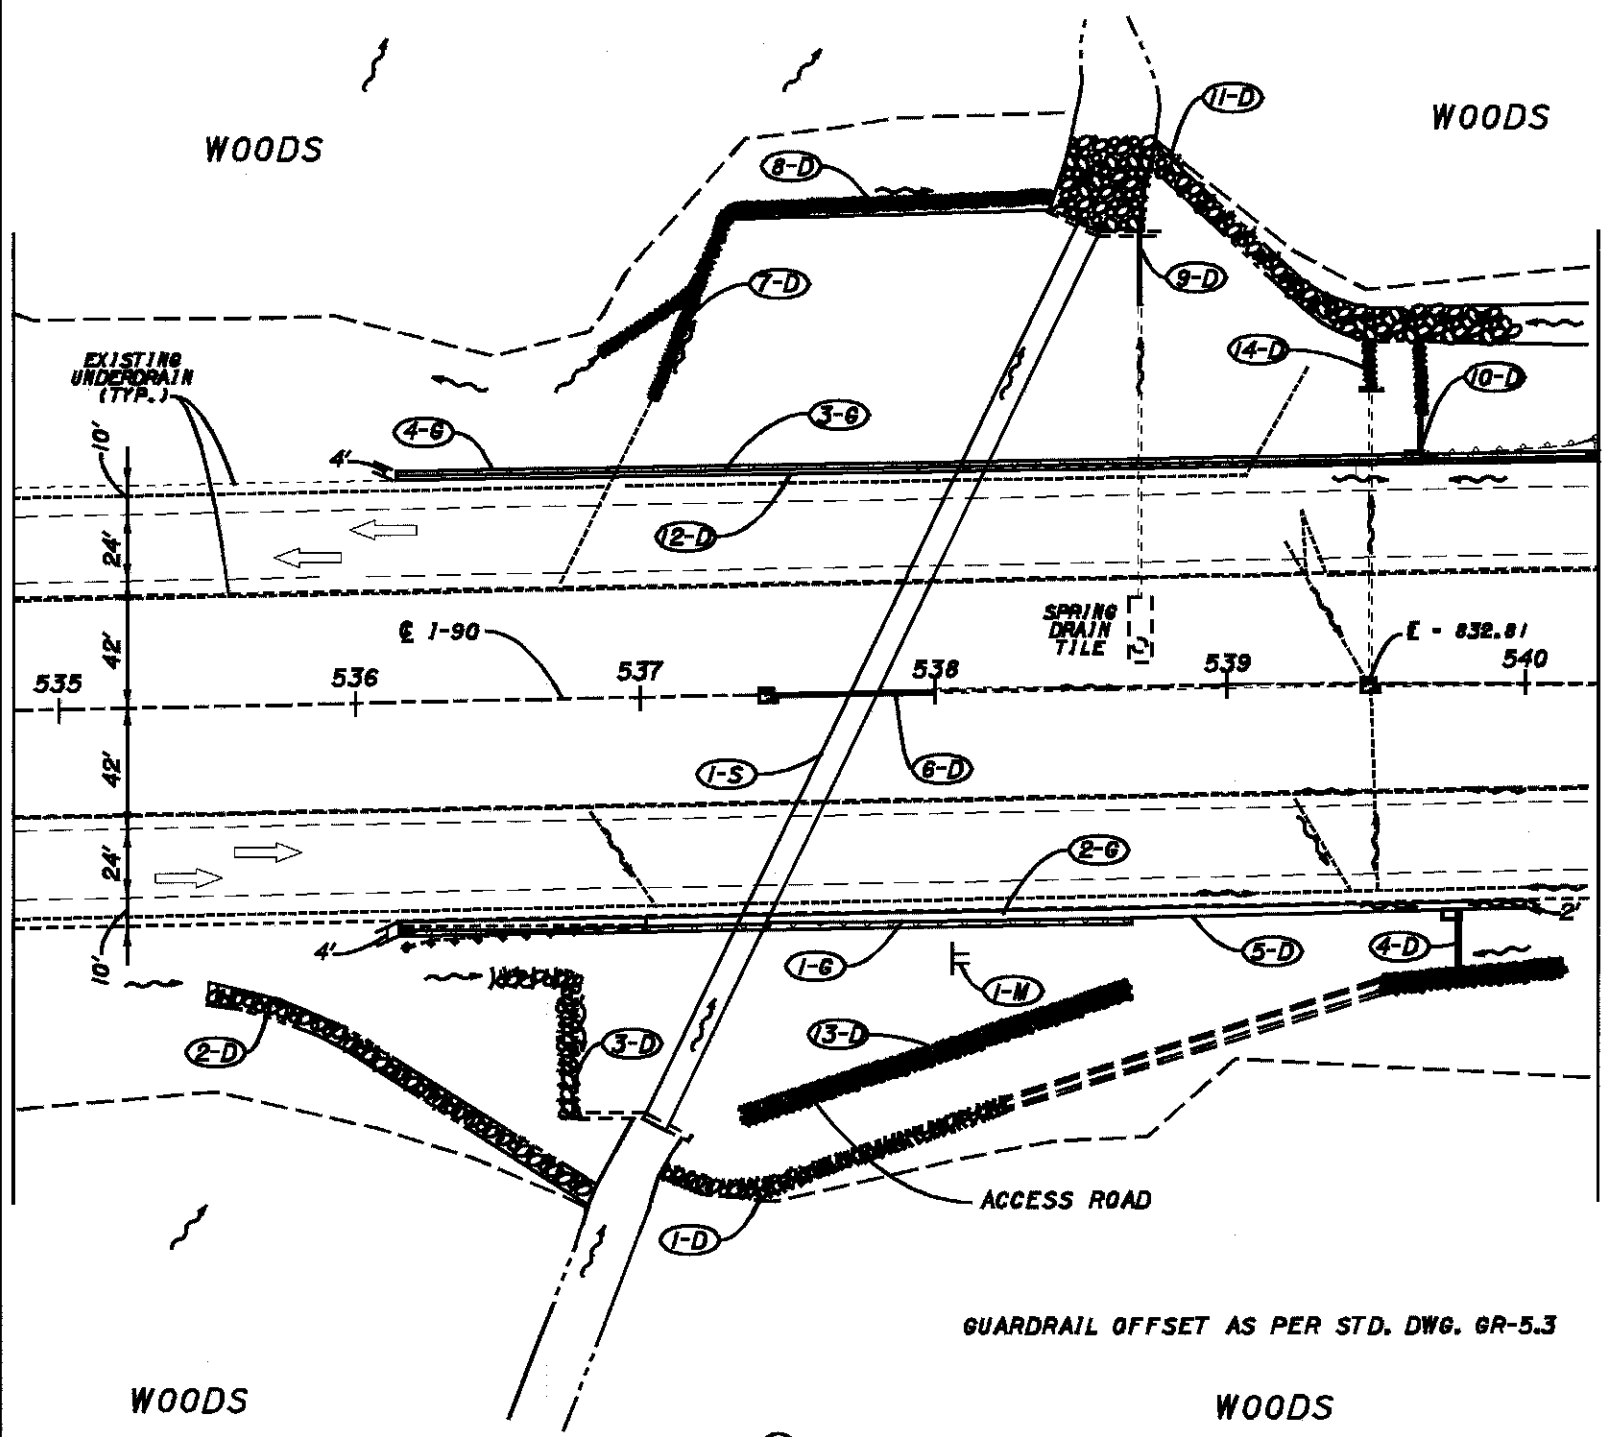

(G) GUARDRAIL

| REF. NO.                   | STATION |        | SIDE OR € | 202               | 203  | 252                        | 408                                   | 448   | 606               |                         |                         | 626                       |
|----------------------------|---------|--------|-----------|-------------------|--|----------------------------|---------------------------------------|---|-------------------|-------------------------|-------------------------|---------------------------|
|                            | FROM    | TO     |           | GUARDRAIL REMOVED | EXCAVATION NOT INCLUDING EMBANKMENT CONSTRUCTION | FULL DEPTH PAVEMENT SAWING | BITUMIN. PRIME COAT (0.4 GAL/SQ. YD.) | ASPHALT CONCRETE SURFACE COURSE, UNDER GUARDRAIL, TYPE I, PG 64-22, AS PER PLAN | GUARDRAIL, TYPE 5 | ANCHOR ASSEMBLY, TYPE E | ANCHOR ASSEMBLY, TYPE T | BARRIER REFLECTOR, TYPE A |
|                            |         |        | LIN. FT.  | CU. YD.           | LIN. FT.   | GALLON                     | CU. YD.                               | LIN. FT.  | EACH              | EACH                    | EACH                    |                           |
| 1-D                        | 536+15  | 538+65 | RT        | 250               |  |                            |                                       | 167.5   | 1                 | 1                       | 4                       |                           |
| 2-D                        | 538+15  | 539+00 | RT        |                   | 10   | 385                        | 46                                    | 10  |                   |                         |                         |                           |
| 3-D                        | 536+15  | 540+25 | LT        | 412.5             |  |                            |                                       | 350.0   | 1                 | 1                       | 5                       |                           |
| 4-D                        | 539+15  | 540+25 | LT        |                   | 15   | 410                        | 73                                    | 15  |                   |                         |                         |                           |
| <b>TOTALS TO GEN. SUM.</b> |         |        |           | 662.5             | 25   | 795                        | 119                                   | 25  | 2                 | 2                       | 9                       |                           |

(D) DRAINAGE

(\*\* SEE SHEET 4)

| REF. NO.                   | STATION |        | SIDE OR € | SLOPE % | 202                         | 203                            | DUMPED ROCK FILL, TYPE A | 601   | 8" CONDUIT, TYPE B | 603             | 15" CONDUIT, TYPE F, TOTALS, TYPE C | 604              | 609          |
|----------------------------|---------|--------|-----------|---------|-----------------------------|--------------------------------|--------------------------|---|--------------------|-----------------|-------------------------------------|------------------|--------------|
|                            | FROM    | TO     |           |         | PIPE REMOVED, 24" AND UNDER | EMBANKMENT, AS PER PLAN "B" ** |                          | ROCK CHANNEL PROTECTION, TYPE C W/FABRIC FILTER |                    | CONDUIT, TYPE D |                                     | INLET, NO. 2-A-6 | CURB, TYPE 6 |
|                            |         |        |           |         | CU. YD.                     | CU. YD.                        | CU. YD.                  | CU. YD.   | LIN. FT.           | LIN. FT.        | LIN. FT.                            | EACH             | LIN. FT.     |
| 1-D                        | 537+00  | 538+25 | RT        | --      |                             |                                | 20                       |   |                    |                 |                                     |                  |              |
| 2-D                        | 535+50  | 536+90 | RT        | --      |                             |                                | 21                       |   |                    |                 |                                     |                  |              |
| 3-D                        | 536+50  | 536+75 | RT        | --      |                             | 15                             |                          |   |                    |                 |                                     |                  |              |
| 4-D                        | 539+70  | --     | RT        | 3.0±    |                             | 10                             |                          |   |                    |                 | 20                                  | 1                |              |
| 5-D                        | 536+65  | 540+00 | RT        | --      |                             |                                |                          |   |                    |                 |                                     |                  | 335          |
| 6-D                        | 537+50  | 538+00 | €         | 0.66±   | 50                          |                                |                          |   |                    | 50              |                                     |                  |              |
| 7-D                        | 537+00  | --     | LT        | --      |                             | 15                             |                          |   |                    |                 |                                     |                  |              |
| 8-D                        | 537+00  | 538+25 | LT        | --      |                             | 20                             |                          |   |                    |                 |                                     |                  |              |
| 9-D                        | 538+70  | --     | LT        | 9.0±    | 30                          |                                |                          |   | 40                 |                 |                                     |                  |              |
| 10-D                       | 539+70  | --     | LT        | 3.0±    |                             | 6                              |                          |   |                    |                 |                                     | 1                |              |
| 11-D                       | 538+35  | 540+00 | LT        | --      |                             |                                | 90                       |   |                    |                 |                                     |                  |              |
| 12-D                       | 536+15  | 539+75 | LT        | --      |                             |                                |                          |   |                    |                 |                                     |                  | 360          |
| 13-D                       | 537+20  | 538+60 | RT        | --      | 20                          |                                |                          |   |                    |                 |                                     |                  |              |
| 14-D                       | 539+50  | --     | LT        | --      |                             | 3                              |                          |   |                    |                 |                                     |                  |              |
| <b>SUB TOTAL FOR ABOVE</b> |         |        |           |         | 80                          | 20                             | 131                      | 69  | 40                 | 50              | 30                                  | 2                | 695          |
| <b>EXTRA</b>               |         |        |           |         | --                          | 2                              | 14                       | 11  | --                 | --              | --                                  | --               | 70           |
| <b>TOTALS TO GEN. SUM.</b> |         |        |           |         | 80                          | 22                             | 145                      | 80  | 40                 | 50              | 30                                  | 2                | 765          |

(S) STRUCTURES

| REF. NO. | STATION |    | SIDE OR € | CONCRETE MISC. CULVERT INVERT RESTORATION |
|----------|---------|----|-----------|---|
|          | FROM    | TO |           |   |
|          |         |    | €         | LIN. FT.                                  |
| 1-S      | 537+75  | -- | €         | 342                                       |

(M) MISCELLANEOUS

| REF. NO. | STATION |    | SIDE OR € | REMOVAL OF GROUND MOUNTED SIGN AND REERECTION, AS PER PLAN |
|----------|---------|----|-----------|--|
|          | FROM    | TO |           |  |
|          |         |    | €         | €  |
| 1-N      | 538+06  | -- | RT        | 1  |

