
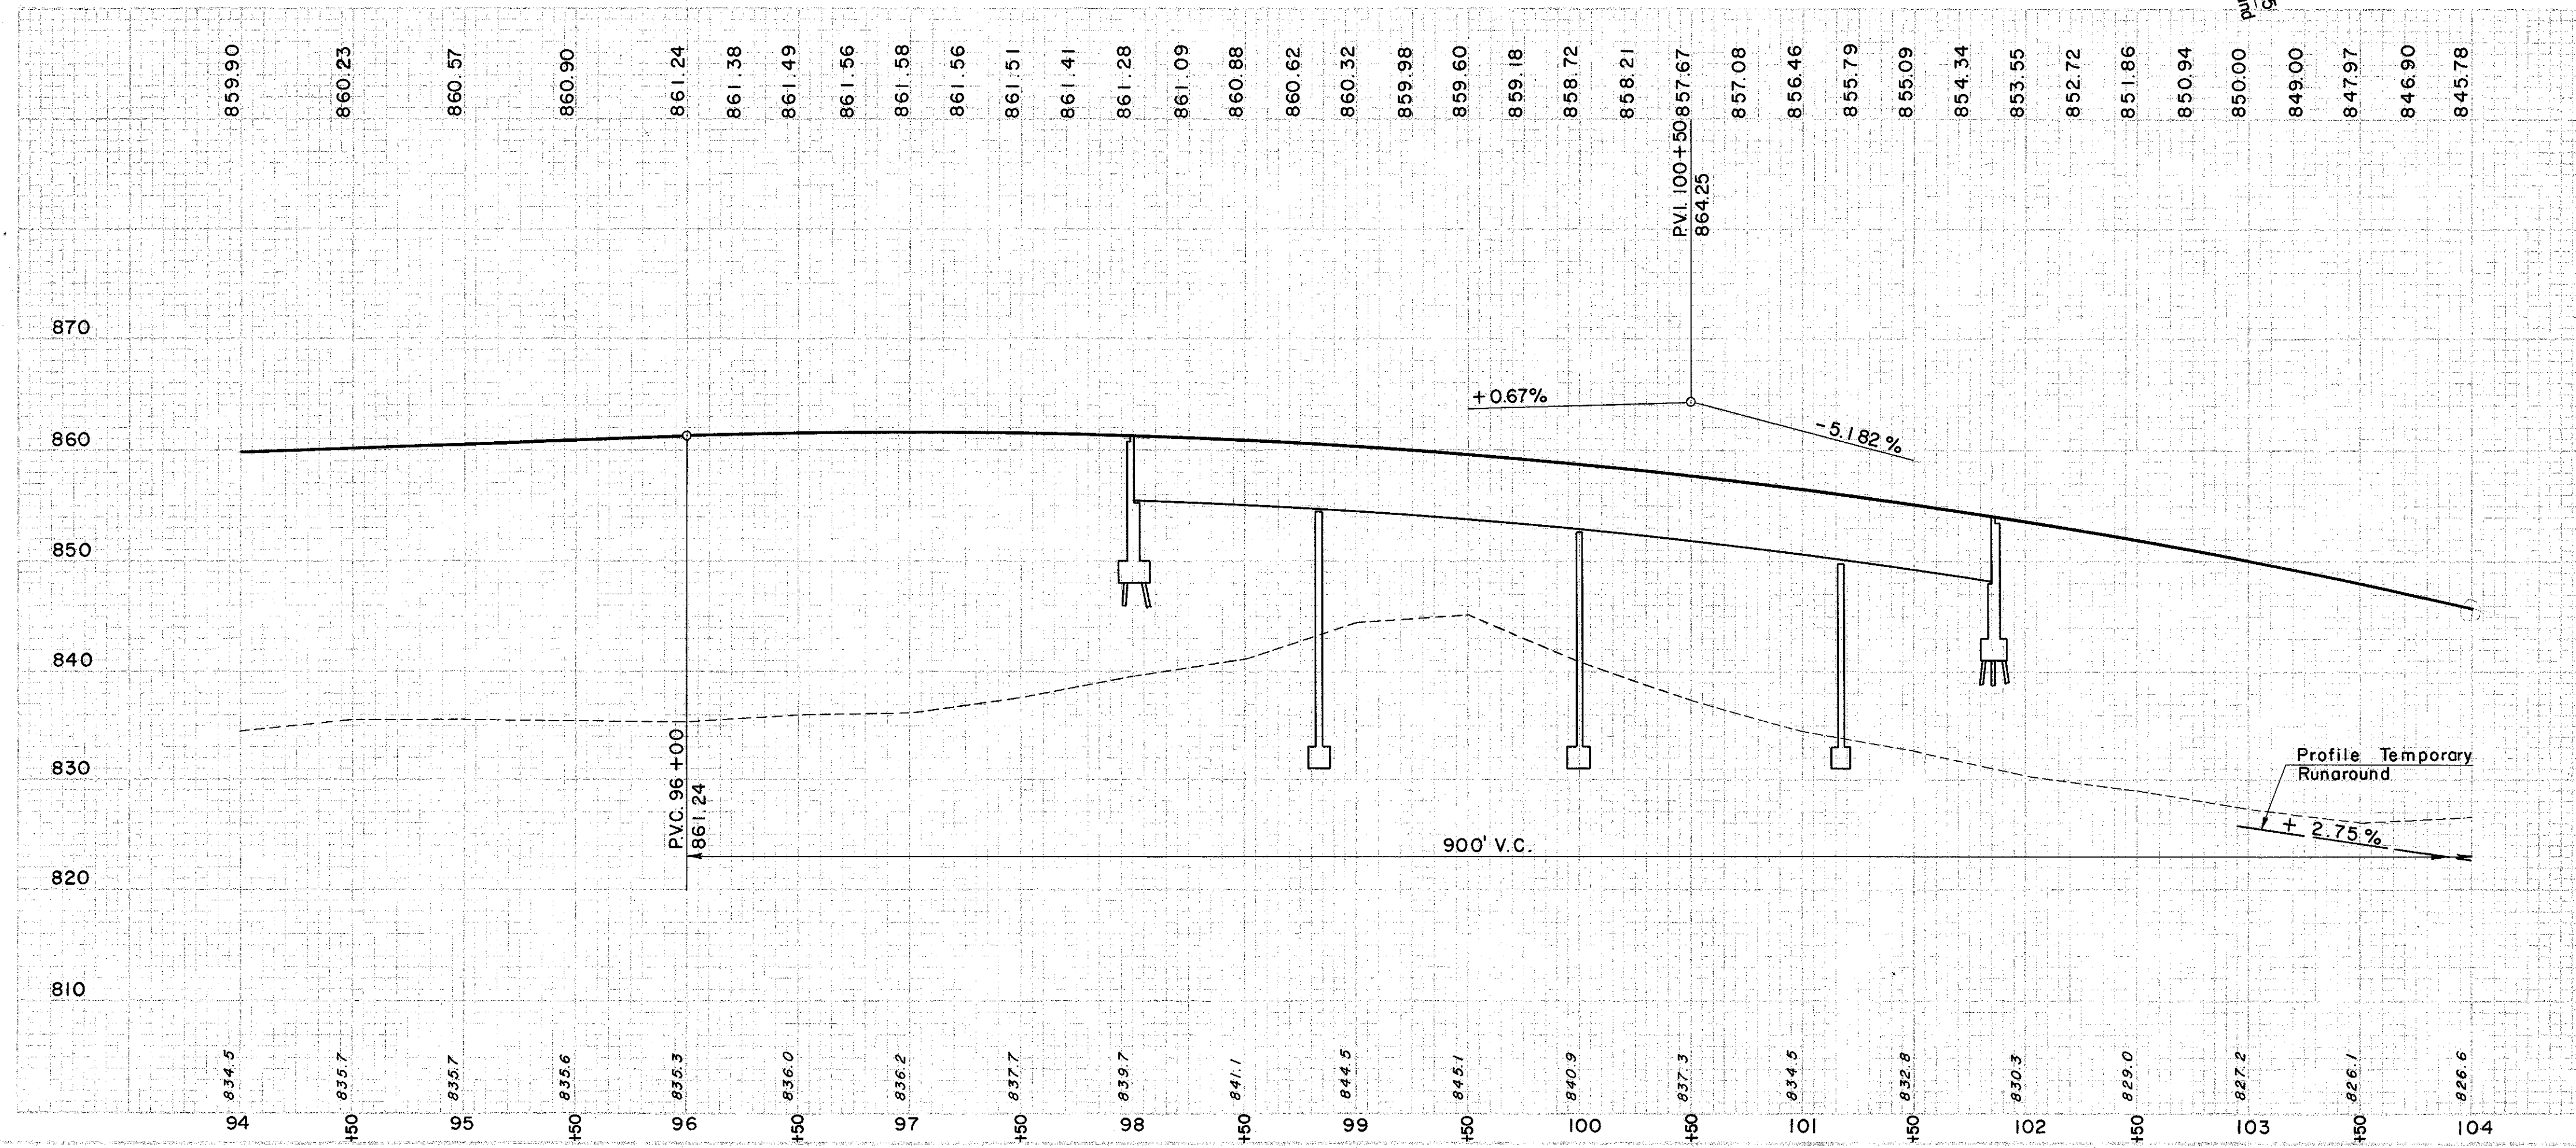
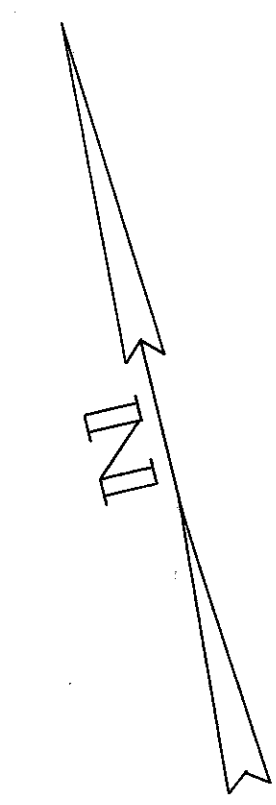


LAKE COUNTY
LAK-1-22.60

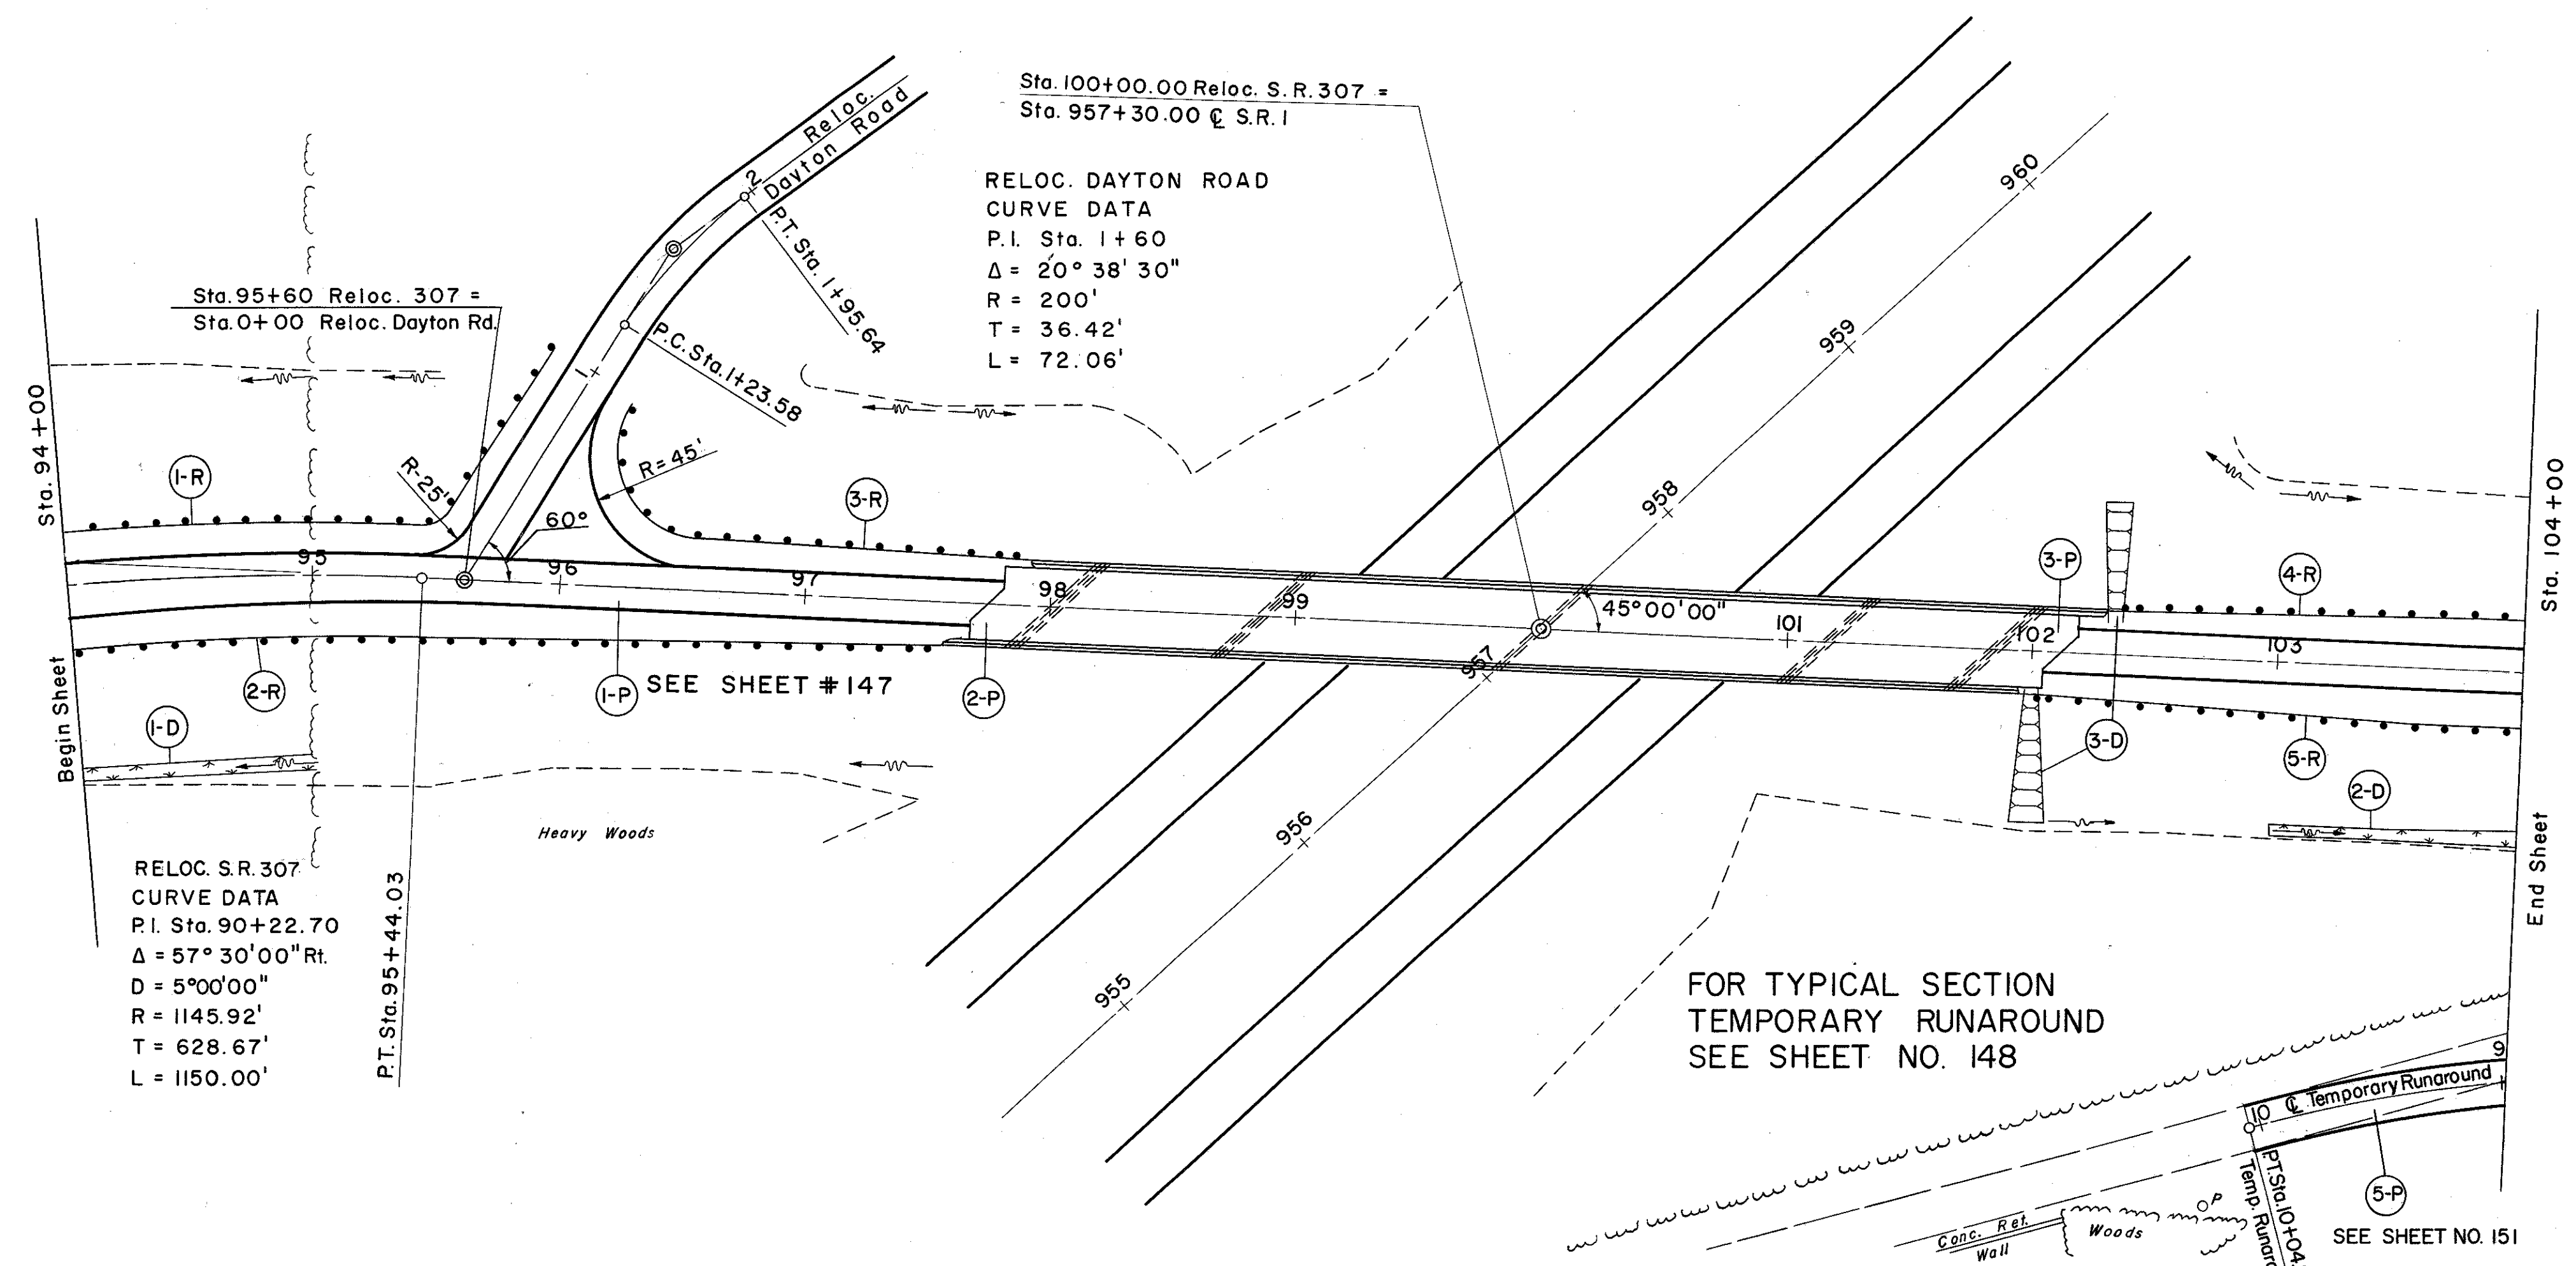

ROADWAY

REF. NO.	STATION	SIDE OR ϕ	RAIL STEEL BEAM TYPE (SHALLOW) #2-B	
			L.F.	TOTAL
1-R	94+00	HOOD DAYTON RD	237.5	
2-R	94+00	97+57 RT.	360.5	
3-R	HOOD DAYTON RD	97+92.5 LT.	112.5	
4-R	102+31	104+00 LT.	171	
5-R	101+95	104+00 RT.	206	
		TOTAL	1087.5	

ROADWAY

STATION	DEPTH OF SODDING	WIDTH OF SODDING	LENGTH	S. Y.
FT.	FT.	FT.	FT.	
94+00	0.35	2.1	2.1	3.5
95+00	0.4	2.1	2.1	3.5
103+00	0.1	4.1	2.1	2.5
104+00	0.35	4.1	2.1	4.0
				SUBTOTAL
				76

DRAINAGE

REF. NO.	STATION	FROM	TO	S. Y.	PROTECT.
1-D	94+00	95+00	RT. 40		
2-D	103+00	104+00	RT. 36		
3-D	102+00	102+40		105	

PAVEMENT

REF. NO.	STATION	FROM	TO	S. Y.
2-P	97+75	99	100.49	84
3-P	101+87	102	112.76	84
		TOTAL		168

EXCAVATION	=	225 C.Y.
EMBANKMENT	=	48,631 C.Y.
EMBANKMENT *22	=	59,330 C.Y.